

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31

Renewable Energy Guidance

Guidance for assessing the greenhouse gas impacts of renewable energy policies

First Draft, 26 July 2017

CONTENTS

PART I: Introduction, Objectives, Steps and Overview of Renewable Energy Policies	2
1. Introduction	2
2. Objectives of Assessing the GHG Impacts of RE Policies	6
3. Overview of Renewable Energy Policies	8
4. Steps and Assessment Principles	13
PART II: Defining the Assessment.....	20
5. Describing the Policy	20
6. Identifying Impacts: How RE Policies Reduce GHG Emissions	27
PART III: Assessing Impacts.....	34
7. Estimating RE Addition of the Policy Ex-Ante	34
8. Estimating GHG Impacts of the Policy Ex-Ante.....	58
9. Estimating GHG Impacts Ex-Post.....	70
PART IV: Monitoring and Reporting.....	73
10. Monitoring Performance Over Time.....	73
11. Reporting	78
Appendix A: Calculation of LCOE for RE Sources	81
Appendix B: Calculation of the Weighted Average Costs of Capital	83
Appendix C: Example RE Policies	85
Appendix D: Overview of Combined Margin Approach	95
Appendix E: Stakeholder Participation During the Assessment Process	98
Abbreviations and Acronyms	99
Glossary	100
References.....	105
Contributors.....	110

PART I: INTRODUCTION, OBJECTIVES, STEPS AND OVERVIEW OF RENEWABLE ENERGY POLICIES

1. INTRODUCTION

With the adoption of the Paris Agreement in 2015, governments around the world are increasingly focused on implementing policies and actions that achieve greenhouse gas (GHG) mitigation objectives. Electricity generation accounts for approximately 40% of global GHG emissions¹ and countries are increasingly implementing renewable energy policies to accelerate the move from fossil fuel to renewable sources of electricity generation. In this context, there is an increasing need to assess and communicate the impacts of energy policies and actions to ensure they are effective in delivering GHG mitigation and helping countries meet their sectoral targets and commitments.

Purpose of the guidance

This document provides methodological guidance for assessing the GHG impacts of renewable energy (RE) policies. The guidance provides a stepwise approach for estimating the effects of policy design characteristics, economic and financial factors, and other barriers on the potential for RE policies to achieve their maximum implementation potential. Guidance is provided to convert this impact (expressed in terms of newly installed renewable energy capacity or generated electricity) into GHG emission reductions.

This guidance is part of the Initiative for Climate Action Transparency (ICAT) series of guidance for assessing the impacts of policies and actions. It is intended to be used in combination with any other ICAT guidance documents that users choose to apply. The series of guidance is intended to enable users that choose to assess GHG impacts, sustainable development impacts and transformational impacts of a policy to do so in an integrated and consistent way within a single impact assessment process. Refer to the ICAT *Introductory Guide* for more information about the ICAT guidance documents and how to apply them in combination.

Intended users

This guidance is intended for use by policymakers and practitioners seeking to estimate GHG mitigation impacts in the context of Nationally Determined Contribution (NDC) development and implementation, national low carbon strategies, and Nationally Appropriate Mitigation Actions (NAMAs) and other mechanisms. The primary intended users are developing country governments and their partners who are implementing and assessing RE policies. Throughout the guidance, the term “user” refers to the entity implementing the guidance.

The main emphasis of the guidance is on the assessment of GHG impacts. Impact assessment can also inform and improve the design and implementation of policies. Thus, the intended users include any

¹ IEA 2015. Available at: <https://www.iea.org/publications/freepublications/publication/WEO2015SpecialReportonEnergyandClimateChange.pdf>.

1 stakeholders involved in the design and implementation of national energy policies, strategies, NDCs or
2 NAMAs, including research institutions, businesses and non-governmental organisations.

3 Scope and applicability of the guidance

4 This guidance provides general principles, concepts and a stepwise method for estimating the GHG
5 impacts of three types of RE policies²:

- 6 • **Feed-in tariff policies (including feed-in premiums):** Policies that aim to promote RE
7 deployment by offering long-term purchase agreements with RE developers at a specified price
8 per kilowatt-hour (kWh)
- 9 • **Auction policies (including tender policies):** Competitive bidding procurement processes for
10 renewable electricity in the form of either capacity (MW) or electricity generated (MWh)
- 11 • **Tax incentive policies:** Policies under which authorities at the national, subnational or municipal
12 level offer tax incentives for the installation and operation of RE installations

13 These types of RE policies form the core of many policy packages that countries are using to promote RE
14 and are further discussed in Chapter 3. RE can also be promoted via economic instruments (such as
15 emission trading programs or carbon taxes), actions to change the regulatory environment (such as grid
16 access), priority dispatch and wheeling, and capacity building programmes (such as energy service
17 company development initiatives). However, the focus of this guidance is on policies that specifically
18 target RE deployment, and these other types of instruments and actions are only discussed peripherally
19 in this guidance.

20 This guidance details a process for users to follow when conducting a GHG assessment of RE policies. It
21 provides guidance on defining the assessment, an approach to GHG assessment including ex-ante
22 (forward-looking) assessments and ex-post (backward-looking) assessments, and monitoring and
23 reporting. Throughout the document, examples and case studies [*to be developed*] are provided to
24 illustrate how to apply the guidance.

25 The guidance is applicable to policies:

- 26 • At any level of government (national, subnational, municipal) in all countries and regions
- 27 • That are planned, adopted or implemented
- 28 • That are new policies or actions, or extensions, modifications or eliminations of existing policies
29 or actions

30 When to use the guidance

31 The guidance can be used at multiple points in time throughout the policy design and implementation
32 process, including:

- 33 • **Before policy implementation:** To assess the expected future impacts of a policy (through ex-
34 ante assessment)

² Throughout this guidance, where the word “policy” is used without “action,” it is used as shorthand to refer to both policies and actions. See Glossary for definition of “policies or actions”.

- 1 • **During policy implementation:** To assess the achieved impacts to date, ongoing performance
2 of key performance indicators, and expected future impacts of a policy
- 3 • **After policy implementation:** To assess what impacts have occurred as a result of a policy
4 (through ex-post assessment)

5 Depending on individual objectives and when the guidance is applied, users can implement the steps
6 related to ex-ante assessment, ex-post assessment or both. The most comprehensive approach is to
7 apply the guidance first before implementation, regularly during policy implementation and again after
8 implementation. Users carrying out an ex-post assessment only skip Chapters 7 and 8. Users carrying out
9 an ex-ante assessment only skip Chapter 9.

10 Key recommendations

11 The guidance includes *key recommendations* that represent recommended steps to follow when
12 assessing and reporting impacts. These recommendations are intended to assist users in producing
13 credible impact assessments that pursue high quality and based on the principles of relevance,
14 completeness, consistency, transparency and accuracy.

15 In keeping with ICAT guidance being non-prescriptive, the key recommendations focus on the key steps
16 that users are recommended to follow, rather than on any specific methods, models or tools they might
17 use. Key recommendations focus more on the “what” users should do than the “how” they can do it. The
18 guidance that accompanies each key recommendation provides the “how.”

19 Key recommendations are indicated in subsequent chapters by the phrase “It is a *key recommendation*
20 to...” All key recommendations are also compiled in a checklist at the beginning of each chapter.

21 Key recommendations are provided as an option to users that want to assess and report impacts
22 according to a consistent set of steps and approaches. Users that want to follow a more flexible approach
23 can choose to use the guidance without adhering to the key recommendations.

24 The ICAT *Introductory Guide* provides further description of how and why key recommendations are used
25 within the ICAT guidance documents, as well as more information about following either the “flexible
26 approach” or the “key recommendations” approach when using the guidance. Refer to the *Introductory*
27 *Guide* before deciding on which approach to follow.

28 Relationship to other guidance and resources

29 This guidance uses and builds on existing resources mentioned throughout the document. This includes
30 CDM large-scale consolidated methodology *ACM0002: Grid-connected electricity generation from*
31 *renewable sources*, and CDM *Tool to calculate the emission factor for an electricity system*.

32 The guidance is consistent with the WRI *Policy and Action Standard*³ and the *Draft Policy and Action*
33 *Standard – Energy Supply Sector guidance*⁴, both of which provides guidance on estimating the
34 greenhouse gas impacts of policies and actions and discussion on many of the accounting concepts in

³ WRI 2014. Available at: <http://www.ghgprotocol.org/policy-and-action-standard>.

⁴ Available at: http://www.ghgprotocol.org/sites/default/files/ghgp/standards_supporting/Energy%20Supply%20-%20Additional%20Guidance.pdf.

1 this document, such as baseline and policy scenarios. This guidance adapts the structure and some of
2 the tables, figures and text from the *Policy and Action Standard* where relevant. Figures and tables
3 adapted from the *Policy and Action Standard* are cited, but for readability not all text taken directly or
4 adapted from the standard is cited.

5 A full list of references is provided at the end of this document.

6 Process for developing the guidance

7 This guidance is being developed through an inclusive, multi-stakeholder process convened by the
8 Initiative for Climate Action Transparency. The development is led by the NewClimate Institute (technical
9 lead) and VCS (co-lead), who serve as the Secretariat and guide the development process. A Technical
10 Working Group (TWG) contributes to the development of the technical content for the guidance through
11 participation in regular meetings and written comments. The energy sector TWG contributes to both the
12 ICAT *Renewable Energy Guidance* and the *Buildings Efficiency Guidance*. The TWG consists of experts
13 and stakeholders from a range of countries identified through a public call for expressions of interest.

14 The renewable energy sector was selected based on a set of criteria compiled with input from the TWG.
15 The selection was reached after all options were ranked against a set of criteria which included:

- 16 • Role of the subsector in countries' NDCs
- 17 • Emission reductions potential
- 18 • Extent to which policies for the subsector exist in countries
- 19 • Current and future emissions levels/share of subsector emissions
- 20 • Potential lock-in/transformation
- 21 • Gaps in available guidance
- 22 • Investment needs under a 1.5-2 °C temperature goal

23 A Review Group will provide written feedback on multiple drafts of the guidance. The drafts will also be
24 circulated for public consultation more broadly. The draft guidance will be tested with ICAT participating
25 countries and other interested countries to ensure that it can be practically implemented, gather feedback
26 for its improvement and provide case studies for the final publication. Anyone interested in testing the
27 guidance is encouraged to get in touch with the ICAT team.

28 ICAT's Advisory Committee provides strategic advice to the initiative. More information about the
29 guidance development process, including governance of the initiative and the participating countries, is
30 available on the ICAT website.

31 All contributors are listed in the *Contributors* section.

2. OBJECTIVES OF ASSESSING THE GHG IMPACTS OF RE POLICIES

This chapter provides an overview of objectives users may have in assessing the GHG impacts of renewable energy policies. Determining the assessment objectives is an important first step, since decisions made in later chapters are often be guided by the stated objectives.

Checklist of key recommendations

- Determine the objectives of the assessment at the beginning of the impact assessment process

Assessing the GHG impacts of RE policies is a key step towards developing effective GHG mitigation strategies. Impact assessment supports evidence-based decision making by enabling policymakers and stakeholders to understand the relationship between policies and expected GHG impacts. It is *key recommendation* to determine the objectives of the assessment at the beginning of the impact assessment process.

Examples of objectives for assessing the GHG impacts of a policy are listed below. The ICAT *Sustainable Development Guidance* can be used to assess the broader sustainable development impacts of RE policies and users should refer to that guidance for objectives for assessing such impacts.

General objectives

- **Estimate the GHG impacts of policies to determine whether they are on track to meet goals** such as NDCs or RE targets
- **Maximise positive impacts** of policies, such as increased GHG emission reductions, RE capacity addition, and RE electricity generation
- **Ensure that policies are cost-effective** and that limited resources are invested efficiently

Objectives of assessing impacts before policy implementation

- **Improve policy design and implementation** by understanding the impacts of different design and implementation choices
- **Inform goal setting** by assessing the potential contribution of policies to national goals and targets, such as NDCs
- **Access financing** for policies by estimating potential GHG emission reductions, or by estimating the RE capacity addition and RE electricity generation

Objectives of assessing impacts during or after policy implementation

- **Assess policy effectiveness** by determining whether RE policies are delivering the intended results
- **Improve policy implementation** by determining whether RE policies are being implemented as planned
- **Inform future policy design** and decisions on whether to continue current actions, enhance current actions, or implement additional actions

- 1 • **Learn from experience and share best practices** about policy impacts
- 2 • **Track progress toward national goals and targets** such as NDCs and understand the
- 3 contribution of policies toward achieving them
- 4 • **Report**, domestically or internationally, on the impacts of policies achieved to date
- 5 • **Meet funder requirements** to report on GHG emissions reductions or RE capacity addition, RE
- 6 electricity generation

7 Users should also identify the intended audience(s) of the assessment report. Possible audiences include
8 policymakers, the general public, NGOs, companies, funders, financial institutions, analysts, research
9 institutions, or other stakeholders affected by or who can influence the policy or action. For more
10 information on identifying stakeholders, refer to the ICAT *Stakeholder Participation Guidance* (Chapter 5).

11 Subsequent chapters provide flexibility to enable users to choose how best to assess the impacts of
12 policies and actions in the context of their objectives, including which impacts to include in the GHG
13 assessment boundary and which methods and data sources to use. The appropriate level of accuracy
14 and completeness is likely to vary by objective. Users should assess the impacts of their policies with a
15 sufficient level of accuracy and completeness to meet the stated objectives of the assessment.

16

17

3. OVERVIEW OF RENEWABLE ENERGY POLICIES

Historically energy markets alone have not been able to deliver the desired level of renewable deployment in many countries, national, subnational and municipal level support policies have been needed to overcome market failures and to spur increased investment in RE. These policies help to reduce the cost of production, increase the price at which RE is sold, or increase the volume of RE purchased. This chapter provides an overview of the three types of renewable energy policy covered by the guidance.

3.1 Development of renewable energy policy

The declining costs of many RE technologies, changes in the prices of fossil fuels and a rising number and variety of government policies have all driven increased growth in the deployment and use of RE in recent years.

Prior to the 1990s, few countries had implemented policies to promote RE. Most early policies were implemented in developed countries, but an increasing number of developing countries have enacted policies since the early 2000s. RE policies are designed with the intent of overcoming various barriers that can impede technology development and deployment. The diverse set of policies that promote RE diffusion aims to incentivise RE deployment in different ways.

Several types of RE policies exist. Table Table 3.1 provides the number and share of countries globally that have implemented RE policies.

Table 3.1: Overview of policy instruments in the energy supply sector

Type of policy instrument	Number of countries	Share of countries
Reduction in sales, energy, carbon, value-added or other taxes	98	52%
Public investment, loans or grants	82	43%
Feed-in tariff and feed-in premium policies	81	43%
Biofuels obligations and mandates	66	35%
Auctions and tenders	64	34%
Capital subsidy, grant or rebate	58	31%
Net metering	52	27%
Investment or production tax credits	45	24%
Electric utility quota obligation and renewable portfolio standards	29	15%
Tradable renewable energy credits	29	15%

Energy production payment ⁵	25	13%
Heat obligations and mandates	21	11%

1 Source: REN21 2016.

2 Feed-in tariff policies are price-based instruments that provide a fixed guaranteed electricity price or a
 3 fixed or fluctuating price premium. Auctions and tender policies are quantity-based instruments that set
 4 the fixed amount of electricity generation from renewable sources to be achieved, where the market
 5 determines the price. Tax incentive policies use the tax system to improve the financial viability of RE
 6 investments.

7 There is no one-size-fits-all policy. Some policy elements have been shown to contribute to success more
 8 than others. In general, some key RE policy elements include⁶:

- 9 • Contributing to a rate of return that allows recovery of costs at a rate appropriate to the risk of
 10 investment
- 11 • Guaranteed access to networks and markets
- 12 • Long-term contracts to reduce risk
- 13 • Provisions that account for diversity of technologies and applications
- 14 • Incentives that decline predictably over time as technologies and/or markets mature
- 15 • Broad inclusiveness with potential for participation

16 Some RE policies are planned with a cap that can be attained where the policy is implemented in an
 17 optimal manner. Other RE policies may provide a separate cap or no cap at all. Depending on the country
 18 circumstances, regulatory agencies and public utilities may have the responsibility of designing and
 19 implementing RE policies, but non-governmental and private actors may also have a large role to play.

20 3.2 Types of RE policies covered by the guidance

21 Feed-in tariff policy

22 A feed-in tariff policy is a one that aims to promote RE deployment by offering long-term purchase
 23 agreements with RE developers at a specified price per kilowatt-hour.

24 In this guidance feed-in tariff policies also include feed-in premiums, which provide RE developers a
 25 premium on top of the market price of their electricity production. Premiums can either be fixed at a
 26 constant level independent of market prices or sliding with variable levels that depend on market prices.

⁵ The REN21 glossary defines an energy production payment as a “direct payment of the government per unit of renewable energy produced”, whereas a feed-in tariff is defined as a “policy that sets a price that is guaranteed over a certain period of time at which power producers can sell renewably generated electricity into the grid” (REN21 2016). A feed-in tariff in that sense is a particular type of the energy production payment. Feed-in tariff policies can therefore be seen as the most prevalent policy type.

⁶ Adapted from IPCC Special Report on Renewable Energy Sources and Climate Change Mitigation, 2012.

1 They provide market certainty for developers by guaranteeing payments that are usually awarded as
2 long-term contracts for a period of 15 to 20 years.

3 Feed-in tariffs and feed-in premiums have been globally successful in promoting most renewable
4 technologies including wind, solar photovoltaic, solar thermal, geothermal, biogas and biomass.
5 Successful feed-in tariffs and feed-in premiums tend to encourage a diverse array of technologies and
6 have been used for projects of varying sizes. They have been widely successful due to the inclusion of
7 many of the following elements⁷:

- 8 • Tariffs for all potential generators, including utilities
- 9 • Tariffs guaranteed for a long enough time period to ensure an adequate rate of return
- 10 • Tariff payment levels with carefully calculated starting values based on cost of generation and
11 differentiated by technology type and project size
- 12 • Property access and dispatch
- 13 • Utility purchase obligation
- 14 • Regular long-term design evaluations and short-term payment level adjustments

15 Auction policy

16 Auction policies for RE generation contracts create a competitive environment to procure renewable
17 electricity through a defined selection process. In this guidance, “auction policies” refers to both auction
18 and tender policies.

19 Under these policies, governments issue a request for bids for the total investment cost of a project or for
20 the cost per unit of electricity. An auction process will generally involve an open bidding process, whereas
21 with tenders the bidding is done in confidence. They are usually designed with a total capacity of projects
22 that will be funded. The government then selects multiple winning bids until the total capacity reaches the
23 auction capacity goals.

24 There are several trade-offs pertaining to specific design elements of auction and tender policies:

- 25 • Demand: Trade-off between ambition for an increasing share of renewables and cost-
26 effectiveness may be manifested through the decision to introduce a technology-specific auction
27 to develop a specific technology, or a technology-neutral auction to allow competition, which
28 favours more cost-competitive technologies
- 29 • Qualification requirement: Trade-off between reducing entry barriers to encourage competition
30 and discouraging underbidding
- 31 • Winner selection process: Trade-off between keeping the process simple and transparent and
32 ensuring that the objectives are achieved by the auction
- 33 • Sellers’ liabilities: Weighing the allocation of risks between the project developer and the
34 auctioneer, and exercising caution on the over allocation of risks to developers

⁷ Edenhofer et al. 2011.

1 In some cases, auctions and tenders can be cheaper and easier to administer. However, price
2 competition may favour larger and more established players such as utilities or public companies to the
3 detriment of smaller players. Due to high administrative or financial qualification requirements, there may
4 be too few bidders, which may impede the realisation of the true low-cost potential.

5 Policymakers might consider using technology-specific tenders to enable a diverse supply, or they may
6 consider adding local content rules, which require the use of a certain percentage of local equipment or
7 local ownership of the project. In return, there may be an offer of lower interest rates, local tax benefits or
8 even bonus payments for local developers, which can benefit communities and prevent excess imports of
9 the cheapest technologies.

10 Tax incentive policy

11 Various types of tax incentive policies are available for the development and deployment of RE
12 technologies. Many governments use tax policies to promote RE sources for electricity generation. There
13 are wide variety of tax incentives types, including:

- 14 • Value added tax (VAT) exemption
- 15 • Income tax exemption
- 16 • Import or export fiscal benefit
- 17 • Sales tax exemptions
- 18 • National exemption of local taxes
- 19 • Accelerated depreciation
- 20 • Property tax incentives
- 21 • Tax credits
- 22 • Exemptions from local taxes
- 23 • RE-specific taxes such as a geothermal vapour tax or geothermal surface tax
- 24 • Other fiscal benefits

25 Tax incentives usually apply to services and equipment, and pre-investment expenses are related to RE
26 projects, as well as income from the sale of electricity or other ancillary income. Policymakers can further
27 opt for fiscal stability incentives, whereby eligible RE technologies are shielded from potential future
28 changes in their fiscal regime or any additional fees.

29 Tax incentive policies are effective when linked to the generation of electricity and not just the installation
30 of capacity. Different tax incentive policies listed above may also be jointly implemented at the national,
31 subnational or municipal level.

32 3.3 Policy caps

33 There are several RE policy setups to which the guidance is applicable. It is an increasingly common
34 practice to set a cap as part of a feed-in tariff policy either at a maximum per year or over the lifetime of
35 the policy.

1 Policy caps are implicit in the design of auctions and tender policies. Under these policies, a certain
 2 quantity is auctioned/tendered, serving as the cap on either the number of installations, MW installed, or
 3 electricity generated. Table 3.2 explains how the guidance is applicable to each RE policy setup, and to
 4 which policies each setup may apply.

5 *Table 3.2: Overview of RE policy setups to which the guidance is applicable*

RE policy setup	Applicability of guidance	RE policies to which guidance is applicable
A cap is part of a policy. Either the cap is inherent in the policy setup or added as a separate cap (e.g., capped feed-in tariff)	Guidance helps users assess whether there are any factors preventing the policy from reaching its cap (e.g., whether the scope is too limited or barriers exist that hinder the policy's impact)	<ul style="list-style-type: none"> • Auction policies • Feed-in tariff policies with a cap
A separate target exists in the country which the policy aims to achieve (e.g., an RE target such as 25% RE by 2025)	Guidance helps users assess whether the policy is sufficiently ambitious to achieve the target, or whether there are factors that may reduce the effectiveness of the policy	<ul style="list-style-type: none"> • Feed-in tariff policies with national RE target in place • Tax incentive policies with national RE target in place
No target exists; nor does the policy provide an indication of the impact that should be achieved	Guidance helps users assess the impact of the policy based on its design and other factors	<ul style="list-style-type: none"> • Standalone feed-in tariff policies • Standalone tax incentive policies

6

7

1 4. STEPS AND ASSESSMENT PRINCIPLES

2 *This chapter provides an overview of the steps involved in assessing the GHG impacts of RE policies,*
 3 *and outlines assessment principles to help guide the assessment.*

4 Checklist of key recommendations

- Base the assessment on the principles of relevance, completeness, consistency, transparency and accuracy

5 4.1 Overview of steps

6 4.1.1 General overview of steps

7 This guidance is organised according to the steps a user follows to assess the GHG impacts of a RE
 8 policy (see Figure Figure 4.1). Depending on when the guidance is applied, certain chapters are skipped.
 9 For example, for ex-post assessments users can skip Chapters 7 and 8.

10 *Figure 4.1: Overview of steps*

Part I: Introduction, objectives, steps and overview of renewable energy policies

Understand the purpose and applicability of the guidance (Chapter 1)
 Determine the objectives of the assessment (Chapter 2)
 Understand renewable energy policies (Chapter 3)
 Understand assessment steps and principles (Chapter 4)



Part II: Defining the assessment

Clearly describe the policy to be assessed (Chapter 5)
 Identify GHG impacts, define the GHG assessment boundary and assessment period (Chapter 6)



Part III: Assessing impacts

Estimate RE addition of the policy ex-ante (Chapter 7)
 Estimate GHG impacts of the policy ex-ante (Chapter 8)
 Estimate GHG impacts of the policy ex-post (Chapter 9)



Part IV: Monitoring and reporting

Identify key performance indicators and parameters to monitor and develop a monitoring plan (Chapter 10)
 Report the results and methodology used (Chapter 11)

11

1 4.1.2 Estimating a GHG emission level vs. GHG emission reductions


2 The guidance can be used to estimate either a GHG *emission level* or GHG *emission reductions* (either
 3 can be done ex-ante or ex-post). The choice is guided by the user’s objectives in undertaking the impact
 4 assessment.

5 Estimating a GHG emission level

6 Estimating an emission level is relevant where the objective is to evaluate the performance of the policy in
 7 achieving NDCs that set an emissions target that is below a specific base year, or to other targets for RE
 8 deployment, or sectoral emission levels. In such cases, users do not need to develop a baseline scenario
 9 or estimate baseline emissions.

10 Estimating an emission level, either ex-ante or ex-post, allows comparison against a target, as shown in
 11 Figure Figure 4.2. Here, an ex-ante estimate of emission levels out to 2020 shows that there is a gap and
 12 expected emission reductions in the sector are not on track to be met. The figure also shows an ex-post
 13 estimate of emission levels, estimated in 2017. Here, the emission level is higher than the target – in other
 14 words, the anticipated emission reductions have not been achieved. In both of these ex-ante and ex-post
 15 assessments a baseline is not used, nor needed.

16 *Figure 4.2: Use of GHG emission level in ex-ante and ex-post impact assessment*

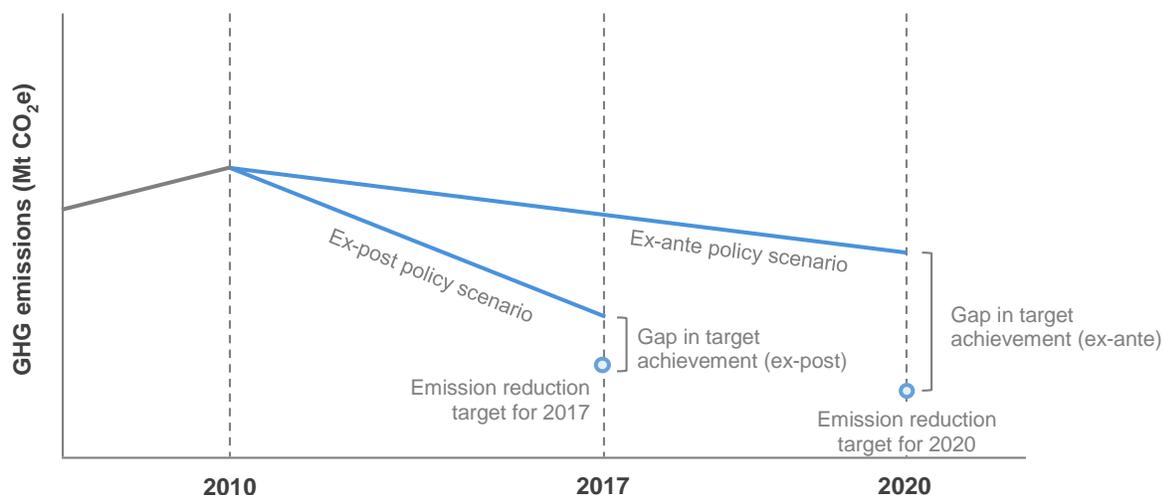


17

18 Estimating GHG emission reductions

19 Estimating emission reductions is relevant where the objective is to evaluate the GHG impact of a specific
 20 policy. This requires comparing policy scenario emissions to baseline scenario emissions. Figure 4.3
 21 illustrates the estimation of GHG emission reductions ex-ante and ex-post. The reductions are calculated
 22 by subtracting the ex-ante (or ex-post) policy scenario emissions from the ex-ante (or ex-post) baseline
 23 emissions. To estimate the ex-ante emission reductions, both the policy scenario emissions and baseline
 24 emissions are forecasted. To estimate the ex-post emission reductions, baseline emissions are estimated
 25 according to the most likely baseline scenario, while the policy scenario emissions are estimated based
 26 on observed data. The figure highlights that the ex-ante emission reductions estimate and the ex-post
 27 estimate can differ.

1 **Figure 4.3: Estimating GHG emission reductions with a baseline scenario**

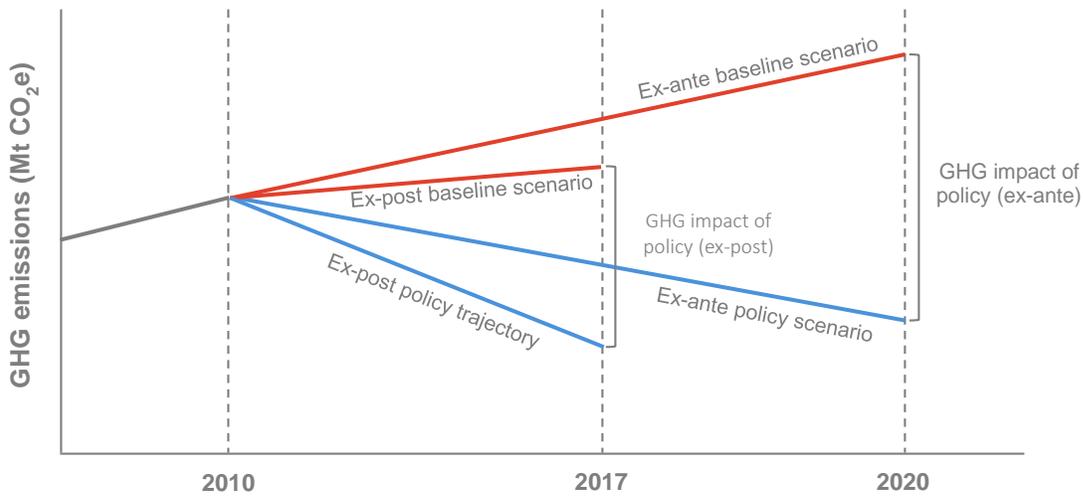

2


3 **Ex-ante and ex-post assessment steps**

4 The estimation of GHG impacts ex-ante is divided into two parts: estimating the RE addition of the policy
 5 (Chapter 7), then estimating the GHG impacts from this RE addition (Chapter 8). RE addition is the
 6 additional installation of renewable energy capacity or electricity generation from renewable sources
 7 realised via the policy, expressed in megawatts (MW) or megawatt-hours (MWh) respectively.

8 RE addition is estimated through a process of estimating the maximum implementation potential of the
 9 policy (the maximum resource potential of for the technology or the policy cap) and then following
 10 stepwise guidance to evaluate the policy design characteristics and other factors that affect the likelihood
 11 that the policy will achieve this maximum implementation policy (illustrated in Figure Figure 4.4). The
 12 result is the actual RE addition the policy is expected to achieve. Once the RE addition has been
 13 estimated, it can then be translated into a GHG emission level or GHG emissions reductions.

14 For an ex-post impact assessment, the first part of the assessment is to collect RE addition data from
 15 relevant agencies to determine the RE addition. The GHG impacts (emission level or emission
 16 reductions) are then estimated.

17 **Figure 4.4: Guidance steps for estimating RE addition of the policy ex-ante**

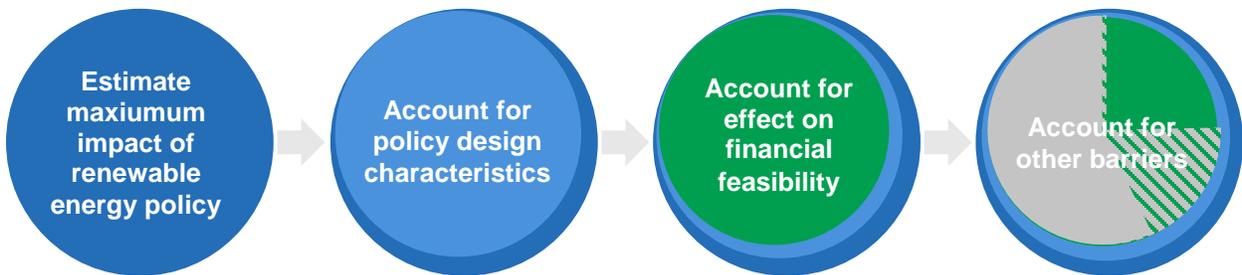

18

19 **4.1.3 Expert judgment**

20 Expert judgment is defined by the IPCC as a carefully considered, well-documented qualitative or
 21 quantitative judgment made in the absence of unequivocal observational evidence by a person or

1 persons who have a demonstrable expertise in the given field.⁸ The user can apply their own expert
2 judgment or consult experts.

3 When consulting experts, information can be obtained through methods that are known as expert
4 elicitation. The 2006 IPCC Guidelines for National Greenhouse Gas Inventories provides a procedure for
5 expert elicitation including a process for helping experts understand the elicitation process, avoiding
6 biases, and producing independent and reliable judgments.

7 Expert judgment can be associated with a high level of uncertainty. As such, experts can be consulted to
8 provide a range of possible values and the related uncertainty range or they can be consulted to help
9 select suitable values from a range of values. Expert judgment can be informed or supported through
10 broader consultations with stakeholders.

11 Assumptions or expert judgment will likely be required in order to complete the assessment where
12 information is not available to make a reasonable assumption about the value of a parameter. When
13 doing so, it is important to document the reason that no data sources are available and the rationale for
14 the value chosen. This could include applying proxy data, interpolating information, estimating a cap or
15 maximum implementation potential, evaluating a barrier to RE deployment, or other types of assumptions
16 or judgment.

17 4.1.4 Planning the assessment

18 Users should review this guidance and plan the steps, responsibilities and resources needed to meet
19 their objectives for the assessment in advance. The time and human resources required to implement the
20 guidance and carry out an impact assessment depend on a variety of factors, such as the complexity of
21 the policy being assessed, the extent of data collection needed and whether relevant data has already
22 been collected, and the desired level of accuracy and completeness needed to meet the stated objectives
23 of the assessment.

24 Planning stakeholder participation

25 Stakeholder participation is recommended in many steps throughout the guidance. It can strengthen the
26 impact assessment and the contribution of policies to GHG emission reduction goals in many ways,
27 including by:

- 28 • Providing a mechanism through which people who are likely to be affected by a given policy or
29 who can influence the policy are provided with an opportunity to raise issues and to have these
30 issues considered before, during and after the policy implementation
- 31 • Raising awareness and enabling better understanding of complex issues for all parties involved,
32 building their capacity to contribute effectively
- 33 • Building trust, collaboration, shared ownership and support for policies among stakeholder
34 groups, leading to less conflict and easier implementation

⁸ IPCC 2000.

- 1 • Addressing stakeholder perceptions of risks and impacts and helping to develop measures to
2 reduce negative impacts and enhance benefits for all stakeholder groups, including the most
3 vulnerable
- 4 • Enhancing the credibility, accuracy and comprehensiveness of the assessment, drawing on
5 diverse expert, local and traditional knowledge and practices, for example, to provide inputs on
6 data sources, methods and assumptions
- 7 • Enhancing transparency, accountability, legitimacy and respect for stakeholders' rights
- 8 • Enabling enhanced ambition and financing by strengthening the effectiveness of policies and
9 credibility of reporting

10 Various sections throughout this guidance explain where stakeholder participation is recommended—for
11 example, in identifying a complete list of GHG impacts (Chapter 6), identifying barriers to RE deployment
12 (Chapter 7), monitoring performance over time (Chapter 10), reporting (Chapter 11).

13 Before beginning the assessment process, consider how stakeholder participation can support the
14 objectives and include relevant activities and associated resources in their assessment plans. It may be
15 helpful to combine stakeholder participation for impact assessment with other participatory processes
16 involving similar stakeholders for the same or related policies, such as those being conducted for
17 assessment of sustainable development and transformational impacts, and for technical review.

18 It is important to ensure conformity with national legal requirements and norms for stakeholder
19 participation in public policies, as well as requirements of specific donors and of international treaties,
20 conventions and other instruments that the country is party to. These are likely to include requirements for
21 disclosure, impact assessments and consultations, and may include specific requirements for certain
22 stakeholder groups (e.g., UN Declaration of the Rights of Indigenous Peoples, International Labour
23 Organization Convention 169).

24 During the planning phase, it is recommended to identify stakeholder groups that may be affected by or
25 may influence the policy. Appropriate approaches should be identified to engage with the identified
26 stakeholder groups, including through their legitimate representatives. To facilitate effective stakeholder
27 participation, consider establishing a multi-stakeholder working group or advisory body consisting of
28 stakeholders and experts with relevant and diverse knowledge and experience. Such a group may advise
29 and potentially contribute to decision making to ensure that stakeholder interests are reflected in design,
30 implementation and assessment of policies.

31 Refer to the ICAT *Stakeholder Participation Guidance* for more information, such as how to plan effective
32 stakeholder participation (Chapter 4), identify and analyse different stakeholder groups (Chapter 5),
33 establish multi-stakeholder bodies (Chapter 6), provide information (Chapter 7), design and conduct
34 consultations (Chapter 8) and establish grievance redress mechanisms (Chapter 9). Appendix E
35 summarises the steps in this guidance where stakeholder participation is recommended along with
36 specific references to relevant guidance in the *Stakeholder Participation Guidance*.

37 Planning technical review (if relevant)

38 Before beginning the assessment process, consider whether technical review of the assessment report
39 will be pursued. The technical review process emphasises learning and continual improvement and can
40 help users identify areas for improving future impact assessments. Technical review can also provide

1 confidence that the impacts of policies have been estimated and reported according to ICAT key
 2 recommendations. Refer to the ICAT *Technical Review Guidance* for more information on the technical
 3 review process.

4 4.2 Assessment principles

5 Generally accepted principles are intended to underpin and guide the impact assessment process,
 6 especially where the guidance provides flexibility. It is a *key recommendation* to base the assessment on
 7 the principles of relevance, completeness, consistency, transparency and accuracy, as follows:

- 8 • **Relevance:** Ensure the GHG assessment appropriately reflects the GHG impacts of the policy
 9 and serves the decision-making needs of users and stakeholders—both internal and external to
 10 the reporting entity. Users should apply the principle of relevance when selecting the desired level
 11 of accuracy and completeness among a range of methodological options. Applying the principle
 12 of relevance depends on the objectives of the assessment. Due to the varied nature of users’
 13 objectives, it may be more relevant to estimate and report an intermediary impact, such as the RE
 14 addition expressed as installed capacity (MW) or generated electricity (MWh) achieved by the
 15 policy, rather than the GHG emissions reductions.
- 16 • **Completeness:** Include all significant GHG impacts and sources in the GHG assessment
 17 boundary. Disclose and justify any specific exclusions.
- 18 • **Consistency:** Use consistent accounting approaches, data collection methods, and calculation
 19 methods to allow for meaningful performance tracking over time. Transparently document any
 20 changes to the data, GHG assessment boundary, methods, or any other relevant factors in the
 21 time series.
- 22 • **Transparency:** Provide clear and complete information for internal and external reviewers to
 23 assess the credibility and reliability of the results. Disclose all relevant methods, data sources,
 24 calculations, assumptions, and uncertainties. Disclose the processes, procedures, and limitations
 25 of the GHG assessment in a clear, factual, neutral, and understandable manner through an audit
 26 trail with clear documentation. The information should be sufficient to enable a party external to
 27 the GHG assessment process to derive the same results if provided with the same source data,
 28 though the assessment of certain design characteristics and barriers in the guidance provided for
 29 ex-ante assessments is qualitative in nature, subjective to expert judgment, and may be difficult
 30 to reproduce. Chapter 11 provides a list of recommended information to report to ensure
 31 transparency.
- 32 • **Accuracy:** Ensure that the estimated change in GHG emissions and removals is systematically
 33 neither over nor under actual values, as far as can be judged, and that uncertainties are reduced
 34 as far as practicable. Achieve sufficient accuracy to enable users and stakeholders to make
 35 appropriate and informed decisions with reasonable confidence as to the integrity of the reported
 36 information. Accuracy should be pursued as far as possible, but once uncertainty can no longer
 37 be practically reduced, conservative estimates should be used. Box Box 4.1 provides guidance
 38 on conservativeness.

39 In addition to the principles above, users should follow the principle of comparability if it is relevant to the
 40 assessment objectives, for example if the objective is to compare multiple policies based on their GHG

1 impacts or to aggregate the results of multiple impact assessments and compare the collective impacts to
 2 national goals (discussed further in Box Box 4.2).

- 3 • **Comparability:** Ensure common methods, data sources, assumptions and reporting formats
 4 such that the estimated GHG impacts of multiple policies can be compared.

5 *Box 4.1: Conservativeness*

Conservative values and assumptions are those more likely to overestimate negative impacts or underestimate positive impacts resulting from a policy. Users should consider conservativeness in addition to accuracy when uncertainty can no longer be practically reduced, when a range of possible values or probabilities exists (e.g., when developing baseline scenarios), or when uncertainty is high.

Whether to use conservative estimates and how conservative to be depends on the objectives and the intended use of the results. For some objectives, accuracy should be prioritised over conservativeness in order to obtain unbiased results. The principle of relevance can help guide what approach to use and how conservative to be.

6 *Box 4.2: Applying the principle of comparability when comparing or aggregating results*

Users may want to compare the estimated impacts of multiple policies, for example to determine which has the greatest positive impacts. Valid comparisons require that assessments have followed a consistent methodology, for example regarding the assessment period, the types of impact categories, impacts, and indicators included in the GHG assessment boundary, baseline assumptions, calculation methods, and data sources. Users should exercise caution when comparing the results of multiple assessments, since differences in reported impacts may be a result of differences in methodology rather than real-world differences. To understand whether comparisons are valid, all methods, assumptions and data sources used should be transparently reported.

Comparability can be more easily achieved if a single person or organisation assesses and compares multiple policies using the same methodology. If the objective is to compare the results of unrelated assessments carried out independently, users should exercise caution in comparing the results, since differences in reported impacts may be a result of differences in methods.

Users may also want to aggregate the impacts of multiple policies, for example to compare the collective impact of multiple policies in relation to a national goal. Users should likewise exercise caution when aggregating the results if different methods have been used and if there are potential overlaps or interactions between the policies being aggregated. In such a case, the sum would either over or underestimate the impacts resulting from the combination of policies. For example, the combined impact of a local energy efficiency policy and a national energy efficiency policy in the same country is likely less than the sum of the impacts had they been implemented separately, since they affect the same activities. Chapter 4 provides more information on policy interactions.


7 In practice, users may encounter trade-offs between principles when developing an assessment. For
 8 example, a user may find that achieving the most complete assessment requires using less accurate data
 9 for a portion of the assessment, which could compromise overall accuracy. Users should balance trade-
 10 offs between principles depending on their objectives. Over time, as the accuracy and completeness of
 11 data increases, the trade-off between these principles will likely diminish.

PART II: DEFINING THE ASSESSMENT

5. DESCRIBING THE POLICY

This chapter provides guidance on describing the policy. In order to assess the GHG impacts of a policy, users need to describe the policy that will be assessed, decide whether to assess the individual policy or a package of related policies, and choose whether to carry out an ex-ante or ex-post assessment.

Figure 5.1: Overview of steps in the chapter

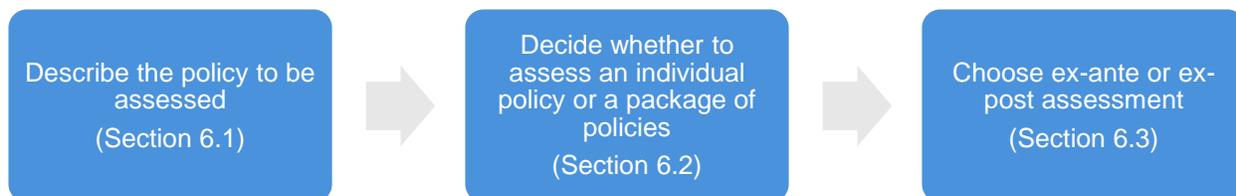

Checklist of key recommendations

- Clearly describe the policy (or package of policies) that is being assessed

5.1 Describe the policy to be assessed

In order to effectively carry out an impact assessment in subsequent chapters, it is necessary to have a detailed understanding of the policy being assessed. It is a *key recommendation* to clearly describe the policy, or package of policies, that is assessed. Table 5.1 provides a checklist of recommended information that should be included in a description to enable an effective assessment. Table 5.2 outlines additional information that may be relevant depending on the context.

Users that assess a package of policies should use these tables to either document the package as a whole or document each policy within the package separately. If assessing a package of policies, it may be easiest to do the first two steps in the chapter (Sections 5.1 and 5.2) together or iteratively. Users that are assessing the sustainable development and/or transformational impacts of the policy should describe the policy in the same way to ensure a consistent and integrated assessment.

Table 5.1: Checklist of recommended information to describe the policy being assessed

Information	Description	Example
Title of the policy or action	Policy name	Feed-in tariff without cap
Type of policy or action	The type of policy, such as those presented in Table 3.1	Feed-in tariff policy

Description of specific interventions	The specific intervention(s) carried out as part of the policy, such as the technologies, processes or practices implemented	<p>Policy characteristics:</p> <p><u>Tariff differentiation</u>: Higher tariffs for small-size projects and lower tariffs for large-scale projects (set to give rates of return between 5-8%)</p> <p><u>Eligibility</u>: The only technology eligible under the feed-in tariff is solar photovoltaic (PV)</p> <p><u>Utility role</u>: Government owned single buyer with guaranteed purchase up to the annual production quota</p> <p><u>Payment structure</u>: Premium-price policies</p> <p><u>Contract and payment duration</u>: Premium is offered over a project's entire lifetime</p> <p><u>Forecasting</u>: No forecasting requirements</p> <p><u>Grid access</u>: Grid priority for renewable energies</p> <p><u>Policy adjustments</u>: Only inflation adjustments over lifetime of feed-in tariff</p>
Status of policy	Whether the policy is planned, adopted or implemented	Implemented
Date of implementation	The date the policy comes into effect (not the date that any supporting legislation is enacted)	1 July 2016
Date of completion (if relevant)	If relevant, the date the policy ceases, such as the date a tax is no longer levied or the end date of an incentive policy with a limited duration (not the date that the policy no longer has an impact)	No end date has currently been set
Implementing entity or entities	The entity or entities that implement(s) the policy, including the role of various local, subnational, national, international or any other entities	Ministry of Energy/Energy Regulatory Commission
Objectives and intended impacts or benefits of the policy	The intended impact(s) or benefit(s) the policy intends to achieve (e.g., the purpose stated in the legislation or regulation)	To increase deployment of solar PV and increase energy security
Level of the policy	The level of implementation, such as national level, subnational level, city level, sector level or project level	National
Geographic coverage	The jurisdiction or geographic area where the policy is implemented or	Small least developed country

	enforced, which may be more limited than all the jurisdictions where the policy has an impact	
Sectors, targeted	Which sectors or subsectors are targeted	Energy supply, grid-connected solar PV
Greenhouse gases targeted	Which GHG the policy aims to control, which may be more limited than the set of GHG that the policy affects	CO ₂
Other related policies or actions	Other policies or actions that may interact with the policy assessed	Fossil fuel subsidies; tender policies; tax incentive policies

1 Table 5.2: Checklist of additional information that may be relevant to describe the policy being assessed

Information	Description	Example
Intended level of mitigation to be achieved and/or target level of other indicators	Target level of key indicators, if relevant	National Target: 15% share of PV or RE in electricity mix 20% sectoral emission reduction below base year Y Policy: The policy does not have a separate target but instead is designed in an open manner.
Title of establishing legislation, regulations, or other founding documents	The name(s) of legislation or regulations authorising or establishing the policy (or other founding documents if there is no legislative basis)	Energy Feed-in Law
Monitoring, reporting and verification procedures	References to any monitoring, reporting, and verification procedures associated with implementing the policy	A coordinating body will be formed to ensure continuous monitoring and create a monitoring plan. The power producer establishes QA and QC measures to control and manage data reading, recording, auditing and archiving all relevant data and documents. Monitoring data for net electricity generation at the plant level can be obtained from the periodic electricity meter records kept by the power producer and/or the electricity board or grid company. These may be cross-checked with invoices sent by power producers to the grid company.
Enforcement mechanisms	Any enforcement or compliance procedures, such as penalties for noncompliance	The feed-in tariff has enforcement mechanisms in place to ensure that the reported data (electricity generation) is correct.

Reference to relevant documents	Information to allow practitioners and other interested parties to access any guidance documents related to the policy (e.g., through websites)	Renewable Energy Sources Act
The broader context/significance of the policy	Broader context for understanding the policy	The policy will contribute to the national target of a 15% share of PV or RE in electricity mix, and the 20% sectoral emission reduction below base year 2005. The policy will reduce consumption of fossil fuels and contribute to energy security.
Outline of sustainable development impacts of the policy or action	Any anticipated sustainable development benefits other than GHG mitigation	Will lead to more construction jobs and greater energy security. Solar energy will also provide quick alternative power during severe climate changes that may occur (El Nino) Will lead to increased solar electricity generation in the country, contributing to energy security by displacing fossil energy source that require fuel imports.
Key stakeholders	Key stakeholder groups affected by the policy	<ul style="list-style-type: none"> • Departments or ministries of energy • Energy regulatory commissions • Energy planning offices • RE developers • Investors • Utilities • Consumers • Constituents impacted at installation sites
Other relevant information	Any other relevant information	

1 **5.2 Decide whether to assess an individual policy or a package of**
 2 **policies**

3 If multiple policies are being developed or implemented in the same timeframe, users can assess them
 4 either individually or as a package. When making this decision, users should consider the assessment
 5 objectives, feasibility of assessing impacts individually or as a package, scope and level of incentive, and
 6 the degree of interaction between the policies. Where interactions exist, there can be advantages and
 7 disadvantages to assessing policies individually or as a package.

8 **5.2.1 Types of policy interactions**

9 Policies interact if their total impact, when implemented together, differs from the sum of their individual
 10 impacts had been implemented separately. Policies that interact can be independent, overlapping,

1 reinforcing, or overlapping and reinforcing. Table Table 5.3 provides an overview of these four possible
 2 relationships between policies, and further information is available in the *Policy and Action Standard*. Box
 3 Box 5.1 discusses integrated energy planning.

4 *Table 5.3: Types of interactions between RE policies*

Type	Description
Independent	Multiple policies do not interact with each other. The combined impact of implementing the policies together is equal to the sum of their individual impacts of implementing them separately.
Overlapping	Multiple policies interact, and their combined impact is less than the sum of their individual impacts. This category includes policies that have identical or complementary goals as well as policies that have different or opposing goals.
Reinforcing	Multiple policies interact, and their combined impact is greater than the sum of their individual impacts of implementing them separately.
Overlapping and reinforcing	Multiple policies interact, and have both overlapping and reinforcing interactions. The combined impacts may be greater or less than the sum of the individual impacts of implementing them separately.

5 *Box 5.1: Integrated energy planning*

Some RE policies may be implemented as part of a suite of measures to meet broad energy policy objectives in integrated policy planning, which is periodically reviewed (e.g., decommissioning of fossil fuel plants coupled with phasing-out of nuclear and deployment of RE as an integrated policy). Where this is the case, the RE component may be implemented using a tender process with many periodic windows that set the cap based on how well the other elements of the integrated energy policy are performing (i.e., whether the decommissioning of fossil fuel plants is on schedule, or whether a nuclear phase-out programme is delayed or has altered its ambition due to pressure from environmental activists).

These considerations affect the potential for RE deployment over time and may require a periodic update of the ex-ante assessment.

6 5.2.2 Identification of relationships between policies

7 Where multiple RE policies exist, users should first consider their specific objectives and circumstances
 8 when deciding whether to assess an individual policy or a package of related policies. An approach is set
 9 out below to help with this decision.

10 Step 1: Undertake policy mapping exercise to assess type and degree of interactions 11 between policies

12 Characterise the type and degree of interaction between the policies under consideration. Assess the
 13 relationship between the policies and the degree of interaction (minor, moderate or major). The
 14 assessment can be based on published studies of similar combinations of policies or on expert judgment.

15 The general relationship between different RE policies in the energy supply sector depends largely on the
 16 country-specific context, as well as characteristics that are specific to each policy. The assessment will be
 17 qualitative since a quantitative assessment would require many of the steps needed for a full assessment.

1 Table Table 5.4 provides an example mapping of RE policies that target the same GHG emissions
 2 sources. In this example, users are shown how a feed-in tariff for biomass installations interacts with two
 3 other RE policies that target the same emissions source.

4 *Table 5.4: Example of mapping RE policies that target the same emissions sources*

Policy being assessed	Other RE policies targeting the same sources	Type of interaction (independent, overlapping, reinforcing, overlapping and reinforcing)	Degree of interaction (minor, moderate, major)
Feed-in-tariff policy, biomass installations eligible	Tender policy, offshore wind energy installations eligible	Independent	Minor
	Tax incentive policies for solar and biomass installations	Overlapping (and potentially reinforcing)	Moderate

5 Step 2: Undertake preliminary analysis to understand nature of interactions and
 6 determine whether to assess an individual policy or a package of policies

7 This analysis is high-level and qualitative, since detailed analysis of interactions is taken up in subsequent
 8 chapters. The criteria and questions in Table Table 5.5 can help users decide whether to assess an
 9 individual policy or a package of policies. The following should also be identified before addressing these
 10 criteria and questions:


- 11 • Eligibility: Identify whether the same types of RE installations or technologies are eligible under
 12 the policy being assessed and other RE policies identified
- 13 • Financial incentive level: Identify what kind of financial incentives the policy provides and whether
 14 these incentives are considerably stronger than those provided by other policies identified
- 15 • Additional incentives for GHG emissions reductions: Identify whether the policy provides
 16 incentives for additional GHG emissions reductions not covered by other policies identified

17 *Table 5.5: Criteria for determining whether to assess an individual policy or a package of policies*

Criteria	Questions	Guidance
Objectives and use of results	Do the end-users of the assessment results want to know the impact of individual policies, for example to inform choices regarding which individual policies to implement or continue supporting?	If “Yes”, undertake an individual assessment
Significant interactions	Are there significant (major or moderate) interactions between the identified policies, either overlapping or reinforcing, which will be missed if policies are assessed individually?	If “Yes”, consider assessing a package of policies
Scope and level of incentive	Does one policy clearly provide a stronger incentive than the others? Do the other policies spur additional emission reductions not already covered by the policies with stronger incentives? See the decision tree in Figure Figure 5.2 to assess overlap in incentives provided by different policies.	If “Yes”, consider focusing on the policy superseding the others in an individual

		assessment
Feasibility	Will the assessment be manageable if a package of policies is assessed? Is data available for assessing the package of policies? Are the policies implemented by a single entity?	If “No”, consider undertaking an individual assessment
	For ex-post assessments, is it possible to disaggregate the observed GHG impacts of interacting policies?	If “No”, consider assessing a package of policies

1 *Figure 5.2: Overlap in incentives provided by different RE policies*

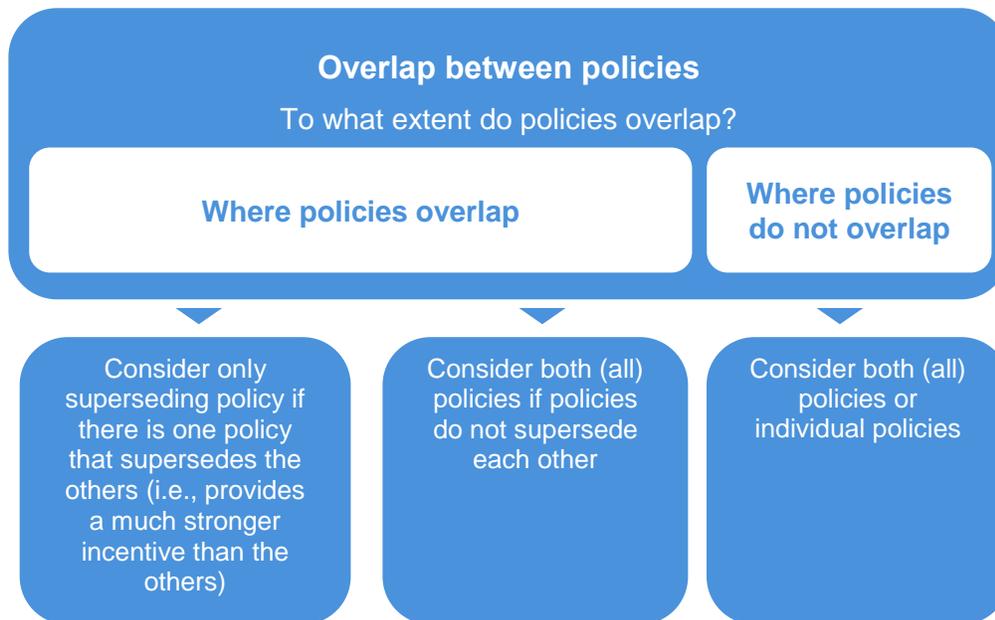

2

3 5.3 Choose ex-ante or ex-post assessment

4 Choosing between ex-ante or ex-post assessment depends on the status of the policy. If the policy is
 5 planned or adopted, but not yet implemented, the assessment will be ex-ante by definition. If the policy
 6 has been implemented, the assessment can be ex-ante, ex-post or a combination of the two. In this case,
 7 users would carry out an ex-post assessment if the objective is to estimate the impacts of the policy to
 8 date; an ex-ante assessment if the objective is to estimate the expected impacts in the future; or a
 9 combined ex-ante and ex-post assessment to estimate both the past and future impacts.

10

6. IDENTIFYING IMPACTS: HOW RE POLICIES REDUCE GHG EMISSIONS

This chapter provides examples of the most common GHG impacts of RE policies, and guidance for users to identify any additional impacts their policies may have. A subset of impacts that are considered significant is then taken from this list and included in the GHG assessment boundary. Guidance is also provided on defining the assessment period. The steps in this chapter are closely interrelated. Users can carry out the steps in sequence or in parallel, and the process may be iterative.

For most RE policies being assessed using this guidance, the sole relevant GHG impact is likely to be reduced emissions from existing and new fossil fuel power plants. For these policies, users can skip Section 6.1. For policies which may have other GHG impacts, such as emissions of CH₄ and CO₂ from water reservoirs, users should follow the guidance in Section 6.1 to ascertain the policy's GHG impacts.

Figure 6.1: Overview of steps in the chapter



Checklist of key recommendations

- Identify all potential GHG impacts of the policy and associated GHG source categories
- Develop a causal chain
- Include all significant GHG impacts in the GHG assessment boundary
- Define the assessment period

6.1 Identify GHG impacts

This section describes the main GHG impact of RE policies, which is reduced emissions from existing and new fossil fuel power plants, along with guidance for identifying GHG impacts for policies where significant impacts arise from other sources.

6.1.1 Identify intermediate effects

In order to identify the GHG impacts of the policy, it is useful to first consider how the policy is implemented by identifying the relevant inputs and activities associated with implementing the policy. Inputs are resources that go into implementing the policy, while activities are administrative activities involved in implementing the policy. These inputs and activities lead to intermediate effects, which are changes in behaviour, technology, processes or practices that result from the policy. These intermediate effects then lead to policy's GHG impacts (the reduction in emissions).

The identification of intermediate effects enables a complete and accurate assessment, and is necessary to identify the potential GHG impacts of the policy and develop a causal chain. In order to identify the

1 intermediate effects, users should identify the stakeholders, and the inputs and activities that are needed
 2 to implement the policy.

3 6.1.2 Identify potential GHG impacts

4 It is a *key recommendation* to identify all potential GHG impacts of the policy and associated GHG source
 5 categories. Guidance for this is provided below, and further discussion on the process is available in the
 6 *Policy and Action Standard*. There are several types of GHG impacts to consider, as described in Table
 7 Table 6.1.

8 *Table 6.1: Types of GHG impacts*

Type of GHG impact	Description	Example of GHG impact
Positive impact vs. negative impact	Impacts that cause decrease or increase in GHG emissions	<i>Positive:</i> Reduced GHG emissions from existing and new fossil fuel power plants <i>Negative:</i> Increased emissions from the manufacturing of RE based systems/equipment
Intended impact vs. unintended impact	Impacts that are both intentional and unintentional based on the original objectives of the policy	<i>Intended:</i> Reduced GHG emissions from fossil fuel power plants; reduced GHG emissions from national manufacturing of fossil fuel power plant equipment <i>Unintended:</i> Increased GHG emissions in other jurisdictions; increased GHG emissions from manufacturing of equipment for renewables
In-jurisdiction impact vs. out-of-jurisdiction impact	In-jurisdiction impacts are those that occur inside the geographic area over which the implementing entity has authority, such as a city boundary or national boundary. Out-of-jurisdiction impacts occur outside of the geopolitical boundary	<i>In-jurisdiction:</i> Increased GHG emissions from manufacturing of equipment for renewables <i>In-jurisdiction:</i> Reduced GHG emissions from local manufacturing of equipment for fossil fuel power plants <i>Out-of-jurisdiction:</i> Increased GHG emissions in other jurisdictions (e.g., from electricity generation)
Short-term impact vs. long-term impact	Impacts that are both nearer and more distant in time, based on the amount of time between implementation of the policy and the impact	<i>Short-term:</i> Reduced GHG emissions from operating fossil fuel power plants on the electricity grid <i>Long-term:</i> Reduced emissions from lower energy use due to increased cost of electricity

9 Users should consider the system-wide impacts some RE policies entail, including especially unintended
 10 impacts. System-wide impacts may exist for policies that support bioenergy and large hydro energy
 11 installations, which may either cause indirect land use change or material displacement impacts. Such
 12 impacts may result in unintended increasing emissions and thus should be taken into consideration. CDM

1 methodologies can help with the quantification of such impacts.⁹ For example, CDM methodology
 2 *ACM0002 Grid-connected electricity generation from renewable sources* includes a calculation method
 3 for quantifying CH₄ emissions from reservoirs.¹⁰

4 By separately identifying and categorising in-jurisdiction and out-of-jurisdiction impacts, users can more
 5 accurately link the GHG impacts to the relevant jurisdiction’s inventory, targets and goals. This separate
 6 categorisation also creates transparency around any potential double counting of out-of-jurisdiction
 7 impacts between jurisdictions. In some cases, a single impact may affect both in and out-of-jurisdiction
 8 emissions, and separate tracking may not be feasible.

9 Stakeholder consultation can help to ensure the completeness of the list of GHG impacts. Refer to the
 10 *ICAT Stakeholder Participation Guidance* (Chapter 8) for information on designing and conducting
 11 consultations. Relevant stakeholder may include departments or ministries of energy, energy regulatory
 12 commissions, energy planning offices, RE developers, investors, utilities, consumers, and those impacted
 13 at installation sites.

14 Users should identify all the GHG source categories associated with the GHG impacts of the policy.
 15 Example source categories are provided in Table Table 6.2. Source categories are the same for both RE
 16 projects and RE policies, so users with a project background should be familiar with all the main sources.

17 *Table 6.2: Example GHG sources for RE policies*

Source category	Description	Emitting entity or equipment	Relevant GHGs
Grid-connected electricity generation	CO ₂ emissions from electricity generation in fossil fuel fired power plants that are displaced due to the project activity	Grid-connected power plants	CO ₂
Water reservoirs of hydro power plants	CH ₄ and CO ₂ emissions from reservoirs	Decaying organic matter in reservoirs	CH ₄ , CO ₂
Fugitive emissions of geothermal power plants	Fugitive emissions of CH ₄ and CO ₂ from non-condensable gases contained in geothermal steam	Steam from power plant	CH ₄ , CO ₂


18 6.1.3 Develop a causal chain

19 It is a *key recommendation* to develop a causal chain. A causal chain is a conceptual diagram tracing the
 20 process by which the policy leads to GHG impacts through a series of interlinked and sequential stages of
 21 cause-and-effect relationships. Developing a causal chain can help identify intermediate effects and GHG
 22 impacts not previously identified. Figure Figure 6.2 shows an example causal chain for a policy. Causal
 23 chains will vary from policy to policy

⁹ Available at: <https://cdm.unfccc.int/methodologies/index.html>.

¹⁰ Available at: <https://cdm.unfccc.int/methodologies/DB/8W400U6E7LFHHYH2C4JR1RJWWO4PVN>.

- 1 Developing a causal chain allows users to understand visually how policies lead to changes in emissions.
- 2 Start by making a box for the policy, then build from there by adding linkages from the policy to the
- 3 identified intermediate effects and GHG impacts. The causal chain represents the flow of changes
- 4 expected to occur as a result of the policy. Causal chains can also include inputs and activities. The
- 5 *Policy and Action Standard* provides more information about developing causal chains.
- 6 Where users are also applying the ICAT *Sustainable Development Guidance*, the causal chain can be
- 7 used as a starting point for a causal chain mapping exercise that includes sustainable development
- 8 impacts as well as GHG impacts.
- 9 *Figure 6.2: Example causal chain for RE policies*

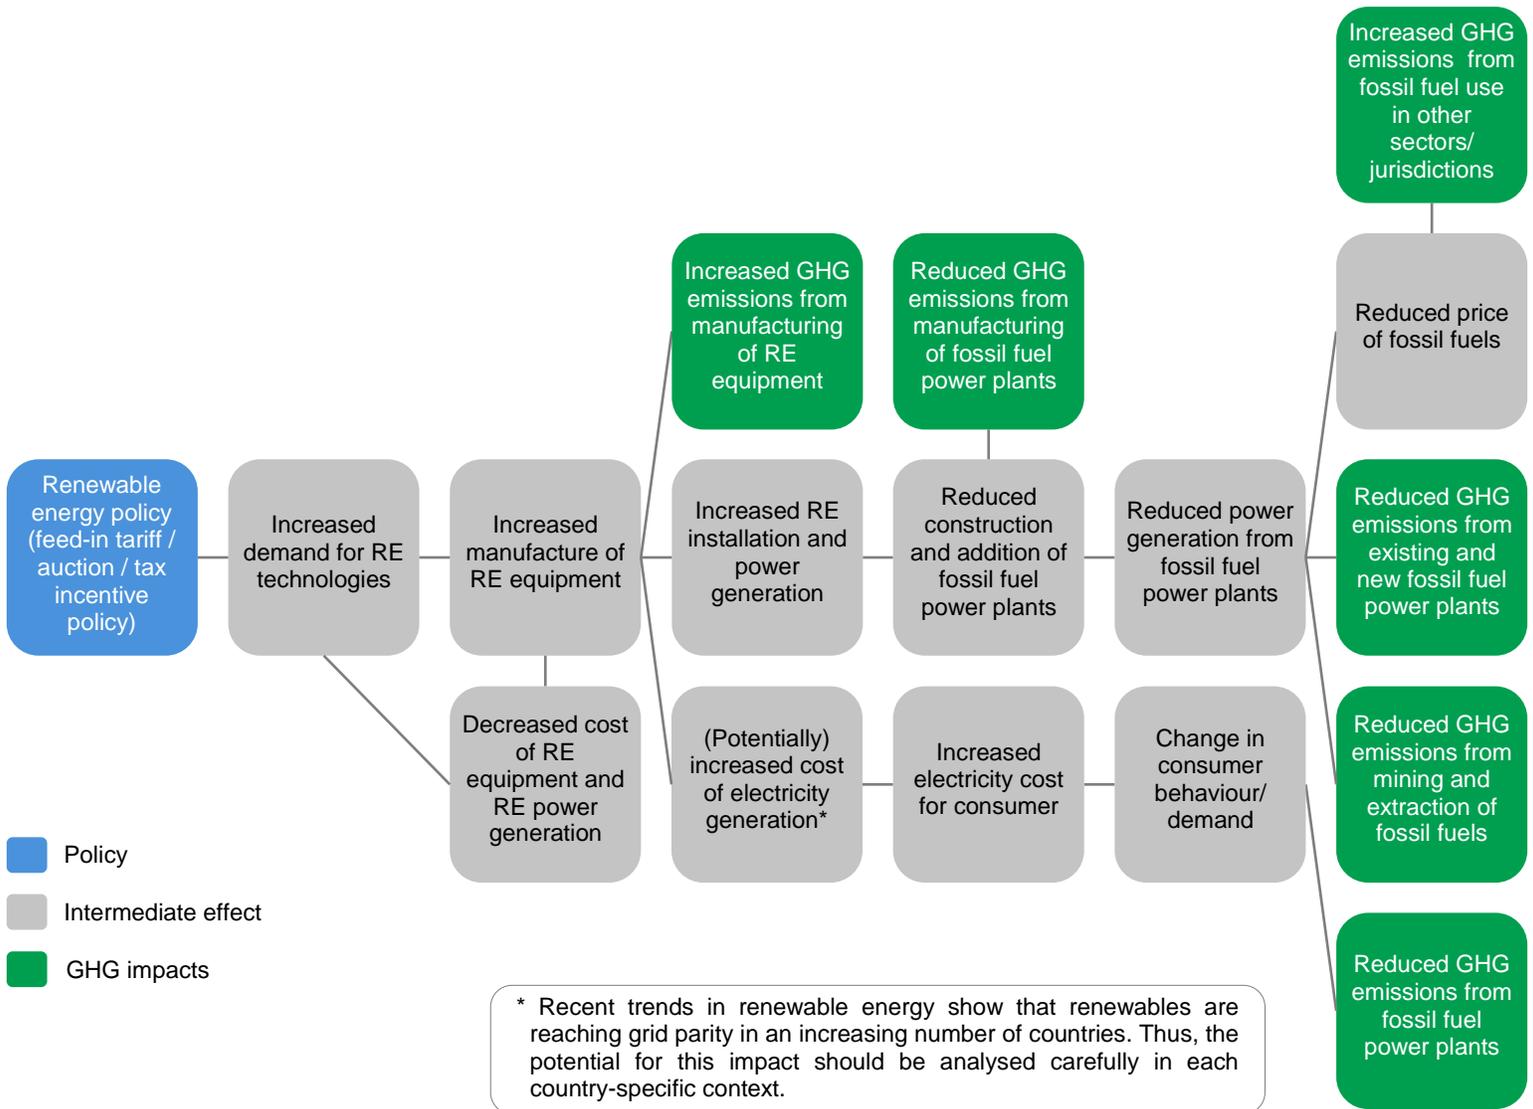

1 6.2 Define the GHG assessment boundary

2 The GHG assessment boundary defines the scope of the assessment in terms of the range of GHG
3 impacts that are included in the policy assessment. It is a *key recommendation* to include all significant
4 GHG impacts in the GHG assessment boundary.

5 For most RE policies there is only one relevant GHG impact – *reduced GHG emissions from existing and*
6 *new fossil fuel power plants*. This is because for most RE policies it is the only GHG impact that is
7 categorised as both *very likely* and of *major* magnitude. Table Table 6.3 lists other GHG impacts and
8 users should check the list to ensure that each of the GHG impacts is categorised appropriately for the
9 given policy and therefore does not need to be included in the GHG assessment boundary. Any GHG
10 impacts that are categorised as moderate or major in magnitude and very likely, likely or possible in
11 likelihood should be included in the GHG assessment boundary. The *Policy and Action Standard* provides
12 further information about categorising GHG impacts.

13 For users that followed Section 6.1, the identified GHG impacts and the associated GHG source
14 categories should be categorised for magnitude and likelihood, and included in the GHG assessment
15 boundary if categorised as moderate or major in magnitude and very likely, likely or possible in likelihood.

16 *Table 6.3: Example GHG impacts included/excluded in the GHG assessment boundary*

GHG impact	GHG	Likelihood	Relative magnitude	Included?	Explanation
Reduced GHG emissions from existing and new fossil fuel power plants	CO ₂	Very Likely	Major	Included	The main GHG impact of RE policies
Reduced emissions from mining of fossil fuels	CH ₄	Possible	Minor	Excluded	Considered insignificant for most RE policies, and is conservative to exclude
Increased emissions from the manufacturing of RE equipment	CO ₂ , CH ₄ , N ₂ O	Possible	Minor	Excluded	Considered insignificant for most RE policies and is offset by decreased emissions from construction of fossil fuel power plants
Reduced emissions from construction of fossil fuel power plants	CO ₂ , CH ₄ , N ₂ O	Possible	Minor	Excluded	Considered insignificant for most RE policies, plus see above
Leakage emissions to other jurisdictions	CO ₂ , CH ₄ , N ₂ O	Possible	Minor	Excluded	Considered insignificant for most RE policies
Reduced emissions from lower energy use due to increased cost of electricity	CO ₂ , CH ₄ , N ₂ O	Possible	Minor	Excluded	Considered insignificant for most RE policies
For geothermal power plants, fugitive emissions of CH ₄ and CO ₂	CH ₄ , CO ₂	Possible	Moderate	Policy dependent	Significant for RE policies involving geothermal power

For hydro power plants, emissions of CH ₄ and CO ₂ from water reservoirs	CH ₄ , CO ₂	Possible	Moderate	Policy dependent	Significant for RE policies involving hydro power plants with reservoirs
--	-----------------------------------	----------	----------	------------------	--

6.3 Define the assessment period

The assessment period is the time period over which GHG impacts resulting from the policy are assessed. It is *key recommendation* to define the assessment period.

For ex-ante assessments, the assessment period is usually determined by the longest-term impact included in the GHG assessment boundary. The assessment period can be longer than the policy implementation period, and should be as comprehensive as possible to capture the full range of significant impacts based on when they are expected to occur.

For an ex-post assessment, the assessment period can be the period between the date the policy is implemented and the date of the assessment or it can be a shorter period between those two dates. The assessment period for a combined ex-ante and ex-post assessment should consist of both an ex-ante assessment period and an ex-post assessment period.

In addition, users can separately estimate and report impacts over any other time periods that are relevant. For example, if the assessment period is 2020–2040, a user can separately estimate and report impacts over the periods 2020–2030, 2031–2040, and 2020–2040.

Where possible, users should align the assessment period with other assessments being conducted using ICAT guidance. For example, where users are assessing sustainable development impacts using the ICAT *Sustainable Development Guidance* in addition to assessing GHG impacts, the assessment period should be the same for both the sustainable development and GHG impact assessment.

6.4 Identify sustainable development impacts (if relevant)

RE policies have other sustainable development impacts in addition to their GHG impacts. Sustainable development impacts are changes in environmental, social or economic conditions that result from a policy or action, such as changes in economic activity, employment, public health, air quality and energy security. Table 6.4 identifies examples of sustainable development impacts associated with RE policies. Users can refer to the ICAT *Sustainable Development Guidance* if they want to conduct a full assessment of sustainable development impacts of their policy. This guidance in turn uses the ICAT *Stakeholder Participation Guidance*, since involving stakeholders is a recommended way of identifying sustainable development impacts.

Table 6.4: Example sustainable development impacts of RE policies

Dimension	Impact category	Examples of specific impacts
Environmental	Air quality / human health impacts of air pollution	Reduced particulate emissions from fossil fuel generation
Social	Access to clean, affordable, and reliable energy	Increased access to electricity due to cheaper RE power for self-consumption, especially for remote areas
	Capacity, skills, and knowledge development	Increased training for skilled workers in RE sectors

Economic	Jobs	Increased jobs for RE installation, operations maintenance sectors
	New business opportunities	Increased business opportunities for RE manufacturing, mining, transportation, solar power plants and grid associated technologies
	Energy security	Increased energy security from less import of fossil fuel (e.g., oil and gas)

1


2

PART III: ASSESSING IMPACTS

7. ESTIMATING RE ADDITION OF THE POLICY EX-ANTE

This chapter provides guidance for the first step of ex-ante impact assessment - estimating the RE addition that the policy can be expected to achieve. RE addition represents the policy scenario and refers to the additional installation of renewable energy capacity or electricity generation from renewable sources realised via the policy, expressed in megawatts (MW) or megawatt-hours (MWh) respectively. The expected RE addition depends on a number of factors, which are accounted for in this chapter.

Figure 7.1: Overview of steps in the chapter

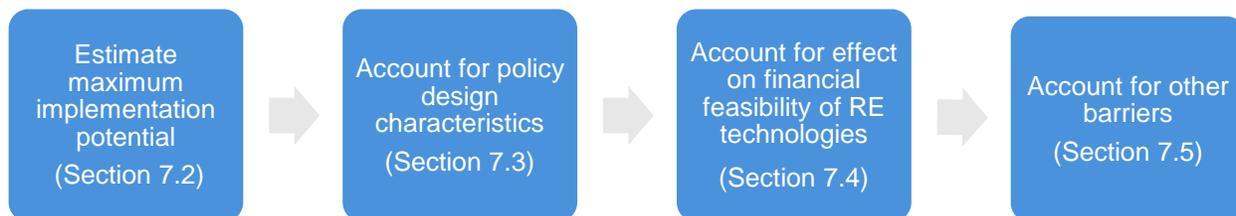

Checklist of key recommendations

- Estimate the maximum implementation potential of the policy
- Identify policy design characteristics and account for their effect on the maximum implementation potential of the policy
- Identify factors that affect the financial feasibility of RE technologies and account for their effect on the implementation potential of the policy
- Identify other barriers not addressed by the policy, and to account for their effect on the implementation potential of the policy

7.1 Introduction to estimating RE addition

The first step of estimating the RE addition of the policy is to estimate the maximum implementation potential of the policy. In the second step, users account for policy design characteristics that influence the maximum implementation potential, such as the scope of eligibility, differentiation between technologies, payment structure, longevity of financial support, and complexity of regulatory and legal procedures. The third step asks users to identify factors that affect the financial feasibility of RE technologies, account for their effect on the implementation potential (including accounting for alternative cost considerations, other policies in the sector and sector trends). Lastly, users identify other barriers that are not addressed by the policy and account for their effect on the implementation potential.

Upon completion of these steps, users obtain the RE addition estimate. At this stage, they may wish to conduct a plausibility check by undertaking a benchmarking exercise. Because similar policies in similar countries often yield similar results, countries can compare their RE addition estimates with results from similar countries to ascertain whether the estimated RE addition seems reasonable. Where this benchmarking exercise shows significant discrepancies (between the estimated RE addition and results

1 from other countries and policies) that cannot be easily explained, users should revisit the inputs and
 2 method used to estimate the RE addition in an effort to refine the estimated RE addition.

3 Appendix Appendix C: Example RE Policies provides five country examples for each of the three types of
 4 policies covered by this guidance. These are examples only and users should use other peer country
 5 case studies that serve as appropriate benchmarks for their country context and specific policies.

6 7.2 Estimate maximum implementation potential

7 The maximum implementation potential refers to the maximum achievable RE addition. Estimating this is
 8 the first step of ex-ante impact assessment, and it is a *key recommendation* to estimate the maximum
 9 implementation potential of the policy.

10 The maximum implementation potential can be either the policy cap inherent in the policy itself, or an RE
 11 target that is separate from the policy. Alternatively, where there is no cap associated with the policy or
 12 with a separate RE target, users estimate the maximum implementation potential using available studies
 13 or data on RE resource potential.

14 7.2.1 Estimating maximum implementation potential where there is a policy cap

15 A policy cap is the maximum quantity of installed capacity or electricity generation supported by the
 16 policy. For feed-in tariff policies, it is an increasingly common practice to set a cap, either at a maximum
 17 per year or over the lifetime of the policy. Policy caps are implicit in the design of auctions and tenders, as
 18 a certain quantity is tendered which serves as the cap on either the number of installations, MW installed
 19 or electricity generated.

20 Where the policy has a policy cap, this cap should be taken as the maximum implementation potential,
 21 noting that there are a number of cases where the policy cap may not serve well as the maximum
 22 implementation potential:

- 23 • The policy cap is indicative and non-binding, in which case it would serve the same purpose as a
 24 RE target.
- 25 • The policy cap is binding, but the policy still runs the risk of exceeding its objective if the
 26 government decides to revise it. For example, a government may decide to set an artificially low
 27 cap in the beginning when experience with the technology is lacking or where the government
 28 has decided against further deployment. As the technology penetration grows, acceptance and
 29 trust may increase, leading the government to revise the policy cap upwards.
- 30 • The timeframe associated with the policy cap does not match the assessment period. For
 31 example, a cap may only cover the first 5 years while the assessment considers impacts over a
 32 15-year timeframe.

33 In these situations, users should evaluate how the policy cap relates to the general potential for RE
 34 deployment in the sector. Where the potential is much larger than the policy cap, users should consider
 35 following the approach for cases where there is no policy cap if this seems likely to produce a more
 36 realistic value for the maximum implementation potential.

37 Where the timeframe of the cap does not match the timeframe of the impact assessment, it may be
 38 necessary for users to make assumptions about the deployment of the technology after the last cap year.
 39 There are two approaches users can follow:

1 • Assume that the RE addition does not change after the last year of the cap. Users should assume
2 the policy will be discontinued and that there are no other trends driving the deployment of the
3 technology in the country.

4 • Assume that the RE addition continues to increase at the same rate as it did during the timeframe
5 of the cap. Users should assume that the policy will be continued at the same level.

6 Separate assumptions can be made about an even faster uptake of the technology after the end of the
7 cap where there is sufficient evidence for this trend.

8 The example in Box 7.1 shows how the maximum implementation potential is estimated for a tender
9 policy with three different rounds of scheduled tenders.

10 *Box 7.1: Estimating maximum implementation potential for an example tender policy with a policy cap*

The tender policy is administered by a public authority that has set up three different rounds of tenders for increasing quantities of installed capacity, which will be implemented in three consecutive years. Developers will submit bids for these three tenders, and a number of winners will be selected to construct the total amount of installed capacity tendered for that year.

The following quantities of RE are scheduled to be tendered:

- 2017: 40 MW of RE
- 2018: 100 MW of RE
- 2019: 500 MW of RE

The assessment period is 2017 to 2025. The quantities above may therefore be used as the maximum implementation potential up to 2019. The user assumes that 640 MW will be installed by then. The user may choose to assume that the tender policy is discontinued after 2019, since there is not a strong history of continuity in policymaking. There is no evidence of other trends driving the development of the technology in the country, and there is political opposition to RE deployment. Therefore, 640 MW is estimated to be the maximum implementation potential.

11 **7.2.2 Estimating maximum implementation potential where there is no policy cap**

12 Where the policy does not define a policy cap, the maximum implementation potential should be
13 estimated using available studies or data on RE resource potential. For example, users may estimate a
14 maximum implementation potential based on a study that estimates the deployment potential for a
15 particular technology in a region or country during a specific timeframe, or they may use a policy cap from
16 a similar policy to the one being assessed. Users should begin with the following list of studies, prioritised
17 from top to bottom. Preference should be given to the quality of the study over its relevance to national
18 circumstances:

- 19 • National and technology-specific studies on RE resource potential

- 1 ○ Example resource: International Renewable Energy Agency (IRENA) *Studies on*
- 2 ○ *Renewable Energy Potential*¹¹, which provides an overview of studies available by
- 3 ○ country or technology
- 4 • Global studies and databases on RE resource potential
- 5 ○ Example resource: *IRENA Global Atlas for Renewable Energy*¹², which is an initiative
- 6 ○ coordinated by IRENA to close the gap between nations with and without access to
- 7 ○ necessary datasets, expertise and financial support to evaluate their national renewable
- 8 ○ energy potentials
- 9 • Expert judgment-based assessments
- 10 ○ Example: Experts with ample experience in the national energy sector (e.g., in-house
- 11 ○ experts in ministries, research groups at national universities or other research
- 12 ○ organisations, or local consultants) might have a good understanding of the maximum
- 13 ○ renewable energy potential in the country. Such expert judgments might be based on
- 14 ○ country-specific models used by the experts' previous analysis and other projects or
- 15 ○ studies, or might just be informed by their long standing experience of working in the
- 16 ○ sector in the country.

17 Users should account for the following factors when estimating the maximum implementation potential,
 18 prioritising them from top to bottom and recognising that construction of RE capacity (and therefore
 19 realisation of RE potential) takes time:

- 20 • **Resource factors** related to the availability of natural resources available for RE extraction,
 21 including the following:
 - 22 ○ Physical constraints: Physical characteristics that determine or constrain the overall
 23 potential for RE extraction, such as total sun hours in a country or region
 - 24 ○ Energy content of resource: Energy content that can theoretically be converted into
 25 electricity, such as wind intensity profile or solar radiation intensity
 - 26 ○ Theoretical physical potential: Maximum potential of RE extraction depending on the
 27 physical characteristics and energy content of the resource
- 28 • **Technical factors** relate to the geographical location of potential RE extraction, the energy
 29 system, the grid load location, and land use constraints that may impact the installation of RE
 30 equipment, permitting, stakeholder acceptance or available land area, including the following:
 - 31 ○ System and topographic constraints: Constraints that affect the realisation of RE
 32 extraction due to the topography (e.g., high mountains that inhibit the construction of
 33 solar or wind installations, or proximity to coast lines likely indicating a larger resource
 34 potential for wind installations)

¹¹ Available at: http://www.irena.org/potential_studies/index.aspx.

¹² Available at: <http://irena.masdar.ac.ae/>.

- 1 ○ Land-use constraints: Constraints that affect the realisation of RE extraction due to land
- 2 requirements for agriculture, housing and other infrastructure
- 3 ○ System performance constraints: Constraints that affect the realisation of RE extraction
- 4 due to structural limitations of the energy system (e.g., non-existence or weak grid
- 5 infrastructure in a certain region may limit what can be done in the region in a short to
- 6 medium time frame or after the infrastructure has been built)

7 Construction of RE capacity, and therefore realisation of RE resource potential, takes time. Users should
 8 estimate maximum implementation potential accounting for the time it takes to install RE capacity and
 9 how much capacity it is practical to install within the relevant timeframe. “Practical to install” here means
 10 the RE capacity that could be constructed assuming no constraints imposed by policy design
 11 characteristic, economic and financial factors, and other barrier. The impact of these is addressed
 12 following the subsequent steps.

13 Box Box 7.2 provides an example estimate of the maximum implementation potential for a feed-in tariff
 14 policy without a policy cap.

15 *Box 7.2: Example of estimating maximum implementation potential for a feed-in tariff policy without a*
 16 *policy cap*

The country has no available studies citing capped feed-in tariff policies that can be used, and global assessments do not contain sufficient detail to allow the estimation of the maximum implementation potential. However, a national university with expertise and a progressive energy department previously produced estimates for the maximum RE resource potential in the country which they have been updating on a yearly basis for their own research purposes. The insights gained through this analysis provides a good understanding of the country’s resource potential, based on resource and technical factors. For this reason, the university experts’ knowledge is deemed sufficiently good to be used as a basis for the estimation of the maximum implementation potential of the feed-in tariff policy. In a workshop session, the university experts transparently explain their estimates on the RE resource potential and underlying assumptions on all resource and technical factors to ministry representatives and both groups jointly arrive at a conclusion. The maximum implementation potential of the feed-in tariff policy is as follows:

- Solar energy: 1,500 MW
- Wind energy: 800 MW

The experts further analyse capacity and determine that it is practical to install the following, by 2030:

- Solar energy: 900 MW
- Wind Energy: 400 MW

Therefore, the feed-in tariff policy’s maximum implementation potential is determined to be 1,300 MW.

17 7.3 Account for policy design characteristics

18 There are several design characteristics common to RE policies that influence their impact, such as the
 19 scope of eligibility, differentiation between technologies, payment structure, longevity of financial support,

1 and complexity of regulatory and legal procedures. It is a *key recommendation* to identify policy design
 2 characteristics and account for their effect on the maximum implementation potential of the policy.

3 The tables in the sections below list the main design characteristics for the different types of RE policies
 4 and describe how each influences the maximum implementation potential. Each section also provides a
 5 box with an illustrative example of how these policy design characteristics are used to refine the
 6 implementation potential of the policy.

7 Users should identify the design characteristics of the policy that are likely to influence the maximum
 8 implementation potential using Tables Table 7.1, Table 7.2 and Table 7.3 as a guide. The tables identify
 9 the main design characteristics but are not exhaustive and there may be other characteristics relevant to
 10 the policy. The tables describe the influence each design characteristic can have on maximum
 11 implementation potential. These are indicative in nature and will vary with country context.

12 Users should then describe how the identified policy design characteristics are expected to influence RE
 13 deployment, and estimate the overall influence of these characteristics on the maximum implementation
 14 potential of the policy.

15 **7.3.1 Design characteristics of feed-in tariff policies**

16 *Table 7.1: Feed-in tariff policies - Influence of policy design characteristics on maximum implementation*
 17 *potential*

Design characteristic	Description	Influence on maximum implementation potential
Eligibility	<ul style="list-style-type: none"> • Project owner • Technology • Size • Location 	<ul style="list-style-type: none"> • The narrower the eligibility conditions of the feed-in tariff policy, the lower the probability that the policy achieves its maximum implementation potential
Tariff Differentiation	<ul style="list-style-type: none"> • RE type • Project size • Resource quality • Technology application • Ownership type • Geography • Local content 	<ul style="list-style-type: none"> • Differentiated tariffs are able to tap into a larger share of the GHG emission reduction potential; lower tariffs for less expensive RE technologies may lower the probability that the policy achieves its maximum implementation potential
Payment structure	<ul style="list-style-type: none"> • Fixed-price or premium-price policies 	<ul style="list-style-type: none"> • For both types of payment structures, if the resulting end price is above the levelised cost of electricity (LCOE) or other feasibility calculations done by project developers, this should not reduce the probability that the policy achieves its maximum implementation potential
Utility's role	<ul style="list-style-type: none"> • Purchase obligation • Guaranteed grid 	<ul style="list-style-type: none"> • The lack of purchase obligation or guaranteed grid connection may lower the probability that the policy achieves its maximum implementation potential due

	connection	to decreased security and certainty for investors
Contract and payment duration	<ul style="list-style-type: none"> Contract periods (short-term, medium-term, long-term) 	<ul style="list-style-type: none"> Shorter contract and payment durations likely lower the probability that the policy achieves its maximum implementation potential due to a lack of security and certainty for investors
Forecasting	<ul style="list-style-type: none"> Forecast obligation 	<ul style="list-style-type: none"> Forecasting obligations require RE producers to provide hourly predictions of power production in order to participate in the market, for which the actual production under the estimated forecast is charged the highest price on the market for the non-produced amount of energy. This presumably has a small effect on the likelihood that the policy achieves its maximum implementation potential, but may slightly increase project costs
Grid access	<ul style="list-style-type: none"> Transmission Interconnection 	<ul style="list-style-type: none"> A lack of grid priority for RE electricity presumably lowers the probability that the policy achieves its maximum implementation potential due to decreased security and certainty for investors
Policy adjustments	<ul style="list-style-type: none"> Payment adjustments (fixed adjustments, regular adjustments, inflation adjustments) Programme adjustments 	<ul style="list-style-type: none"> Downward adjustment of feed-in tariff prices or premiums may decrease the probability that the policy achieves its maximum implementation potential if done ineffectively, and may also lead to resistance

1 Source: Adapted from Couture et al. 2010; UNEP 2012; UNESCAP 2012; NREL 2009.

2 Box 7.3: Feed-in tariff policy - Example of using policy design characteristics to refine maximum
3 implementation potential

The design characteristics for the feed-in tariff are as follows:

- **Eligibility:** The only technology eligible under the feed-in tariff is solar PV
- **Tariff differentiation:** Higher tariffs for small-size projects and lower tariffs for large-scale projects (set to give rates of return between 5-8%)
- **Payment structure:** Premium-price policies
- **Utility role:** Government-owned single buyer with guaranteed purchase
- **Contract and payment duration:** Premium is offered over period of 15 years
- **Forecasting:** No forecasting requirements
- **Grid access:** Grid priority transmission and dispatch for renewable energies
- **Policy adjustments:** Only inflation adjustments over lifetime of feed-in tariff

Due to a lack of specific quantification methods, a qualitative approach is used to estimate the influence of each of design characteristics above on the maximum implementation potential of the policy.

The analysis reveals that the policy design characteristics reduce the maximum implementation potential as follows:

1. The **scope of eligibility** is expected to directly reduce the maximum implementation potential since only solar PV installations are eligible. The maximum implementation potential is reduced from 1,300 MW to 900 MW, thus excluding all potential identified for wind energy.
2. The **premium-price policy** is expected to reduce the maximum implementation potential as the partial dependence on the electricity market price introduces a level of uncertainty that would not be there if the entire feed-in price was fixed. Based on a representative survey conducted by a local consultancy among potential project developers and investors (both small- and large-scale) on how this uncertainty might affect future RE deployment, the local consultants estimate that this reduces the maximum implementation potential by only about 60 MW (conservative estimate) as most developers have found ways to deal with this uncertainty (e.g., through integrating them into the rest of their portfolio). This reduces the maximum implementation potential to 840 MW.
3. The **contract and payment duration** of 15 years is expected to be too short for several of the large-scale solar PV projects, because with the expected interest rate developers would require contracts with payment duration of 20 to 25 years. A consultation with two local experts on renewable energy investments that includes a look at the projects currently in the pipeline in the country reveals that, under these conditions, about 6% of the projects in the pipeline would not be built (3 projects in total). This means that the maximum implementation potential would be further reduced by another 40 MW (conservative estimate) to 800 MW.

After accounting for all policy design characteristics, the refined implementation potential is expected to be **800 MW** (compared to 1,300 MW before).

1 7.3.2 Design characteristics of auction policies

2 *Table 7.2: Auction policies - Influence of policy design characteristics on maximum implementation*
 3 *potential*

Design characteristic	Description	Influence on maximum implementation potential
Auction demand and auction design	<ul style="list-style-type: none"> • Choice of the volume auctioned and differentiation between different technologies and project sizes (technology-neutral auctions or technology-specific auctions and standalone or systematic auctioning policies) 	<ul style="list-style-type: none"> • The size of the volume auctioned directly affects the size of the maximum implementation potential • Sub-optimal auction design and/or incomplete pre-analysis on conditions for successful tendering may affect auction's effectiveness and decrease the likelihood that the policy will achieve its maximum implementation potential
Longevity of the power purchase agreement (PPA)	<ul style="list-style-type: none"> • PPA signed with the preferred bidder • Contract provides the renewable RE project developers with fixed price 	<ul style="list-style-type: none"> • Without the provision of longevity annuities, which safeguard against risks for RE project developers and investors and lower the costs of financing, there is a reduced likelihood that the maximum implementation potential will be

	for certain number of years and guaranteed purchase for all generation	achieved
Qualification requirements	<ul style="list-style-type: none"> • RE project developers eligible to participate in the auction and requirements related to reputation • Equipment and production site selection • Securing grid access • Instruments to promote local socio-economic development 	<ul style="list-style-type: none"> • A lack of qualification criteria for bidders may decrease the likelihood that expected capacity is successfully installed and that the maximum implementation potential is achieved • High and costly qualification requirements may exclude small-scale or new project developers since such potential bidders may lack required resources; this may decrease the likelihood that the maximum implementation potential is achieved • Identification of sites that lack ideal resources and secured grid connection potentially increases risks to investors, thus decreasing the likelihood that maximum implementation potential is achieved
Winner selection process	<ul style="list-style-type: none"> • Bidding procedure • Requirements of minimal competition • Winner selection criteria • Clearing mechanism and marginal bids • Payment to the auction winner 	<ul style="list-style-type: none"> • Competitive bidding (in seal-bid or descending clock auction) can lead to underbidding due to incentive for bidders to bid as low as possible in order to increase chances of securing a contract, which may decrease the likelihood that the maximum implementation potential is achieved • Experience suggests that underbidding is widespread and contract failure rates remain high, leading to slower growth
Sellers' contractual liability requirements	<ul style="list-style-type: none"> • Commitments to contract signing • Contract schedule • Remuneration profile and financial risks • Nature of the quantity liabilities • Settlement rules and underperformance penalties • Delay and underbuilding penalties 	<ul style="list-style-type: none"> • High overall liabilities requirements may deter potential bidders, possibly decreasing the likelihood that the maximum implementation potential is achieved • The less predictable and stable the institutional and regulatory framework, the higher the bidders' perceived risk in the auctioning process and the lower the probability that the maximum implementation potential is achieved • The lack of sellers' liabilities requirements provides an incentive for drastic underbidding, lowering the probability that the maximum implementation potential is achieved

1 Source: Adapted from IRENA 2015a; IRENA 2013; Agora Energiewende 2014.

1

2 *Box 7.4: Auction policy - Example of using policy design characteristics to refine maximum*
 3 *implementation potential*

The design characteristics for the auction policy are:

- **Auction demand/auction design:** Technology-specific standalone auctions
 - 2017: 20 MW of solar, 20 MW of wind
 - 2018: 50 MW of solar, 30 MW of wind, 20 MW of biomass
 - 2019: 200 MW of solar, 250 MW of wind, 50 MW of biomass
- **Longevity of the PPA:** Duration of tariff is 25 years for solar, 20 years for wind and 20 years for biomass
- **Qualification requirements:** Pre-qualification phase with requirements to display experience, as well as financial and technical capacity to implement projects
- **Winner selection process:** One-round winner selection based on price and quota of energy (with no ceiling price)
- **Sellers' liabilities requirements:** Penalties for delay and underperformance determined in PPA, guarantee paid at signature of PPA, termination of PPA as last resort

Due to a lack of specific quantification methods, a qualitative approach is used to estimate the influence of each of policy design characteristics above on the maximum implementation potential of the policy.

The analysis reveals that the policy design characteristics reduce the maximum implementation potential as follows:

1. The **pre-defined qualification requirements** are likely to directly reduce the maximum implementation potential. A consultation with the above mentioned industry experts in the country reveals that there are a limited number of companies that have sufficient financial and technical capacity to implement projects. These qualification requirements were introduced to ensure the successful implementation of the auctioned capacity. Accounting for the fact that the industry needs a few years to develop the capacity, the maximum implementation potential for the period analysed is reduced by 60 MW from 640 MW to 580 MW.
2. The **sellers' liability requirements** are likely to reduce the maximum implementation potential as a number of potential project developers cannot provide the guarantee at the signature of the PPA. These liability requirements were introduced to ensure the successful implementation of the auctioned capacity. After consulting with the two industry experts and a look at the current project pipeline in the country, it is estimated that this reduced the maximum achievable impact further by 30 MW from 580 MW to 550 MW.
3. After conducting analysis on whether the specifications of the **longevity of the PPA** might reduce the maximum achievable impact, no further downward adjustments have been made as the duration has been set after consultation with project developers to ensure a sufficiently long PPA duration.

After accounting for all policy design characteristics, the refined implementation potential is expected to be **550 MW** (compared to 640 MW before).

1 7.3.3 Design characteristics of tax incentive policies

2 *Table 7.3: Tax incentive policies - Influence of policy design characteristics on maximum implementation*
 3 *potential*

Design characteristics	Description	Influence on maximum implementation potential
Type of tax incentive	<ul style="list-style-type: none"> • Reduced or complete tax exemption or refunds • Deductibles • Tax credits • Different payment schedules • Fiscal stability incentives 	<ul style="list-style-type: none"> • Tax incentives that are too low provide insufficient incentives for eligible entities to install additional RE capacity, thus lowering the probability that the maximum implementation potential is achieved • Incentive policies incentivise RE in different ways: tax credits reducing the tax liability for (a portion of) the cost of purchasing and installing RE capacity is incentivised through direct cost saving; fiscal stability incentives that shield certain RE technologies from potential future changes in fiscal regime or from additional fees are mainly incentivised by creating a stable investment environment; decreased stability and low level of incentives lower the probability that the maximum implementation potential is achieved
Scope of application	<ul style="list-style-type: none"> • Pre-investment expenses related to RE projects • Sale of electricity • Carbon credits and other ancillary income • RE-specific taxes or concession fees • Services and equipment • Civil works 	<ul style="list-style-type: none"> • A narrow scope of tax incentive (potentially) decreases the incentive for eligible entities to install additional RE capacity, lowering the probability that the maximum implementation potential is achieved • Restricted eligibility that is limited to few RE technologies may lower the probability that the maximum implementation potential is achieved, as eligible entities have less flexibility to choose the most appropriate technology

4 *Source: Adapted from IRENA 2015b; North Carolina Solar Center 2012; OECD 2011.*

5 *Box 7.5: Tax incentive policy - Example of using policy design characteristics to refine maximum*
 6 *implementation potential*

[placeholder]

7 7.4 Account for effect on financial feasibility of RE technologies

8 RE policies provide financial incentives, thus directly influencing the financial feasibility of RE
 9 technologies and in turn the implementation potential of the policy. It is a *key recommendation* to identify
 10 factors that affect the financial feasibility of RE technologies and account for their effect on the refined
 11 implementation potential of the policy

12 In this step, users make an initial estimate of the effect of the policy on the financial feasibility of RE
 13 technologies (section 7.4.1). Users should then account for alternative cost considerations, other policies

1 in the sector, and sector trends (covered in Sections 7.4.2, 7.4.3, 7.4.4 respectively). The effect of
2 financial barriers on the implementation potential of the policy are considered separately in the barrier
3 analysis (Section 7.5).

4 7.4.1 Identify factors that affect the financial feasibility of RE technologies

5 Users should identify the level of incentive provided by the policy and ascertain its effect on the financial
6 feasibility of RE technologies. There are a number of factors to consider, including:

- 7 • **Cost of the technology in the local market:** This includes capital costs, operations and
8 maintenance costs, and fuel (e.g., bio-energy) costs. There may be mark-ups in local markets
9 that may arise due to inexperience with a given technology in the country, such as a shortage of
10 engineers that necessitates bringing in outside expertise.
- 11 • **Technical characteristics of the technology:** For example, capacity of the technology, load
12 characteristics and operational lifetime of the technology.
- 13 • **Project financing:** This includes financing sources and their conditions, such as interest rates
14 and duration of loans.
- 15 • **Cost and technical characteristics of alternative technologies:** For example their capital
16 costs, operations and maintenance costs, and fuel costs.
- 17 • **Electricity price:** Levelised cost of electricity is a common way of calculating electricity price and
18 further information is provided below.
- 19 • **Variations in resource potential:** For example, wind resource may be higher in some parts of
20 the country than others, and this influences wind turbine load capacity and therefore financial
21 feasibility.

22 *[placeholder – more guidance for the above list may be developed for subsequent drafts]*

23 The following data sources, prioritised from top to bottom, may be useful in estimating the financial
24 feasibility of RE technologies:

- 25 • Calculations made during policy set-up
- 26 • National cost studies (e.g., from low emissions development strategies (LEDS))
- 27 • Global cost estimates (e.g., from International Energy Agency (IEA World Energy Outlook
28 database,¹³ or IRENA RE technology costs with a country-specific resolution¹⁴)

29 Calculating levelised cost of electricity

30 The levelised cost of electricity (LCOE) is the unique cost price of the outputs of an energy project that
31 makes the present value of the revenues equal to the present value of the costs over the lifetime of the

¹³ Available at: <http://www.worldenergyoutlook.org/aboutweo/>.

¹⁴ See “References” section.

1 project. It is often taken as a proxy for the average price that the energy project must receive in a market
2 to break even over its lifetime.

3 The financial feasibility of technologies can be estimated by comparing the LCOE for RE to either the rate
4 provided by the policy (for feed-in tariffs policies and auction policies)¹⁵ or the generation costs of
5 technologies that will be displaced by the RE technology (for tax incentive policies). These will either be
6 the costs for existing plants if they are expected to be displaced as a result of the policy, the average
7 electricity generation costs across the electricity grid if such information is not available, or the costs for
8 plants that would have been built in the absence of the policy. The LCOE should be calculated separately
9 by technology and, where possible, also by location.

10 For example, users might conduct separate calculations for solar PV installations in different regions of
11 country if the solar potential can be divided into different geographic areas (see example in Box Box 7.5).
12 Similarly, this can be done for other RE technologies such as onshore wind. Where data availability is
13 scarce, users should use global data figures that are readily available from sources such as the IPCC
14 Working Group III Contribution to the Fifth Assessment Report, Mitigation of Climate Change, Chapter 7,
15 Energy Systems¹⁶.

16 Users should use current data. Where the policy has a long-time horizon, users should also consider
17 future cost decreases achieved through technology learning and economies of scale. Users may also use
18 technology learning curves or consult experts on the cost development of renewable technologies.
19 Technology will be cheaper in the future if it is widely diffused, even though cost spikes may still occur
20 due to reasons such as increased demand or changes in the prices of raw materials (e.g., in the case of
21 wind energy, increased steel prices).

22 There are several reasons that current generation costs differ from future generation
23 costs. First, some power plants currently in use will likely depreciate, bringing down
24 average generation costs. Second, electricity generation options that were historically
25 available may not be available in the future, as is the case for hydropower. Third, stricter
26 environmental regulations may increase the cost of electricity generation (e.g., through
27 stricter air pollution requirements that may require retrofitting of existing plants and/or
28 may reduce their efficiency). Considered together with technology learning, these
29 factors may lead to higher or lower costs depending on the specific situation in the
30 country. Figure Figure 7.1 illustrates the how to calculate the LCOE for RE sources for
31 an example biomass combined heat and power (CHP) technology. The complete
32 formula for calculating the LCOE is provided in Appendix Additional information to report
33 (if relevant)

- 34 • The type of technical review undertaken (first-, second-, or third-party), the qualifications of the
35 reviewers and the review conclusions. More guidance on reporting information related to
36 technical review is provided in Chapter 9 of the *Technical Review Guidance*.


¹⁵ Note that for auction policies this only applies to cases where there is a maximum price that cannot be exceeded. In a competitive auction process without such a price the rate will only be known after the round of auctions has finished. In these cases, the economic feasibility analysis will only provide limited insights.

¹⁶ Available at: https://www.ipcc.ch/pdf/assessment-report/ar5/wg3/ipcc_wg3_ar5_chapter7.pdf.

1 Appendix A: Calculation of LCOE for RE Sources

2

3 Figure 7.2: Calculation for LCOE for RE sources for a biomass CHP

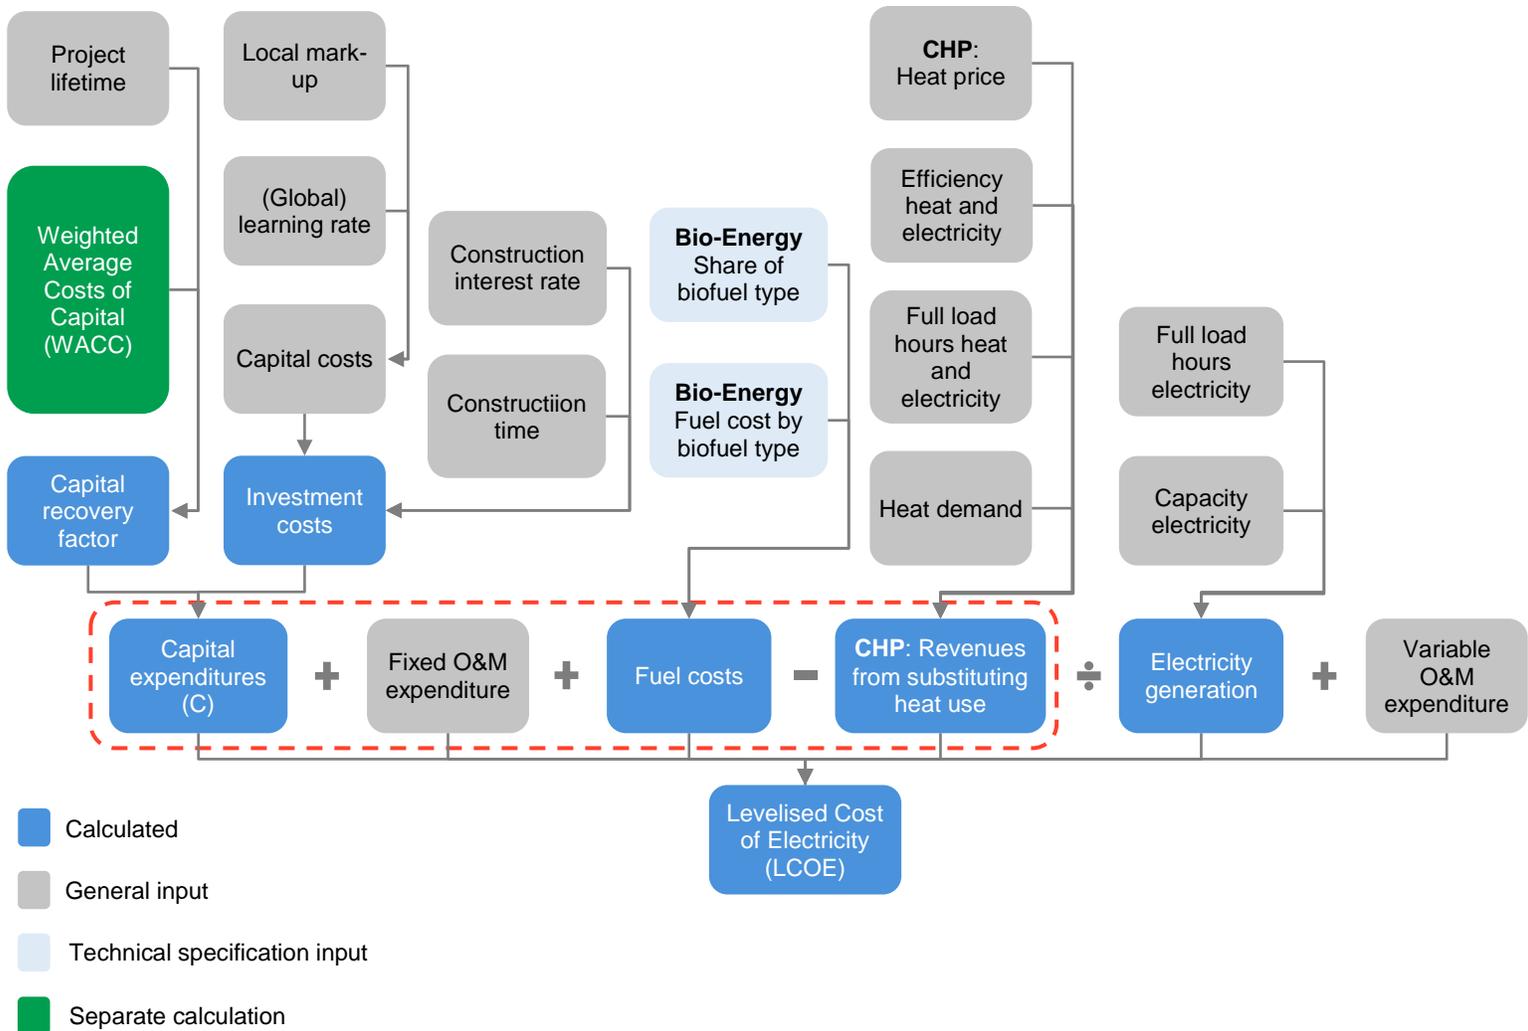


4

5 Source: Adapted from Röser and Hagemann 2015.

6 Financing is an important part of the generation cost. Project finance generally comes in three different
 7 forms: equity, private debt financing and public debt financing. In the calculations, these are captured in
 8 the weighted average cost of capital (WACC). WACC is the rate a company is expected to pay on
 9 average to compensate all of its investors. Figure Figure 7.2 illustrates the WACC composition and
 10 assumptions. The complete calculation formula for the WACC for RE sources is provided in Appendix B:
 11 Calculation of the Weighted Average Costs of Capital

12

1 *Figure 7.3: WACC composition and important assumptions*

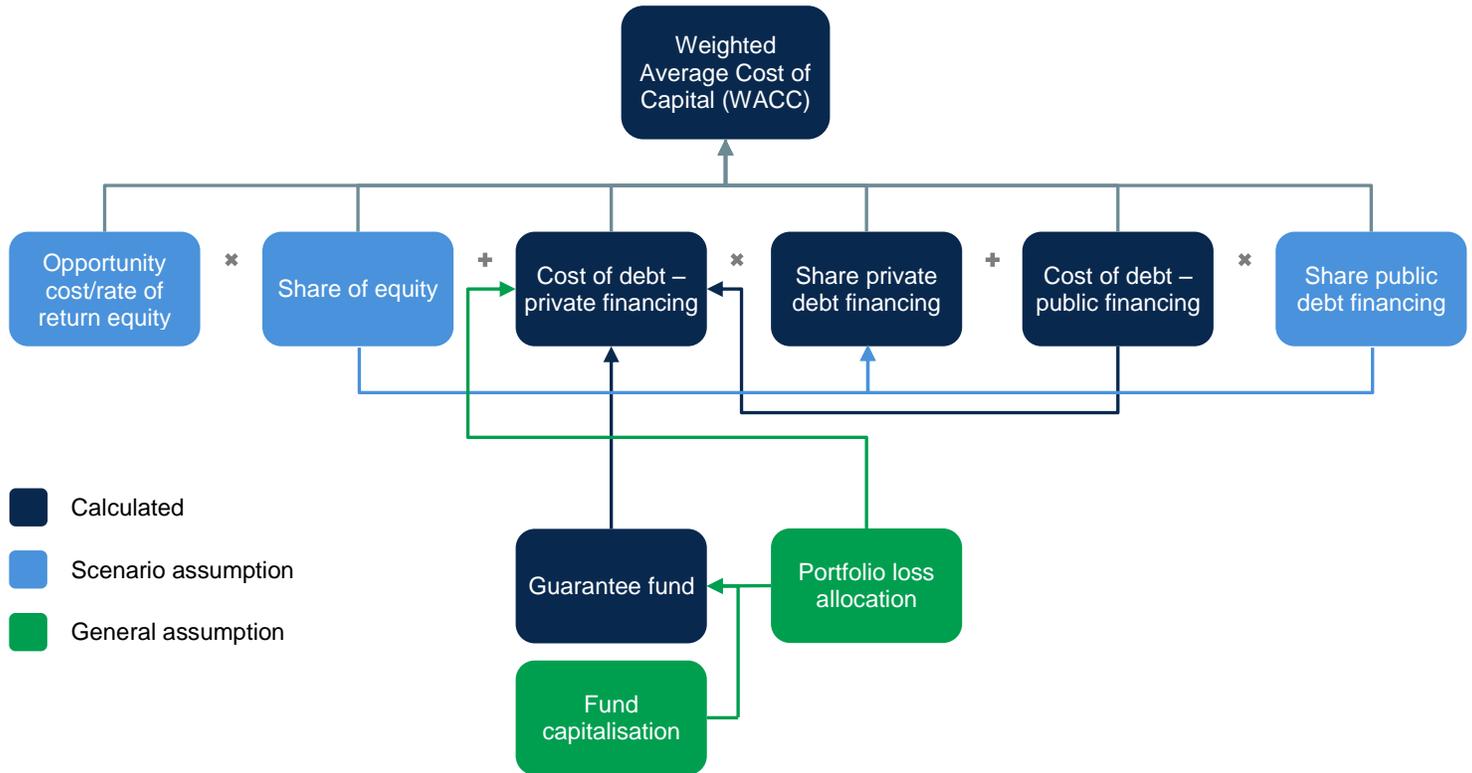

2

3 *Source:* Adapted from Röser and Hagemann 2015.

4 Where users have sufficient information about financing sources, they may calculate the LCOE based on
 5 assumptions about the role of each finance source. For instance, there may only be a limited amount of
 6 public low-cost financing available and/or a guarantee fund may exist with limited capitalisation. In these
 7 cases, users can calculate the LCOE separately for the amount of financing available.

8 The term *wholesale market price* is used here to represent a more complex situation. In reality, the
 9 wholesale market price depends on the particular situation in the country that dictates specific market
 10 prices with which RE technologies have to compete. The price depends on the type of market, but also on
 11 the point in time the electricity will feed into the grid.¹⁷ In many countries, the technology will have to
 12 compete with several different prices, depending on the point in time that the electricity is fed into the grid.
 13 The wholesale market price can be used to represent an average price that should be chosen carefully.
 14 Below is a list of possible conclusions that can be drawn from this step of the assessment:

- 15 • **LCOE RE > wholesale market price/tariff:** Where a certain technology has a higher cost than
 16 the current generation costs or tariff, it is likely to exist only in niches. If no such niches are
 17 available, the technology will likely not be diffused.

¹⁷ Next Kraftwerke 2016.

- 1 • **LCOE RE < wholesale market price/tariff:** Where a certain technology has lower costs than the
2 current generation costs or tariff, it is likely to diffuse. For these calculations, users can assume
3 that the financial analysis does not further restrict the implementation potential of the policy.
- 4 • **LCOE RE < wholesale market price for certain financing options, or a limited number of
5 projects only:** The technology may only be feasible for a limited number of cases (e.g., only for
6 wind sites with a wind speed higher than a certain threshold).

7 7.4.2 Account for alternative cost considerations (if relevant)

8 As discussed in the Section 7.4.1, the electricity generated by renewable energy technologies will be fed
9 directly into the grid in most cases. Therefore, the LOCE is compared to the electricity market wholesale
10 price to identify the financial feasibility of such technology in a competitive market setting.

11 In some country contexts, however, there are certain alternative cost considerations that need to be
12 accounted for when analysing the financial feasibility of certain renewable technologies from the
13 perspective of the investor. This crucially depends on the country context and the policy design
14 characteristics.

15 For example, if a tax incentive policy is eligible regardless of whether the electricity is fed into the grid or
16 consumed by the investor directly without ever being fed into the grid, households or industrial entities (as
17 the investors in solar PV installations) might install additional RE capacity even if the LOCE is below the
18 electricity wholesale market price. This is due to the fact that in such a context, the investors (i.e.,
19 households and/or industrial entities) compare the location-specific electricity production costs plus the
20 granted financial support to the end-consumer prices they pay for the consumption of electricity from the
21 grid.

22 These end-consumer prices are well above the electricity wholesale market price as they take account of
23 transmission and distribution as well as system costs. In such cases, users should replace what is
24 referred to as wholesale market price in the Section 7.4.1 with the cost of the alternative (i.e., the end
25 consumer price):

- 26 • **Residential customer's own consumption** (ideally with net metering in place): Comparison of
27 production costs plus financial support to end-consumer prices
- 28 • **Industrial generation for own consumption:**
 - 29 ○ Separate analysis should be done for all RE technologies considered
 - 30 ○ Calculations provide users with an indication of whether there will be any capacity
31 extension; if so, analysis will provide specific technologies (and possibly which areas)
 - 32 ○ Comparison of end-consumer prices for industrial entities and RE production prices (with or
33 without feed-in tariff or tax incentive)
 - 34 ○ Feasibility of analysis depends on regulations in the jurisdiction (e.g., whether "off-site"
35 generation is allowed and, if so, whether policies on transmission exist)

36 If industrial entities and/or households install RE capacity for the purpose of own consumption under a
37 given policy (under which the financial support is granted regardless of whether the electricity is fed into
38 the grid), this might result in higher overall RE capacity deployment as the comparison of LCOEs with

1 wholesale market price would result in. Again, users might need to account for regional differences and
2 conduct separate analyses for different regions.

3 Users should critically reflect whether such additional analysis is necessary given the country context and
4 policy design characteristics of the respective policy.

5 7.4.3 Consider effect of other policies in the sector

6 Other policies in the sector may affect the financial feasibility of RE technologies. They may also enable
7 or impede the implementation of the policy. Policies that may interact with the financial feasibility of
8 policies include:

- 9 • Emissions trading programs, which may provide an additional incentive for RE technologies by
10 increasing the cost of alternative technologies
- 11 • Taxes, such as energy or carbon taxes
- 12 • Energy regulations, such as mandatory closing of inefficient plants and quotas for fuels
- 13 • Subsidies, such as fossil fuel subsidies, or direct and indirect electricity subsidies

14 *[placeholder – more guidance for this section may be developed for subsequent drafts]*

15 7.4.4 Consider effect of sectoral trends

16 Sectoral trends can reinforce or counteract RE policies and the financial feasibility of RE technologies.
17 Sectoral trends include:

- 18 • Changes in fossil fuel prices that can cause shifts between fossil fuels (e.g., shift from coal to
19 natural gas due to lower costs of natural gas), or alter the financial feasibility of RE power plants
- 20 • Public support or opposition to certain technologies, such as onshore wind turbines
- 21 • Global trends in technology costs, such as the falling costs of solar PV panels in recent years
- 22 • Shifts in consumer behaviour, such as increasing demand for renewable electricity

23 7.4.5 Examples of using financial factors to refine implementation potential

24 *Box 7.6: Feed-in tariff policy - Example of using financial factors to refine implementation potential*

The LCOE calculations for the country revealed costs between 10 cents/kWh and 17 cents/kWh for various locations. Since the solar potential can be roughly divided into four geographic areas, four different representative full load hour estimates were used to estimate these location-specific LCOE costs. The feed-in tariff rate is fixed at 13 cents/kWh. Solar PV will likely be developed in only two of the four geographic areas in which the LOCE is above the wholesale electricity price (i.e., the feed-in tariff rate). As the two regions in which no solar PV will be developed have a total maximum capacity of 100 MW (relatively low due to low solar radiation and relatively swampy regions where only limited capacity could be installed), this reduces the implementation potential of the policy from **800 MW to 700 MW**.

Since both stand-alone and rooftop installations are eligible under the feed-in tariff, this should not further reduce the implementation potential in the two geographic areas with higher solar potential, as

both areas have meaningful electricity loads and ample space available to build the plants.

The feed-in tariff provides a large degree of certainty to the investor, thereby attracting financing even from risk-averse sources. However, access to finance in general is limited in the country. Even with the guarantee provided by the feed-in tariff, the number of investors will be small. Therefore, after consultation with financial experts in the country, the implementation potential is further refined from **700 MW to 600 MW**.

1 *Box 7.7: Auction policy – Example of using financial factors to refine implementation potential*

Since the auction policy provides separate auctions by technology and there is no ceiling price for the auction, the financial feasibility assessment does not result in a downward revision of the implementation potential. However, access to financing in the country is very limited and only a small number of private investors are willing to invest in RE. This limits the number of plants that can be constructed. A simple comparison of the investment finance needed with the financing available shows that the overall achievable RE addition with the existing financing is between 400 MW and 500 MW. To be conservative, the implementation potential is refined to **450 MW**.

2 **7.5 Account for other barriers**

3 There are several barriers that can hinder RE deployment, including technical, regulatory, institutional,
4 market, financial, infrastructure, awareness and public acceptance barriers. It is a *key recommendation* to
5 identify other barriers not addressed by the policy and account for their effect on the implementation
6 potential of the policy. The barrier analysis focuses only on those barriers not directly addressed by the
7 policy being assessed.

8 Users should follow the steps below to identify barriers and account for their effect on the implementation
9 potential of the policy. Chapter 11 provides a template table to assist users in accounting for other
10 barriers which can be modified as needed.

11 Where users choose not to use the approach below, they can use country-specific studies that identify
12 barriers and account for their effect, or use expert judgment to assist them in their assessment. Other
13 tools are also available, such as the GIZ *Barriers-to-objectives weighting method*,¹⁸ which provides a
14 quantitative method for evaluating barriers on a project level. Such tools could be used to account for
15 other barriers or in support of the steps outlined below.

16 **7.5.1 Step 1: Identify barriers**

17 Table 7.4 lists barrier categories, and provides descriptions and examples for each. Use this
18 categorisation to identify and describe barriers to RE deployment in the geographic area of the policy,
19 note if no barriers are identified for a given barrier category.

20 *Table 7.4: Barrier categories*

Barrier	Description	Examples
---------	-------------	----------

¹⁸ Available at: <https://www.transparency-partnership.net/giz-2011-climate-results-giz-sourcebook-climate-specific-monitoring-context-international-cooperatio>.

category		
Technical	<ul style="list-style-type: none"> • Technical standards (e.g., uniform engineering or technical criteria, methods, processes and practices) are lacking for some RE technologies • Lack of sufficient technology providers 	<ul style="list-style-type: none"> • No technical standard exists for a biomass technology that is eligible under the policy • There is a limited number of technology providers for a certain technology that is eligible under the policy
Regulatory and policy uncertainty	<ul style="list-style-type: none"> • Insufficient clarity and transparency in existing regulations or in the development of new policies 	<ul style="list-style-type: none"> • Lack of transparency in policy set-up of feed-in tariff policy and history of ad-hoc changes in regulation increase uncertainty, which discourages market actors from participating in the policy
Institutional and administrative	<ul style="list-style-type: none"> • Lack of strong and dedicated institutions to carry out policies • Permits for new RE plants are difficult to obtain, approval procedures are lengthy and cumbersome, or there is a lack of spatial planning for RE • Unclear procedures and responsibilities and/or complex interactions and lack of coordination between the various authorities involved • Other barriers in the energy system, such as existing industry, infrastructure and energy market regulation, intellectual property rights, tariffs on international trade, and allocation of government financial support 	<ul style="list-style-type: none"> • Several institutions claim responsibility for implementation of the policy • Unclear procedures on how to participate in or receive assistance from policy, which discourages market actors
Market	<ul style="list-style-type: none"> • Inconsistent pricing structures that put renewables at a disadvantage • Asymmetrical information between market actors • Market power and subsidies for fossil fuels • Blockage of incumbent actors and limited access of new actors to the market • Import tariffs and technical barriers that impede trade in renewables • Access to market 	<ul style="list-style-type: none"> • Existing fossil fuel subsidies (direct or indirect) prevent large-scale RE deployment through the policy • Incumbent market actors possess information advantage and have direct or indirect influence on policy design process that limits access for new market actors • High import tariffs or domestic content requirements hinder deployment of technologies
Financial	<ul style="list-style-type: none"> • Absence of adequate funding opportunities and financing products for RE • Financing is unreasonably costly for RE technologies • Concerns about possible devaluation of asset value • Disproportionately high transaction costs in relative terms 	<ul style="list-style-type: none"> • Insufficient funding available in domestic context due to high up-front costs of RE investments • Substantial concerns about financial solvency of state-owned utilities that discourage market actors to use policy
Infrastructure	<ul style="list-style-type: none"> • Lack of flexibility of the energy system (i.e., of the electricity grid to integrate or absorb RE) 	<ul style="list-style-type: none"> • History of technical problems with grid infrastructure preventing

	<ul style="list-style-type: none"> • Energy markets are not prepared for RE (i.e., integration of intermittent energy sources, grid connection and access is not fairly provided) • Higher grid connection costs for RE 	decentralised access of RE to grid
Lack of awareness of RE and skilled personnel	<ul style="list-style-type: none"> • Insufficient knowledge about availability, benefits and performance of renewables • Insufficient numbers of skilled workers and lack of training and education • Lack of general information and access to data relevant to RE deployment (i.e., deficient data about natural resources) • Lack of experience and expertise among the relevant stakeholders, including project sponsors and developers, investors and financiers, and regulators and authorities 	<ul style="list-style-type: none"> • Deficient number of skilled workers for the installation of wind turbines
Public acceptance and environmental	<ul style="list-style-type: none"> • Linked to experience with planning regulations and public acceptance of RE • Lack of research into the more complex interactions between RE technologies and the environment • Competition with other interests in the geographic area, such as fishing, shipping and aviation, recreational use of land, archaeological and historical heritage interests, civil and military airport interests 	<ul style="list-style-type: none"> • Lack of public acceptance of policy due to perceived high economic and social costs, and a lack of understanding and misleading information • Environmental concerns due to major investments in new infrastructure, in particular overland transmission lines

1 7.5.2 Step 2: Evaluate severity of barriers

2 Evaluate the severity of barriers using a predefined scale, such as a scale from 1 to 5, with 1 indicating
3 low impact and 5 indicating very severe impact. Barriers that are considered to be very severe are ones
4 that entirely inhibit the policy from having any impact. Barriers will most likely inhibit a given aspect of the
5 policy and not the entire policy. (Further guidance on how to account for barriers on the implementation
6 potential is provided in in Section 7.5.4.) Identify the way in which the barrier affects the implementation
7 potential of the policy.

8 The evaluation can involve expert judgment, desk reviews and stakeholder consultations. Refer to the
9 ICAT *Stakeholder Participation Guidance* (Chapter 8) for information on designing and conducting
10 consultations.

11 7.5.3 Step 3: Identify other policies that may help overcome barriers

12 For each barrier identified, identify other policies or actions in the country that may help overcome the
13 barrier, and provide a description of how and to what extent such policies/actions may help overcome the
14 barrier. Adjust the evaluation of the effect of the barrier accordingly (most likely to decrease the severity).

15 7.5.4 Step 4: Determine effect of barriers on implementation potential

16 Determine how the barriers effect implementation potential as follows:

1 1. Determine the effect of each barrier on the implementation potential of the policy: For example,
 2 the outcome of the barrier analysis might indicate that a barrier reduces the implementation
 3 potential of the policy by x%. The reduction can take place on two different levels depending on
 4 the setup of the policy as follows:

- 5 a. General level: The barrier affects the entire policy (e.g., barriers that hinder the
 6 deployment of all RE technologies). In this case, the effect of the barrier on
 7 implementation potential applies to the entire policy's impact.
- 8 b. Technology level: The barrier only affects one specific RE technology supported by the
 9 policy (e.g., specific barriers that hinder the deployment of solar PV installations). In this
 10 case, the effect of the barrier on implementation potential only applies to the policy's
 11 implementation potential on this specific technology.

12 For barriers that are categorised as very severe, identify the precise aspect of the implementation
 13 potential or RE resource potential to which the barrier relates (e.g., wind energy in a particular
 14 region). Then reduce the impact of the policy to zero for this aspect of the implementation
 15 potential or RE resource potential.

- 16 2. Determine overlaps between the barriers: Identify whether and to what degree the barriers'
 17 impacts overlap, and account for this overlapping effect.
- 18 3. Account for the effect of all barriers on the implementation potential: Calculate the potential
 19 impact of all barriers while accounting for the potential overlap. This outcome may be supported
 20 with an uncertainty range to account for uncertainty about the likelihood and magnitude of one or
 21 multiple barriers (whereby the refined implementation potential is expressed as a range of, for
 22 example, MWs, as illustrated in Box Box 7.7).

23 7.5.5 Examples of accounting for other barriers

24 The two boxes below provide examples of accounting for other barriers for a feed-in tariff policy and
 25 auction policy, respectively.

26 *Box 7.8: Feed-in tariff policy – Example of accounting for other barriers to refine implementation potential*

In **Step 1**, the main barriers for the feed-in tariff are identified using the list of barrier categories:

- **Technical:** No technical standard for rooftop solar PV installations; no domestic technology providers for rooftop solar PV installations
- **Regulatory and policy uncertainty:** History of numerous ad-hoc policy changes and adjustments, leading to a general lack of transparency and uncertainty for market actors
- **Institutional and administrative:** Permits for new RE plants are difficult to obtain as approval procedure is lengthy, non-transparent and cumbersome
- **Market:** Existing fossil fuel subsidies for low- and medium-income households
- **Financial:** Concerns about financial solvency of only state-owned utilities with history of defaults
- **Infrastructure:** None

- **Lack of awareness of RE and skilled personnel:** Lack of skilled personnel to install solar PV panels
- **Public acceptance and environmental:** None

In **Step 2**, the severity of each identified barrier is evaluated and rated on a scale of 1 to 5, with 5 indicating very severe.

- No technical standard and no domestic technology providers for rooftop PV installations: 5
- Policy uncertainty due to history of ad-hoc policy changes and adjustments: 2
- Slow and non-transparent permit approval process: 3
- Existing fossil fuel subsidies for low- and medium-income households: 1
- Concerns about financial solvency of only state-owned utilities with history of defaults: 3
- Lack of skilled personnel to install solar energy panels: 2

In **Step 3**, other policies are identified that may help the feed-in tariff policy overcome barriers to RE deployment. A separate policy enacted to fix the slow and non-transparent permit approval process addresses this barrier. The Ministry of Energy is currently carrying out a comprehensive reform of its entire approval processes due to new anti-corruption legislation. Thus, the permit approval process will be entirely redesigned to promote a faster and more transparent process. Even though the reform process may require a transitional phase, it is deemed sufficient to overcome the barrier.

In **Step 4**, the effect of barriers on the implementation potential is estimated. The extent of this effect is based on expert judgment:

- **No technical standard and no domestic technology providers for rooftop solar PV panels:** Barriers are categorised as very severe (in Step 2), indicating that no installations can be expected for rooftop solar PV installations under the feed-in tariff policy. A national university had estimated that 50 MW of the 800 MW implementation potential of the policy directly links to rooftop installation. These 50 MW are subtracted from the policy's impact of 600 MW, resulting in 550 MW
- **Policy uncertainty due to history of ad-hoc policy changes and adjustments:** 5% to 8% (general level) based on the assessment on how policy uncertainty affects investor behaviour using survey data with a small representative sample of investors
- **Slow and non-transparent permit approval process:** Barrier is overcome by other policy intervention to reform permit approval process (discussed under Step 3).
- **Existing fossil fuel subsidies for low- and medium-income households:** 3% to 4% (general level) based on experience with household behaviour in the past
- **Concerns about financial solvency of only state-owned utilities with history of defaults:** Minus 20% to 30% (general level) based on the assessment on how policy uncertainty affects investor behaviour using survey data with a small representative sample of investors
- **Not enough skilled personnel to install solar energy panels:** 20% (technology level)

based on market assessment on the number of skilled personal to install solar energy panels

As the impact of the *lack of skilled personnel to install solar PV panels* partially overlaps with the impact of *no domestic technology providers for rooftop PV installations*, the barrier-specific impact cannot be aggregated. As the overlap accounts for about 5%, the total effect of the barriers is between 43% to 57%.

The result of the barrier analysis is an estimated effect of feed-in tariff policy of between 237 MW and 314 MW. The range represents the uncertainty associated with the identified barriers.

1 *Box 7.9: Auction policy - Example of accounting for other barriers to refine implementation potential*

In **Step 1**, the main barriers for the auction policy are identified using the list of barrier categories:

- **Technical:** None
- **Regulatory and policy uncertainty:** None
- **Institutional and administrative:** None
- **Market:** High domestic fossil fuel subsidies
- **Financial:** Financing costs relatively high for RE project developers
- **Infrastructure:** Grid infrastructure is not flexible enough to be linked to numerous RE installations
- **Lack of awareness of RE and skilled personnel:** None
- **Public acceptance and environmental:** None

In **Step 2**, the severity of each identified barrier is evaluated using expert judgment, and rated. None are rated as *very severe*.

- High domestic fossil fuel subsidies: 1
- Financing costs relatively high for RE project developers: 2
- Problems with flexibility of grid infrastructure: 3

No other policies help overcome the barriers in **Step 3**.

In **Step 4**, the overall impact factor applied to the auction policy is estimated using the barrier analysis. The identification of barrier-specific impact factors is based on expert judgment:

- **High domestic fossil fuel subsidies:** Minus 2% to 5% (general level) based on experience with fossil fuel subsidies in the past
- **Financing costs relatively high for RE project developers:** Minus 5% to 10% (general level) based on market analysis of how available financing options for investors affect RE deployment and a survey with a representative sample of investors
- **Problems with flexibility of grid infrastructure:** Minus 10% (general level) based on analysis of current status of grid infrastructure and planned improvements over the course of assessment period

The identified barriers do not overlap, thus the barrier-specific impacts can be aggregated. The overall impact factor is determined to be 17% to 25%, accounting for the uncertainty range for the overall impact of the identified barriers.


As a result of the barrier analysis, the auction policy's impact is estimated to be between 338 and 374 MW, displaying the range of uncertainty for the specific impact of the identified barriers.

1

8. ESTIMATING GHG IMPACTS OF THE POLICY EX-ANTE

This chapter provides guidance for the second step of ex-ante impact assessment - translating estimated RE addition in the policy scenario into GHG impacts. The GHG impacts can either be expressed as a GHG emission level or as GHG emission reductions achieved by the policy.

Figure 8.1: Overview of steps in the chapter

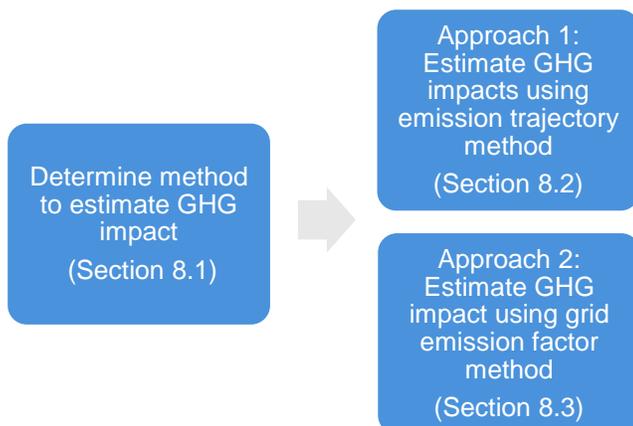

Checklist of key recommendations

- Choose the method for estimating GHG impacts based on the objectives of the assessment, and the policy's expected impact and timeframe
- Estimate the emission trajectory using energy models where feasible, and otherwise using the method for limited data availability
- Estimate the GHG impact using a grid emission factor calculated using the CDM combined margin emission factor approach or emission factor modelling

8.1 Determine method to estimate GHG impacts from RE addition

Users should choose between two methods for translating estimated RE addition into GHG impacts: the emission trajectory method and the grid emission factor method.

The emission trajectory method develops a trajectory for future emissions from the electricity grid based upon the expected future mix of generating technologies. The method involves making assumptions about the future electricity mix, and can be done using limited data or more complex models that model the energy sector development in detail. The resulting emission trajectory can either be used as a stand-alone assessment to determine whether the trajectory is on track to meet a target, or in combination with a baseline scenario to determine the emission reductions.

The grid emission factor method assumes that the RE addition displaces grid electricity and calculates the GHG impacts of the policy based upon the emission factor of the current electricity grid. This method is appropriate for policies with a limited impact on the grid since it uses simple assumptions about the future development of the entire energy sector. Users assume that the generated electricity resulting from the policy will displace carbon-intensive electricity generation and, to a certain extent, replace future carbon-intensive capacity additions. The grid emission factor reflects the emission intensity of carbon-

1 intensive electricity generation being displaced by the RE addition. For installations that feed into the
 2 electricity grid, this is equal to the grid emission factor, which serves as the baseline emission factor.

3 Table 8.1 provides further information about the two methods.

4 *Table 8.1: Overview of emission trajectory and grid emission factor methods*

Method	Approach	Objective	Advantages	Disadvantages
Emission trajectory method	Modelling of sectoral emissions development	<ul style="list-style-type: none"> To estimate sectoral GHG emission levels achieved after an intervention To estimate GHG emission reductions from interventions (by comparing baseline GHG emissions to policy GHG emissions) <i>Especially suitable for larger scale interventions</i> 	<ul style="list-style-type: none"> Dynamic; accounts for interactions between the RE technologies incentivised by the policy and the electricity mix over time Emission level calculations; not necessary to develop a baseline scenario 	<ul style="list-style-type: none"> Low level of standardisation; many commonly used models exist (e.g., LEAP), though there is no standardised approach for developing emission trajectories
Grid emission factor method	Emission factors reflect emissions intensity of displaced technology	<ul style="list-style-type: none"> To estimate GHG emission reductions from interventions <i>Especially suitable for single projects or other smaller scale interventions</i> 	<ul style="list-style-type: none"> High level of calibration; methodologies have been developed for a wide range of GHG emissions reduction interventions under the CDM and revised and improved over time Methods are widely accepted and used for project-level analysis, including through harmonisation efforts of bilateral and multilateral funds 	<ul style="list-style-type: none"> Relatively static; methods account for future development (e.g., operating margin method) but only to a limited extent Assumptions about the baseline scenario may be contested More challenging to estimate GHG impacts over longer timeframes

5 It is a *key recommendation* to choose the method for estimating GHG impacts based on the objectives of
 6 the assessment, and the policy's expected impact and timeframe.

7 Users should choose between the emission trajectory method and grid emission factor method
 8 considering the following two interrelated factors:

- 9 • **Impact on the energy system:** The policy may have a smaller impact on the energy system or
 10 may be a larger intervention with more impact on the energy mix in the sector. The degree of
 11 impact of the energy mix further depends on two factors: the size of the energy system and the
 12 size of the intervention. In small energy systems, small interventions (e.g., single projects or
 13 small-scale policies) can also substantially alter the energy mix in the sector. In general, the
 14 emission trajectory method is more appropriate for policies with larger impacts on the energy
 15 system, and the grid emission factor method is more appropriate for those with small impacts.

- 1 • **Timeframe of the intervention:** Interventions with shorter timeframes (e.g., single projects or
2 policies with shorter timeframes) will have less impact on the energy system, whereas
3 interventions with longer time frames will have a larger impact.

4 Users should also choose whether they want to estimate a GHG *emission level*, or GHG *emission*
5 *reductions* achieved by the policy, based on the objectives of the assessment:

- 6 • **GHG emission level:** Appropriate in particular for determining whether policies are on track to
7 meet goals such as NDCs or RE targets and to inform goal setting. The emission trajectory
8 method should be used for meeting these objectives (the grid emission factor method is not
9 designed for these objectives).

- 10 • **GHG emission reductions:** Appropriate in particular for assessing the effectiveness of policies
11 and improving their design and implementation. Either the emission trajectory method or grid
12 emission factor method can be used to meet these objectives.

13 8.2 Approach 1: Estimate GHG impacts using emission trajectory method

14 An emission trajectory is used either on its own (to determine whether the trajectory is on track to meet an
15 RE target) or in combination with a baseline scenario (to determine the GHG emission reductions the
16 policy is estimated to achieve). The steps below are followed for estimating emission trajectories for both
17 policy scenarios and baseline scenarios.

18 It is a *key recommendation* to estimate the emission trajectory using energy models where feasible, and
19 otherwise using the method for limited data availability. If the user is determining a baseline scenario, the
20 same approach should be used for both the baseline scenario and policy scenario.

21 8.2.1 Estimate emission trajectory using an energy model

22 Several institutions have developed global models for countries to analyse energy policy and to forecast
23 GHG emissions under different scenarios. Table Table 8.2 provides an overview of the most commonly
24 used models. Users can use these and other suitable models to estimate the emission trajectory. The RE
25 addition calculated in Chapter 7 should be used as an input for these models, such that the resulting
26 emission trajectory is based on the additional RE deployment that the policy is expected to achieve.

27

1 *Table 8.2: Overview of commonly-used energy models*

Model	Institution	Description	Link
LEAP	Stockholm Environment Institute (SEI)	Software tool for energy policy analysis and climate change mitigation assessment. LEAP model has been used in 190 countries worldwide undertaking integrated resource planning, GHG mitigation assessments, and development of LEDS. LEAP is an integrated, scenario-based modelling tool that can be used to track energy consumption, production and resource extraction in all sectors of an economy. It can be used to account for both energy sector and non-energy sector GHG emission sources and sinks.	Climate-smart planning platform: http://climatesmartplanning.org/dataset/long-range-energy-alternatives-planning-system-leap-tool.html SEI LEAP: http://sei.us.org/software/leap
MARKAL-TIMES	International Energy Agency	MARKAL-TIMES is a software tool that generates technical-economic models of global, regional, national and local energy systems. Based upon the characterisation of different energy technologies and demand devices, MARKAL-TIMES calculates the optimal mix of technologies and commodities. These models allow for the evaluation of energy plans, environmental policies, climate mitigation scenarios and new technologies in trade-off modes. The tool also allows for the projection of scenario dependent energy balances and GHG emissions inventories.	MARKAL-TIMES Climate Compatible Development Tools: http://climateplanning.org/tools/markaltimes TIMES model generator: http://iea-etsap.org/index.php/etsap-tools/model-generators/times
EFFECT	World Bank	EFFECT is an open and transparent modelling tool used to forecast GHG emissions from a range of development scenarios. It focuses on sectors that contribute to and are expected to experience a rapid growth in emissions. EFFECT has been used in eleven countries as of this writing, including Brazil, Georgia, Macedonia, Nigeria, Poland and Vietnam.	World Bank ESMAP: https://www.esmap.org/ World Bank EFFECT: https://esmap.org/EFFECT

2 The following resources provide information on tools for climate data, knowledge products and models
3 available for various countries:

- 4 • **Climate Smart Planning** (www.climatesmartplanning.org): Provides an in-depth overview of a
5 wide array of analytical models, tools, methods, procedures and guides for assessment of policy
6 and investment implementation
- 7 • **Climate Planning** (www.climateplanning.org): Guide to more than 30 different climate compatible
8 development tools for different purposes

9 Users can also consider using a book-keeping model such as the Carbon Transparency Initiative (CTI)
10 model, which contains data for all sectors, enabling the estimation of economy-wide emission trajectories
11 through the aggregation of electricity demand in individual sectors. Box 8.1 provides more information on
12 the CTI model.

1 *Box 8.1: Use of the Carbon Transparency Initiative model as a book-keeping tool*

The Carbon Transparency Initiative (CTI) is a project of ClimateWorks that seeks to create a transparent and granular Current Development Scenario that is based on policies, decarbonisation trends and energy-related investments. The CTI estimates national emission pathways through an indicator-led methodology that is based on an analysis of the drivers, such as policies, that shape emissions trends. This methodology allows for analysis of medium-term decarbonisation, sensitivity analysis based on policy and technology shifts, and identification of macro trends and regional targets comparisons. The Current Development Scenario covers 2005 to 2030.

The CTI methodology builds on various interlinked layers that combined allow for the estimation of national and sectoral emissions pathways. The tool is comprehensive in its coverage in that it covers all emission sources across all economic sectors. Through adjusting driver metrics at the (sub) sector level, the GHG impacts of policies can be estimated on the sectoral as well as the economy wide level. Linkages between the sectors as well as linkages with other drivers are integral to the model. In that way, the model serves as a book-keeping model and allows for estimating the aggregated emission effect of policies.

Emissions are calculated as a function of **activity** and **intensity** metrics.

Activity metrics refer to the behaviours that drive emissions. Examples include population, number of households, and households' demands for goods, services and energy. When an increase in activity increases demand for energy use, and depending on the fuel mix, annual emissions increases result.

Intensity metrics refer to both measures of energy and emissions resulting from a unit of activity, The emissions intensity is informed by the production method, which includes process emissions, and the fuel mix of energy.

2 8.2.2 Determine emission trajectory using method for limited data availability

3 Where data availability is limited, users should follow the three steps set out below.

4 Step 1: Estimate the development of electricity demand in the future

5 The starting point for any energy supply emission trajectory is to understand how electricity demand
6 develops over time. Choose between the following approaches, or combination thereof:

- 7 1. **Use existing country-specific electricity market forecasts:** Potential data sources include
8 ministry of energy, national energy research institutes, and international agencies such as IEA.
9 Where possible, users should use national data sources that are widely accepted among
10 policymakers, and developed or otherwise endorsed by the government.
- 11 2. **Where country-specific data and resources are not available, users may scale down data
12 from regional scenarios:** The easiest approach is to apply growth rates from the regional
13 scenarios to the historic data available for the country. However, users should consider how
14 representative the regional development is of national development. For example, the IEA World
15 Energy Outlook database includes Canada, USA and Mexico in the North American region.
16 Applying the growth rate for North America to historical data for Mexico would underestimate the

1 growth in the sector, as Mexico's current levels of renewables are much lower than those of the
 2 USA and Canada.

3 3. **Estimate the future electricity demand:** Where no electricity demand forecast for the country or
 4 region is available, users can make simple assumptions to estimate the electricity growth in the
 5 sector, including:

6 a. **Extrapolate historic growth rates:** Extrapolate historic data on electricity demand using
 7 linear or other trends that align with historic development.

8 b. **Link electricity growth to GDP growth:** This assumes that electricity growth and GDP
 9 growth are coupled. Users should bear in mind that certain processes have led to their
 10 decoupling, and they should make additional assumptions about autonomous energy
 11 efficiency improvements occurring in the economy.

12 4. **Obtain input from sectoral experts:** Consult national experts for estimates of growth and seek
 13 views on compound annual growth rates for electricity demand.

14 **Step 2: Estimate the development of technologies in the electricity mix**

15 Users should use the electricity demand (estimated in Step 1) and the RE addition (expressed in
 16 GWh/year and estimated in Chapter 7) to calculate the remaining electricity mix.

17 Calculate the difference between the electricity demand and the proportion of this demand that will be met
 18 by the net renewable electricity supplied to end-users. The net renewable electricity delivered to end-
 19 users can be calculated by subtracting the transmission and distribution losses and consumption by
 20 power plants from the gross RE generated. The remainder of the demand is met by conventional
 21 technologies.

22 Considering the policy interactions within a country is important when developing the emission trajectory.
 23 Where the policy is embedded in an integrated energy policy and/or other policies are in place that
 24 influence the generation mix, users should consider the effect these interactions have on the calculation
 25 of the remaining electricity generation. For example, a sectoral policy to phase out coal-fired power plants
 26 should be accounted for in the emission trajectory.

27 Having determined the remaining electricity generation based on the estimated RE addition, the split
 28 across different fuel and technology types should be determined for the remaining electricity supply.
 29 Users should choose between the following approaches, or combination thereof, to achieve this:

30 1. **Assume that the share of different technologies in the electricity mix remains as is.** Use
 31 data on share of different technologies from the most recent year for which data is available and
 32 increase (or decrease if electricity demand is falling) all of them in proportion to their current mix.
 33 This can be the best assumption where the future energy mix development is unknown.

34 2. **Continue historical trends for the share of different technologies in the electricity mix.**
 35 Carry past sectoral trends into the future. This approach can lead to unreasonable results for
 36 longer timeframes where certain shares have experienced high growth rates in the past but are
 37 unlikely to do so in the future. Users should apply individual adjustment to account for such
 38 factors.

- 1 3. **Assume that certain technologies decrease more (or less) than others.** This approach is
2 realistic under the following conditions:
- 3 a. There is evidence that a certain technology will be more relevant in the future energy
4 system than in an alternative system. For example, a national study may forecast the
5 development of the future energy mix showing trends such as the replacement of certain
6 technologies by natural gas.
- 7 b. A country's climate strategy is leading toward the decarbonisation of the power sector. In
8 such a case, the bridge technology (such as natural gas), may be preferred over coal.
- 9 c. System characteristics changes are now favouring certain technologies over others. For
10 example, as shares of intermittent RE sources such as wind and solar become
11 increasingly significant, the energy mix shifts from being baseload-focused towards a
12 more flexible market regime, which may in turn favour certain technologies, such as
13 natural gas, over others.

14 Step 3: Calculate emission levels based on technology-specific emission factors

15 Users should apply technology-specific emission factors to the electricity generation mix to estimate the
16 emission level, using one following approaches:

- 17 1. Use future technology-specific emission factors available in national studies or other sources.
18 Unlike the emission factors described in Section 8.3, these do not change significantly in
19 response to changes in the electricity mix, so results from existing sectoral modelling exercises
20 can be used.
- 21 2. Calculate technology-specific emission factors using historic emission factors. Users can
22 calculate these emission factors using historical technology-specific emissions (tCO₂/MWh),
23 which are readily available from the IEA CO₂ Emissions from Fuel Combustion database¹⁹ or can
24 be calculated from national statistics. Future specific emissions can be derived using the following
25 approaches:
- 26 a. Assume that they remain constant, indicating that there is no improvement in the energy
27 efficiency of technologies and that the fuel composition stays the same.
- 28 b. Assume that they improve over the years, indicating that there are energy efficiency
29 improvements for the technology. However, this is only realistic where current plants will
30 be retrofitted or where the construction of more efficient plants is planned, so it is
31 important to carefully consider how probable this is.

32 Users should then apply technology-specific emission factors to each technology in the electricity
33 generation mix to calculate the emission trajectory. The emission trajectory is expressed in terms of
34 tCO₂e emitted in a given year, stated for each of the years for which the trajectory is being developed.

¹⁹ Available at: <http://www.iea.org/statistics/topics/CO2emissions/>.

1 8.2.3 Calculate GHG emission reductions (if relevant)

2 Where the objective is to estimate the GHG emission reductions of the policy, users should determine a
3 baseline scenario and estimate the associated emission trajectory. GHG emission reductions achieved by
4 the policy are the difference between the policy scenario emission trajectory and the baseline scenario
5 emission trajectory.

6 The baseline scenario emission trajectory should be estimated by following the same steps used for
7 estimating the policy scenario emission trajectory (set out in Sections 8.2.1 and 8.2.2). The same
8 approach used for the policy scenario (energy model versus method for limited data availability) should
9 be used for the baseline scenario.

10 The following should be considered when determining the baseline scenario:

- 11 • Which policies should be included and what timeframes do they have?
- 12 • Which non-policy drivers and/or sectoral trends should be included?
- 13 • How would the sector have developed without the policy? What assumptions should be made
14 regarding technologies that would have been implemented in the absence of the policy?

15 The policies covered by this guidance and/or other policies can be included in the baseline scenario. The
16 sources of data for developing assumptions on such policies may include government policies,
17 regulations and plans; forecasting models; expert interviews; and market assessment studies for supply
18 and demand projections.

19 Users should also develop assumptions on non-policy drivers and sectoral trends, including load
20 forecasts, fuel prices, grid storage capacity, renewable technology prices, population and GDP.

21 Users could consider developing multiple baselines rather than just one, each based on different
22 assumptions. This approach produces a range of possible emission reductions scenarios. Box Box 8.2
23 describes some further considerations for the development of baseline scenarios.

24 *Box 8.2: Considerations for the development of baseline scenarios*

Users should exercise caution when developing baseline scenarios. The development of baseline scenarios requires assumptions about future sectoral, economic, social and political developments, as well as assumptions about national policies. These can be difficult to predict.

It is important to note that there is an additional element of uncertainty in the development of a baseline scenario compared to the development of the policy scenario. Historically, there has been some controversy surrounding the development of baseline scenarios and the existence of incentives to overstate baseline emissions.

Conservativeness is important for baseline scenarios, since a range of possible values and probabilities exist in the development of baseline scenarios. Users may want to develop a range of possible baseline scenarios and, where necessary, use the lower end of this range.

25 The last step is to calculate the GHG emission reductions achieved by the policy. This is calculated by
26 subtracting, for the given year, the emissions level associated with the policy scenario emission trajectory
27 from the emissions level associated with the baseline scenario emission trajectory.

1 8.2.4 Example of calculating GHG impacts using emission trajectory method

2 *Box 8.3: Example of calculating GHG impacts for a feed-in tariff policy*

The country's current electricity mix is largely composed of coal-based power (4,500 GWh/year) and some natural gas (500 GWh/year). There is a large potential for solar power. The country has decided to harness its solar potential to transition to a low-carbon power sector by 2030. To this end, an uncapped feed-in tariff policy for solar power has been implemented to promote uptake of solar power.

In a first step, users estimate the implementation potential of the policy as 1,200 MW (800 MW solar power and 400 MW wind power). After assessing the policy design characteristics, this potential is reduced to only solar (800 MW). Financial factors and the barrier analysis further reduce the policy's impact to between 237 and 314 MW. This translates to the generation of between 469 and 622 GWh power in 2030, assuming annual operation for 330 days at a 25% capacity factor, using the formula:

Annual electricity generation (GWh) =

$$(Capacity (MW) * annual operating hours (h) * capacity factor of technology (%)) / 1,000$$

Officials from the Ministry of Energy are keen to understand how this RE addition affects the emission trajectory of the energy sector in the target year.

The future electricity demand in the country is estimated. Previous estimates of growth in energy demand are extrapolated to provide an estimate of future demand. Energy sector experts from national universities are consulted, and the consensus is that energy demand is expected to grow at 2% a year. At this rate, the electricity demand is close to 6,700 GWh in 2030. Of this, 546 GWh are expected to be provided by the new solar installations (average of the range resulting from the RE addition estimation). After consulting the country's energy development plans and relevant country experts, the remaining energy mix expected in 2030 is estimated to be 5,154 GWh from coal and 1,000 GWh from gas.

Next, sectoral emissions from the estimated generation mix are calculated using technology-specific emission factors from the IEA CO₂ Emissions from Fuel Combustion database (coal = 955 tCO₂e/GWh, gas = 530 tCO₂e/GWh). Assumptions on operating hours and capacity factor are the same as above. **The resulting sectoral emissions in 2030 are 5,452 MtCO₂e.**

Another request from the minister is to estimate the resulting GHG emission reductions. For this, two baseline scenarios are developed. It is assumed that the existing cohort of power plants would remain operational in 2030.

- In baseline scenario 1, preference is given to natural gas over coal. Hence, the majority of the new capacity addition is natural gas, feeding 1,900 GWh of power to the end-users. Of the remaining demand, 300 GWh comes from new coal power plants and 4,500 GWh from existing coal power plants.
- In baseline scenario 2, most of the needed new capacity addition comes from coal and generates 6,000 GWh for end-users. The remaining 700 GWh comes from existing natural gas plants and new natural gas capacity additions.

The resulting baseline emissions are estimated to be between **5,591 MtCO₂e** (baseline scenario 1)

and **6,101 MtCO₂e** (baseline scenario 2). The GHG emissions reductions achieved by the policy are calculated by subtracting the policy scenario emissions from the baseline emissions. This produces a result of **139 MtCO₂e** (baseline scenario 1) to **510 MtCO₂e** (baseline scenario 2).

8.3 Approach 2: Estimate GHG impacts using grid emission factor method

The grid emission factor method uses simple assumptions about the development of the electricity sector and can be useful for policies with a limited impact on the grid. RE technologies do not result in any direct emissions; their grid emission factor is zero.²⁰ It is assumed that the generated electricity resulting from the policy will displace carbon-intensive electricity generation and, to a certain extent, replace future carbon-intensive capacity additions. The grid emission factor reflects the emission intensity of the carbon-intensive electricity generation being displaced by the RE addition (expressed in tCO₂e/MWh).

It is a *key recommendation* to estimate the GHG impact using a grid emission factor calculated using the CDM combined margin emission factor approach or emission factor modelling. The two approaches for calculating the grid emission factor are discussed in Sections 8.3.1 and 8.3.2. For both approaches, the GHG impact of the policy is then calculated by multiplying the grid emission factor with the estimated RE addition (Section 8.3.3).

8.3.1 Calculate grid emission factor using combined margin approach

Grid emission factors have been used to assess the emission impacts of projects under the CDM and for bi- and multi-laterally funded projects. Several methods have been developed under the CDM, along with detailed guidance on the use of these emission factors. The CDM *Tool to calculate the emission factor for an electricity system*²¹ outlines a method to calculate a combined margin emission factor. The combined margin is a blended emissions factor that is based on emissions factors of existing power plants (operating margin) and on future capacity additions (build margin).

Appendix Appendix D: Overview of Combined Margin Approach provides information about using the CDM *Tool to calculate the emission factor for an electricity system*, along with related guidance and resources for country-specific emission factors.

8.3.2 Calculate grid emission factor using emission factor modelling

Emission factor modelling can be used to capture changes in the electricity grid's structure over time while capturing the impact of policies on the load characteristics of the grid.

Emission factor models use historical performance data from power plants and calculate emission factors by developing statistical models with respect to variables that impact the emission intensity of the grid. These variables include electricity export and import, trading and, to a limited extent, changes in power supply and demand. The US EPA AVERT (Avoided Emissions and Generation Tool) is an example of

²⁰ The lifetime GHG emissions caused by the construction and operation of RE installations can reasonably be excluded, as they are roughly equivalent to emissions that would be caused by the construction and operation of fossil fuel power plants.

²¹ Available at: <https://cdm.unfccc.int/methodologies/PAmethodologies/tools/am-tool-07-v5.0.pdf>.

1 such a statistical model.²² AVERT uses hourly and unit-level historical generation data, and models
 2 avoided emissions through implementation of energy efficiency or renewable energy.

3 Emission factor models are useful since they reflect variations in load and frequent changes in emissions
 4 (e.g., hourly differences) based on power plants supplying to the grid. They are especially beneficial for
 5 countries with significant power imports, as they accurately capture the emission intensity of the grid. In
 6 spite of these advantages, note that data used in these statistical models reflect historical emissions
 7 performance and do not adequately capture future changes in grid composition, infrastructure, and policy
 8 and pricing changes. Where users intend to capture these trends, projection-based energy modelling
 9 approaches, discussed in Section 8.2.1, may be more useful.

10 8.3.3 Calculate GHG emission reductions

11 The GHG emission reductions achieved by the policy are calculated by multiplying the grid emission
 12 factor with estimated RE addition estimated in Chapter 7. This is the GHG impact of the policy.

13 Where the policy involves hydro or bioenergy power plants, additional emissions may have to be
 14 subtracted to take account of CH₄ emissions associated with reservoirs and emissions associated with
 15 growing energy crops, respectively. CDM methodologies provide guidance for estimating such emissions.

16 8.3.4 Example of calculating GHG impacts using grid emission factor method

17 *Box 8.4: Example of calculating GHG impacts for a tender policy*

The country generates 500,000 GWh/year of electricity and its generation mix is comprised of 50% coal (250,000 GWh/year), 40% gas (200,000 GWh/year) and 10% hydro (50,000 GWh/year).

A tender policy for renewables is introduced which consists of three rounds of tenders with the following breakdown: 40 MW in 2017; 100 MW in 2018; 500 MW in 2019.

The tender policy is expected to contribute to a national target of 1,000 MW of RE capacity by 2025.

The implementation potential of the tender policy (640 MW) is reduced by 14% after the assessment of its design characteristics. Thus, the tender policy is expected to have 550 MW of RE deployment by 2025. This is further reduced to 450 MW after the assessment of factors that affect financial viability. A series of barriers are subsequently identified that further reduce the impact of the tender policy by 17% to 25%. Thus, the RE addition of the tender policy is estimated to be between 338 and 374 MW (42-47% lower than the maximum implementation potential).

This estimate translates to a generation potential of between 3,875 and 4,336 GWh power between 2017 and 2025, assuming 24 hours and 330 days of annual operation with a 25% capacity factor, while accounting for the yearly capacity addition.

This exercise highlights the limitations of the tender policy to achieve the RE target.

The government wants to estimate the GHG emissions reductions associated with the RE addition and chooses to use the grid emission factor approach.

²² Available at: <https://www.epa.gov/statelocalclimate/avoided-emissions-and-generation-tool-avert>.

The Ministry of Energy consults the regulatory commissions and utilities to define the spatial boundary of the grid. They decide to include both utilities and independent power producers in the spatial boundary of the grid. Power imports and exports are also included in the assessment. The operating margin and build margin of the grid are calculated. Using simple operating margin and build margin, and typical weightings used under the CDM for solar and wind ($w_{OM}:w_{BM} = 0.75:0.25$), the combined margin emission factor is calculated using the equation:

$$EF_{\{grid,CM,y\}} = EF_{\{grid,OM,y\}} * W_{\{OM,y\}} + EF_{\{grid,BM,y\}} * W_{\{BM,y\}}$$

$$EF_{\{grid,CM,y\}} = 0.82 \text{ tCO}_2\text{e/MWh}$$

The generation potential due to the RE addition is:

$$\sum EG_y = 3,875 - 4,336 \text{ GWh}$$

The estimated GHG emission reductions of the RE tender policy between 2017 and 2025 is:

$$\begin{aligned} [EF_{\{grid,CM,y\}} * \sum EG_y] &= 3,177,297 - 3,555,546 \text{ tCO}_2\text{e} \\ &= 3.18 - 3.56 \text{ MtCO}_2\text{e} \end{aligned}$$

1

2

9. ESTIMATING GHG IMPACTS EX-POST

Ex-post impact assessment is a backward-looking assessment of the GHG impacts achieved by a policy to date. The GHG impacts can be assessed during the policy implementation period or in the years after implementation. Ex-post assessment involves estimating achieved RE addition and estimating the consequential GHG impacts. In contrast to ex-ante estimates of GHG emissions, which are based on assumptions about future RE deployment, ex-post estimates of emissions are based on observed data collected during the policy implementation period. Users that are estimating ex-ante GHG impacts only can skip this chapter.

Figure 9.1: Overview of steps in the chapter



Checklist of key recommendations

- Estimate achieved RE addition using monitored values for the parameters described in the monitoring plan
- Estimate the GHG impacts of the policy over the assessment period, for each GHG source included in the GHG assessment boundary

9.1 Introduction to estimating GHG impacts ex-post

There are three main objectives to estimating GHG impacts ex-post. These are described below along with the sections of this chapter that are relevant to each.

Compare achieved RE addition with a policy cap, RE addition with a RE target, or GHG emission level to a sectoral emissions target

Users may want to compare achieved RE addition with a policy cap. A policy cap (whether integral to the policy design such as for auction policies, or set separately from the policy design such as for capped feed-in tariff policies) generally reflects the ambition or the expected amount of RE addition the policymaker is aiming to achieve. Users might also want to assess the extent to which a policy has contributed to a separate target, such as a national RE target. Lastly, users may want to compare the ex-post estimated policy scenario emissions with a sectoral target for emissions in the energy sector.

To meet these objectives, it is not necessary to develop a baseline scenario and users follow the guidance in Section 9.3.

Compare achieved RE addition or GHG emissions with a baseline scenario

Users may want to compare the achieved RE addition with what would have happened in the absence of the policy. This requires the determination of a baseline scenario, which also serves as the basis for calculating baseline emissions and GHG emission reductions.

1 Users develop a baseline scenario under which an equivalent amount of electricity is generated as in the
2 policy scenario, but from business-as-usual sources rather than via the RE addition that results from the
3 policy. All other variables (such as economic trends) are kept the same as in the policy scenario. The
4 baseline scenario is used to estimate either the GHG emission trajectory or the GHG emissions
5 reductions.

6 To meet these objectives, follow the guidance in Sections 9.2, 9.3 and 9.4.

7 Compare achieved RE addition or GHG emissions with an ex-ante assessment

8 Users may want to compare an ex-ante (expected) RE addition with achieved RE addition, to ascertain
9 whether a policy is performing in line with expectation. Likewise, they may want to compare the GHG
10 emission reductions achieved by a policy with the reductions estimated in an ex-ante assessment.

11 This can provide an indication of the impact of policy design characteristics and other factors on the RE
12 addition (i.e., the factors set out in Chapter 7). For example, if the achieved RE addition is greater than
13 the expected RE addition, this could be an indication that other policies are interacting with, or adding
14 further incentive to, the policy (e.g., where a renewable portfolio standard is achieved using a feed-in tariff
15 policy). Alternatively, if the achieved RE addition is lower than the expected RE addition, it could be that
16 other policies have counteracted the policy's intended impact or the policy may not have been as effective
17 as originally predicted.

18 This exercise can help users avoid double-counting through the aggregation of emission reductions from
19 interacting policies. It can also be used to check whether all the assumptions that were made during the
20 ex-ante assessment were correct. Lastly, comparisons between ex-ante and ex-post assessments can
21 inform subsequent improvements of ex-ante assessments. These comparisons may become part of an
22 ongoing process to refine future assessments.

23 To meet these objectives, follow the guidance below in Sections 9.3 and 9.4.

24 Considerations for the desired level of accuracy

25 When selecting methods to estimate ex-post GHG impacts, users should consider objectives, the level of
26 accuracy needed to meet stated objectives, the availability and quality of relevant data, the accessibility of
27 methods, and capacity and resources for the assessment.

28 Users can follow a low accuracy approach for their assessment, which may entail collecting aggregate
29 data on energy generation from government agencies and/or using auxiliary electricity consumption
30 emission factors based on the most common source of auxiliary generation for the country. An
31 intermediate accuracy approach may involve using clustered data on energy generation from electricity
32 purchasers or distribution companies, and/or using auxiliary electricity consumption emission factors
33 based on the most common source of auxiliary generation within the regions where the clusters are
34 located. A high accuracy approach can involve using disaggregated metered data on electricity imports
35 and exports, and disaggregated fuel consumption data for auxiliary generation.

36 9.2 Estimate or update baseline emissions

37 To estimate the GHG emission reductions achieved by the policy, baseline emissions need to be
38 estimated. Baseline emissions should be recalculated each time an ex-post assessment is undertaken. If
39 using the emission trajectory method, update the baseline emissions by following the steps in Section

1 8.2.3. If using the grid emission factor, this step is skipped (emission reductions are estimated based
2 upon the RE addition and updated grid emission factor, in Section 9.4).

3 9.3 Estimate achieved RE addition

4 It is a *key recommendation* to estimate achieved RE addition using monitored values for the parameters
5 described in the monitoring plan. This achieved RE addition can be estimated in terms of RE capacity
6 addition or RE electricity generation addition. Two main parameters to monitor are *installed RE capacity*
7 *(MW)* and *net electricity supplied to the grid from RE (EG)*. Further guidance on indicators, parameters
8 and monitoring plans is provided in Chapter 10.

9 Where users have no, or limited, monitored data for the policy, the achieved RE addition may have to be
10 estimated using the best data available. See the considerations for the desired level of accuracy in
11 Section 9.1 for further guidance on choosing an approach.

12 9.4 Estimate GHG impacts

13 The achieved RE addition should be translated into GHG impacts by following the guidance set out in
14 Chapter 8, using monitored (rather than projected) data. Chapter 10 lists all the relevant indicators and
15 parameters for which data should be gathered to translate achieved RE addition into ex-post GHG
16 impacts.

17 It is a *key recommendation* to estimate the GHG impacts of the policy over the assessment period, for
18 each GHG source included in the GHG assessment boundary. For the emission trajectory method,
19 calculate the GHG impacts of the policy by subtracting baseline emissions (estimated in Section 9.2) from
20 the ex-post policy scenario emissions for each source category included in the GHG assessment
21 boundary.

22 For the grid emission factor method, calculate the GHG impacts of the policy by multiplying the updated
23 grid emission factor by the RE addition (expressed in terms of GWh).

24

PART IV: MONITORING AND REPORTING

10. MONITORING PERFORMANCE OVER TIME

Monitoring allows the user to collect the information needed for the quantification of the GHG impact during or after policy implementation. This chapter provides guidance on monitoring the performance of policies during the implementation period and collecting data for estimating RE addition and GHG impacts ex-post. Users estimating GHG impacts ex-ante without monitoring performance can skip this chapter.

Figure 10.1: Overview of steps in the chapter



Checklist of key recommendations

- Create a plan for monitoring key performance indicators and parameters
- Identify the key performance indicators that will be used to track performance of the policy over time and define the parameters necessary to estimate GHG emissions ex-post
- Monitor each of the indicators and parameters over time, in accordance with the monitoring plan

10.1 Create a monitoring plan

Monitoring during the policy implementation period serves two objectives:

- **To evaluate the performance of the policy:** Monitor trends in performance parameters to understand whether the policy is on track and being implemented as planned
- **To estimate GHG impacts:** Collect the data needed for ex-post assessment of GHG impacts

A monitoring plan is important to ensure that the necessary data are collected and analysed. It is a *key recommendation* to create a plan for monitoring key performance indicators and parameters. Where feasible, users should develop the monitoring plan during the policy design phase (before implementation) rather than after the policy has been designed and implemented.

Monitoring period

The monitoring period is the time period over which the policy is monitored. At minimum, it should include the policy implementation period, but it is also useful if the period covers pre-policy monitoring of relevant activities prior to the implementation of the policy and post-policy monitoring of relevant activities after the implementation period. Depending on the indicators being monitored, it may be necessary to monitor some indicators over different time periods than others.

Users should strive to align the monitoring period with those of other assessments being conducted using other ICAT guidance documents. For example, if assessing sustainable development impacts using the

1 ICAT *Sustainable Development Guidance* in addition to assessing GHG impacts, the monitoring periods
2 should be the same.

3 Institutional arrangements for coordinated monitoring

4 Information on key performance indicators and parameters can be dispersed among a number of different
5 institutions. Given the wide variety of data needed for impact assessment and a range of different
6 stakeholders involved, strong institutional arrangements serve an important function. They play a central
7 role in coordinating monitoring. A technical coordinator, coordinating team or body is often assigned to
8 lead MRV processes in which responsibilities have been delegated to different institutions. Since data can
9 be widely dispersed between institutions, the coordinating body oversees the procedures for data
10 collection, management and reporting.

11 Countries may already have institutions in place as part of the national MRV system. Where this is the
12 case, users can consider expanding the national MRV system to also monitor the impact of the policy.
13 Where strong institutional arrangements do not yet exist, countries can determine the governmental body
14 with the adequate capacity and authority to be responsible for the MRV system and to establish the
15 necessary legal arrangements. Institutional mandates help to strengthen the procedures and the system,
16 and may also help secure funding from the government to ensure the continuity of the process. Users can
17 refer to the UNFCCC *Toolkit on Establishing Institutional Arrangements for National Communications and*
18 *Biennial Update Reports*, as well as other sources, for support on establishing or improving the
19 institutional arrangements for a robust MRV system.²³

20 Considerations for a robust monitoring plan

21 To ensure that the monitoring plan is robust, consider including the following elements in the plan.

- 22 • **Roles and responsibilities:** Identify the entity or person that is responsible for monitoring key
23 performance indicators and parameters, and clarify the roles and responsibilities of the personnel
24 conducting the monitoring.
- 25 • **Competencies:** Include information about any required competencies and any training needed to
26 ensure that personnel have necessary skills.
- 27 • **Methods:** Explain the methods for generating, storing, collating and reporting data on monitored
28 parameters.
- 29 • **Frequency:** Key performance indicators and parameters can be monitored at various
30 frequencies, such as monthly, quarterly or annually. Determine the appropriate frequency of
31 monitoring based on the needs of decision makers and stakeholders, cost and data availability. In
32 general, the more frequent that data is collected, the more robust the assessment will be.
33 Frequency of monitoring can be consistent with measurement conducted under the national MRV
34 system.

²³ Available at: http://unfccc.int/files/national_reports/non-annex_i_natcom/training_material/methodological_documents/application/pdf/unfccc_mda-toolkit_131108_ly.pdf.

- 1 • **Collecting and managing data:** Identify the databases, tools or software systems that are used
2 for collecting and managing data and information.
- 3 • **Quality assurance and quality control (QA/QC):** Define the methods for QA/QC to ensure the
4 quality of data enhance the confidence of the assessment results. Quality assurance is a planned
5 review process conducted by personnel who are not directly involved in the data collection and
6 processing. Quality control is a procedure or routine set of steps that are performed by the
7 personnel compiling the data to ensure the quality of the data.
- 8 • **Record keeping and internal documentation:** Define procedures for clearly documenting the
9 procedures and approaches for data collection as well as the data and information collected. This
10 information is beneficial for improving the availability of information for subsequent monitoring
11 events, documenting improvements over time and creating a robust historical record for archiving.

12 10.2 Monitor indicators and parameters over time

13 To estimate RE addition and GHG impacts ex-post, users collect data on a broader range of indicators
14 and parameters to be monitored during the implementation period. A key performance indicator is a
15 metric that indicates the performance of the policy. A parameter is a variable such as activity data or an
16 emission factor that is needed to estimate emissions.

17 It is a *key recommendation* to identify the key performance indicators that will be used to track
18 performance of the policy over time and define the parameters necessary to estimate GHG emissions ex-
19 post. The selection of indicators and parameters should be tailored to the policy, the needs of
20 stakeholders, the availability of existing data and the cost of collecting data. Table 10.1 provides example
21 key performance indicators for the types of policies covered by this guidance, while Table Table 10.2
22 provides example parameters. Users should adapt the indicators and parameters as needed for the
23 specific polices being assessed.

24 It is a *key recommendation* to monitor each of the indicators and parameters over time, in accordance
25 with the monitoring plan. The frequency of monitoring is dependent on stakeholder resources, data
26 availability, feasibility, and the uncertainty requirement of reporting or estimation needs. The monitoring
27 plan should include an iterative process for balancing these dependencies. Where monitoring indicates
28 that the assumptions used in the ex-ante assessment are no longer valid, users should document the
29 difference and account for the monitored results when updating ex-ante estimates or when estimating ex-
30 post GHG impacts.

31 *Table 10.1: Example key performance indicators for RE policies*

Key performance indicators	Definition	Example key performance indicators
Inputs	Resources that go into implementing a policy	<ul style="list-style-type: none"> • Financial resources for implementing and administering the policy

<p>Activities intermediate effects</p>	<p>Activity: Administrative activities involved in implementing the policy</p> <p>Intermediate effects: Changes in behaviour, technology, processes or practices</p>	<ul style="list-style-type: none"> • Level of tariff or premium by technology or installation, etc. (<i>feed-in tariff policy, auction policy</i>) • Sum of tariff or premium payments (<i>feed-in tariff policy, auction policy</i>) • Amount capacity auctioned vs. installed (<i>auctions</i>) • Sum of tax deductions given to end user (<i>tax incentive policy</i>) • Share of installations that achieve tax breaks (<i>tax incentive policy</i>) • Funds collected (<i>tax incentive policy</i>) • Capacity utilisation factor of RE installations (<i>all policies</i>) • Share of RE plants by stage: planned, under construction, operational (<i>all policies</i>)
<p>Sustainable development impacts</p>	<p>Changes in relevant environmental, social or economic conditions that result from the policy</p>	<ul style="list-style-type: none"> • Cost savings achieved (<i>all policies</i>) • Employment generated (<i>all policies</i>) • Number of households with reduced energy costs (<i>all policies</i>) • Number of new business and/or investment opportunities (<i>all policies</i>) • Air quality (<i>all policies</i>)

1 Table 10.2: Example parameters for estimating the GHG impacts of RE policies

Parameter and unit	Potential sources of data	Parameter type	Suggested monitoring frequency
General			
Installed RE capacity (MW)	Monitoring reports and surveys; installation registers by federal energy agencies	Measured	Monthly/annual
Net electricity supplied to the electricity grid from RE (EG)	Meter readings taken jointly by grid utility and power producer representatives	Calculated as the difference of quantity of electricity exported to the grid and the quantity of electricity imported from the grid as measured by electronic energy meters at the grid delivery point	Continuous measurement; monthly recording
Emission trajectory method			
Electricity mix (in GWh per	Monitoring reports and surveys; installation	Measured	Monthly/annual

technology)	registers by federal energy agencies; electricity market regulator		
Technology-specific emissions factors	National studies or other relevant sources	Calculated for each fuel source and/or type of technology	Annual
Grid emission factor method			
Grid emission factor (tCO ₂ e/MWh)	National statistics for grid connected power plants	Calculated as the combination of OM and build margin (BM) by applying suitable weights	Most recent three years of data is used to recalculate operating margin (OM) every year
Operating Margin (OM)	National statistics for grid connected power plants	Calculated using methods specified in tools such as the CDM <i>Tool to calculate the emission factor for an electricity system</i>	Most recent three years of data is used to recalculate OM every year
Build Margin (BM)	National energy strategies, national energy modelling, utility investment plans/permitting documents	Calculated using methods specified in tools such as the CDM <i>Tool to calculate the emission factor for an electricity system</i>	Most recent year data is used to recalculate BM every year

1
2

1 11. REPORTING

2 *Reporting the results, methodology and assumptions used is important to ensure the impact assessment*
 3 *is transparent and gives decision-makers and stakeholders the information they need to properly interpret*
 4 *the results. This chapter provides a list of information that is recommended for inclusion in an assessment*
 5 *report.*

6 Checklist of key recommendations

- Report information about the assessment process and the GHG impacts resulting from the policy (including the information listed in Section 11.1)

7 11.1 Recommended information to report

8 It is a *key recommendation* to report information about the assessment process and the GHG impacts
 9 resulting from the policy (including the information listed below). For guidance on providing information to
 10 stakeholders, refer to the *ICAT Stakeholder Participation Guidance* (Chapter 7).

11 General information

- 12 • The name of the policy assessed
- 13 • The person(s)/organisation(s) that did the assessment
- 14 • The date of the assessment
- 15 • Whether the assessment is an update of a previous assessment, and if so, links to any previous
 16 assessments

17 Chapter 2: Objectives of Assessing the GHG Impacts of RE Policies

- 18 • The objective(s) and intended audience(s) of the assessment

19 Chapter 3: Steps and Assessment Principles

- 20 • Opportunities for stakeholders to participate in the assessment

21 Chapter 5: Describing the RE Policy

- 22 • A description of the policy, including the recommended information in Table Table 5.1. Whether
 23 the assessment applies to an individual policy or a package of related policies, and if a package
 24 is assessed, which policies are included in the package.
- 25 • Whether the assessment is ex-ante, ex-post, or a combination of ex-ante and ex-post

26 Chapter 6: Identifying Impacts: How RE Policies Reduce GHG Emissions

- 27 • If identifying GHG impacts (Section 6.1), a list of all GHG sources of the policy identified, using a
 28 causal chain, showing which impacts are included in the GHG assessment boundary
- 29 • A list of potential GHG impacts that are excluded from the GHG assessment boundary with
 30 justification for their exclusion

- The assessment period

Chapter 7: Estimating RE Addition of the Policy Ex-Ante

- An estimate of the maximum implementation potential that the policy is expected to achieve
- A refined estimate after accounting for policy design characteristics
- A refined estimate after accounting for factors that affect the financial feasibility of RE technologies
- A refined estimate after accounting for other barriers (Table Table 11.1 provides a sample template for this barrier analysis)
- The estimated RE addition of the policy upon completion of the steps in Sections 7.1 to 7.5
- The method or approach used to assess uncertainty
- An estimate or description of the uncertainty and/or sensitivity of the results in order to help users of the information properly interpret the results

Table 11.1: Sample template for barrier analysis

Step 1		Step 2	Step 3	Step 4		
Barrier category	Barrier description	Severity of barrier	Other policies addressing barrier	Impact factor	General level/ Technology level	Overlap with other barrier(s)
<i>Specify the overarching barrier category</i>	<i>Describe the specific barrier and explain how the barrier may affect the policy</i>	<i>Provide severity of the barrier on a scale from 1 to 5.</i>	<i>Provide analysis on whether other existing policies may help to overcome this barrier</i>	<i>Provide the effect of the barrier on the implementation potential of the policy. The implementation potential can also be provided with an uncertainty range.</i>	<i>Specify whether the impact factor applies on a general level or a technology-specific level</i>	<i>Provide analysis on whether and to what extent the barrier overlaps with other existing barriers</i>

Chapter 8: Estimating the GHG Impacts of the RE Policy Ex-Ante

- The method chosen, Approach 1 or Approach 2, for estimating GHG impacts based on the objectives of the assessment, and the policy’s expected impact and timeframe
- Where using Approach 1
 - An estimate of the emission trajectory using an energy model, or determined using the method for limited data availability
 - The calculated GHG emissions reductions (if relevant)
- Where using Approach 2:

- 1 ○ An estimate of the grid emission factor using the Combined Margin approach or using
- 2 emission factor modelling
- 3 ○ The calculated GHG emission reductions
- 4 • Any methodologies and assumptions used to estimate GHG emissions reductions, including any
- 5 models used
- 6 • All sources of data used to estimate GHG emissions reductions, including activity data, emission
- 7 factors and assumptions
- 8 • The method or approach used to assess uncertainty
- 9 • An estimate or description of the uncertainty and/or sensitivity of the results in order to help users
- 10 of the information properly interpret the results

11 Chapter 9: Estimating GHG Impacts Ex-Post

- 12 • An estimate of the achieved RE addition using monitored values for the indicators and
- 13 parameters described in the monitoring plan
- 14 • Total annual and cumulative policy scenario emissions and removals over the GHG assessment
- 15 period
- 16 • The methodology and assumptions used to estimate policy scenario emissions, including the
- 17 emissions estimation methods (including any models) used
- 18 • The ex-post GHG impact estimate calculated using the emission trajectory method or the grid
- 19 emission factor method
- 20 • The method or approach used to assess uncertainty
- 21 • An estimate or description of the uncertainty and/or sensitivity of the results in order to help users
- 22 of the information properly interpret the results

23 Chapter 11: Monitoring Performance over Time

- 24 • A list of the key performance indicators used to track performance over time and the rationale for
- 25 their selection
- 26 • Sources of key performance indicator data and monitoring frequency

27 Additional information to report (if relevant)

- 28 • The type of technical review undertaken (first-, second-, or third-party), the qualifications of the
- 29 reviewers and the review conclusions. More guidance on reporting information related to
- 30 technical review is provided in Chapter 9 of the *Technical Review Guidance*.

1 APPENDIX A: CALCULATION OF LCOE FOR RE SOURCES

2 The LCOE is the unique cost price of the outputs of an energy project that makes the present value of the
3 revenues equal to the present value of the costs over the lifetime of the project. It is often used as a proxy
4 for the average price that an energy project must receive in a market to break even over its lifetime.

5 Section 7.4.2 provides guidance on estimating the financial feasibility of technologies using the LCOE.

6 This appendix provides the equation for LCOE for renewable energy sources in Equation A.1. Table A.1
7 provides the input parameters and units for the calculation of the project LCOE. The input parameters for
8 the LCOE calculation below are specified for the biomass CHP technology example provided in Figure
9 Figure 7.1 in Section 7.4.2.

10 *Equation A.1: LCOE for renewable energy sources*

$$11 \text{ LCOE} = \frac{\alpha * I_t + FOM + F_T}{E_{El}} + VOM - REV$$

12 Where:

- 13 • $\alpha = \frac{WACC}{1 - (1 + WACC)^{-LP}}$
- 14 • $I_t = \frac{C_t}{L_C} \sum_{t=1}^{L_C} (1 + i_C)^t$
- 15 • $C_t = C_0 * X^{-E}$
- 16 • $F_T = (\sum_{n=1}^{\#fuels} (\%_{0n} * F_n))$
- 17 • $E_{El} = FLH_{El} * P_{El}$

18 Only applicable to biomass CHP

- 19 • $REV = HP * \frac{\eta_H}{\eta_E}$
- 20 • $H = P_{El} * \frac{\eta_H}{\eta_E} * FLH_{El}$
- 21 • $F_T = (\sum_{n=1}^{\#fuels} (\%_{0n} * F_n)) * \frac{E_{El} + H}{\eta_E + \eta_H}$

22 *Table A.1: Input parameters and description for the calculation of the project LCOE*

Input parameter	Description	Unit
I_t	Investment cost at point t in time	USD
α	Capital recovery factor	1/a
FOM	Fixed Operational and Maintenance costs	USD/a
VOM	Variable Operational and Maintenance costs	USD/kWh
WACC	Weighted average cost of capital	%

$\%_n$	Share of fuel n in total fuel feed stock	%
F_n	Fuel costs of fuel n	USD/a
F_T	Total fuel costs	USD/a
REV	Revenue generated through heat production	USD/a
LP	Project lifetime	A
C_t	Capital “overnight” costs at point t in time	USD
LC	Construction time	A
E	Experience parameter	-
C_0	Capital “overnight” costs in year 0	USD
X	Cumulative capacity installed in year t	MW

1

2

3

1 APPENDIX B: CALCULATION OF THE WEIGHTED AVERAGE COSTS 2 OF CAPITAL

3 The WACC is the rate a company is expected to pay on average to compensate all of its investors. This
4 calculation captures three different forms of project finance for RE projects: equity, private debt financing
5 and public debt financing. Section 7.4.1 addresses use of the WACC in financial feasibility calculations.

6 The equation for the WACC is provided in Equation B.1. Table B.1 provides the input parameters and
7 assumptions to calculate the WACC.

8 *Equation B.1: WACC*

$$9 \quad ACC = \%_{equity} * o_{equity} + \%_{private} * i_{private} + \%_{public} * i_{public}$$

$$10 \quad i_{private} = \frac{C_{private}}{(R_{Gross,private} - L_{ann,private})}$$

$$11 \quad R_{Gross,private} = R_{Gross,total} - R_{Gross,public}$$

$$12 \quad R_{Gross,total} = IRR * C_{Total}$$

$$13 \quad R_{Gross,public} = i_{public} * C_{public}$$

$$14 \quad L_{ann,private} = \frac{\%_{loan\ lost}}{T_{Loan}} * C_{Total} * \%_{loss,private}$$

$$15 \quad C_{Total} = C_{public} + C_{private}$$

16 *Table B.1: Assumptions in the calculation of the weighted average cost of capital (WACC)*

Input parameter	Description	Unit
$\%_{equity}$	Share of equity financing of total	%
o_{equity}	Opportunity costs/required return equity financing	%
$\%_{private}$	Share of private debt financing	%
$i_{private}$	Rate of return / interest rate private debt finance	%
$\%_{public}$	Share of private debt financing	%
i_{public}	Rate of return / interest rate public debt financing	%
$C_{private}$	Contribution by private banks	USD
C_{public}	Contribution by public banks	USD
C_{Total}	Total debt financing contribution	USD
$L_{ann,private}$	Annualised losses for private debt	USD
$R_{Gross,private}$	Gross revenue private debt financing	USD

$R_{Gross, total}$	Gross revenue debt financing	USD
$R_{Gross, public}$	Gross revenue public financing	USD
IRR	Internal Rate of Return	%
$\%_{loan\ lost}$	Rate of loans lost	%
T_{Loan}	Tenor of the loan	Years
$\%_{loss, private}$	Share of loan lost allocated to the private debt	%

1

2

3

APPENDIX C: EXAMPLE RE POLICIES

This appendix provides example of RE policies from a number of countries, and case studies of RE policies from the literature. This information is provided particularly in support of a benchmarking exercise users can choose to undertake after calculating RE addition.

Table C.1: Example feed-in tariff policies

Country	Main design characteristics	Main barriers and challenges	Achieved impact
<p>United Kingdom (UK Department of Energy and Climate Change 2015) FiT introduced in 2010.</p>	<ul style="list-style-type: none"> Technologies eligible are solar PV, onshore wind, hydropower, anaerobic digestion (AD) and micro combined heat and power (micro CHP) Tariff differentiation with higher tariffs for less mature technologies and small-scale installations Tariffs were set to give rates of return between 5-8% 	<ul style="list-style-type: none"> Regulatory and policy uncertainty barrier: Policy risk and uncertainty, result from changing policies and financial support policies (RE Association 2015, p.64). Some of these changes include large digressions in the FiT and impending solar FiT review (European Forum for RE Sources 2015). Lack of awareness and skilled personnel: Deficient number of skilled workers for the installation of microgeneration technologies (Aaskov & Tallat-Kelpšaitė 2015). Institutional and administrative barrier: The objectives of Ofgem (UK's independent national energy regulator) are not aligned with national and European RE and green economic objectives (Aaskov & Tallat-Kelpšaitė 2015). Policy design challenge: Problems with FiT cost control mechanism for small scale anaerobic digestion exist. Policy design challenge: The financial support for FiT technologies is unbalanced. While there is adequate support for PV, other technologies do not receive enough support to encourage similar investments (Aaskov & Tallat-Kelpšaitė 2015). 	<ul style="list-style-type: none"> 3,567.40 MW of installed RE capacity over period of operation from 04/2010 until 03/2015 with total of 682,511 installations PV accounts for 83.46% of all installed capacity and wind accounts for 11.47% of all installed capacity
<p>Algeria (Nganga et al. 2013) FiT introduced in 2004 (Meyer-Renschhausen 2013); 2014 for PV (PwC & Eversheds 2016)</p>	<ul style="list-style-type: none"> All RE technologies eligible Tariff differentiation with tariff premiums ranging between 80% to 300% Government-owned single buyer with guaranteed purchase up to the annual production quota FITs are offered over a project's 	<ul style="list-style-type: none"> Market barrier: Significant subsidies available for conventional energy sources that reduce the price for all consumers Regulatory and policy uncertainty barrier: Regulatory obstacles Financial barrier: Lack of available capital (BETTER 2013) Institutional and administrative barrier: Regulatory and bureaucratic uncertainty and inefficiency (BETTER 2013) Policy design challenge: Insufficient level and variability of tariffs 	<ul style="list-style-type: none"> No single project has become operational as of 02/2013

	lifetime		
<p>Tanzania (Nganga et al. 2013) FiT introduced in 2009 (Bank & Weischer 2012a)</p>	<ul style="list-style-type: none"> Eligible projects are restricted to be at least 100 kW and export no more than 10MW No differentiation based on technology, size, fuel type, or application, but depending on whether the SPP is grid-connected or mini-grid Payment duration of 15 years 100% of energy purchased by utility and IPPs 	<ul style="list-style-type: none"> Financial barrier: Solvency of state-owned utility TANESCO Infrastructure barrier: Under-developed grid and problems with grid stability Financial barrier: Low-interest financing as key challenge for SPP developers (with interest rates in the range of 12-15% and payback periods of only 7-10 years as of 02/2013) Regulatory and policy uncertainty barrier: Complicated regulatory requirements coordinated by several agencies (Bank & Weischer 2012b). Lack of awareness and skilled personnel: Lack of experience in RE projects. Lack of confidence among stakeholders due to inexperience. Public acceptance and environmental barrier: Conflicts over land ownership and water rights (Bank & Weischer 2012b). 	<ul style="list-style-type: none"> 24.4 MW of newly developed capacity as of 02/2013 Additional 60 projects of a combined 130 MW in the pipeline as of 02/2013
<p>Thailand (Beerepoot et al. 2013; ADB 2015) Feed-in Premium introduced in 2007, revised in 2009; Solar FiT in 2013 (Tongsopit 2014)</p>	<ul style="list-style-type: none"> Technologies eligible are biomass, biogas, municipal solid waste, wind, mini- and micro-hydropower, and solar, however, suspended the purchase of solar energy through the adder program Adder rates for RE are differentiated by technology capacity, location, and use as diesel replacement and installed capacity 100% energy purchased by Thai power utilities (EGAT, PEA and MEA) Projects are eligible for support for 7 to 10 years FiT programme for solar (Tongsopit 2014) 	<ul style="list-style-type: none"> Regulatory and policy uncertainty barrier: Weak regulation and lack of transparency (Tongsopit & Greacen 2012; Pacudan 2014). Conflicting laws (Chaianong & Pharino 2015). Uncertainty over future policy (Tongsopit 2014). Techno-economic barrier: Technical barriers including severe energy shortages (Chaianong & Pharino 2015) Public acceptance and environmental barrier: Lack of public discourse (Tongsopit & Greacen 2012) Lack of awareness and skilled personnel: Limited number of skilled workforce in various technologies (Sawangphol & Pharino 2011). Lack of domestic production of PV and wind (Chaianong & Pharino 2015) Market barrier: High capital investment, especially for PV (break-even point of 7-9 years). Fluctuation of fossil fuel price (Sawangphol & Pharino 2011). Institutional and administrative barrier: Lack of coordination among implementing bodies (Pacudan 2014). Complex permitting process (Tongsopit 2014) Policy design challenge: Planning barriers (Tongsopit & Greacen 2012) Market barrier: Absence of consumer's demand (Tongsopit & Greacen 2012) 	<ul style="list-style-type: none"> 215.66 MW of installed capacity for rooftop solar PV as of 2012 (Chaianong & Pharino 2015)

<p>Uruguay (IRENA 2015e)</p> <p>Only feed-in tariff policy for biomass in 2010 reviewed in this overview, however, not hybrid FiT/net metering policy for microgeneration in 2010 and hybrid policy of feed-in tariff and auction for PV in 2013 (Glemarec et al. 2012).</p>	<ul style="list-style-type: none"> • Only eligible technology is biomass • Production capacity up to 20MW (Government of Uruguay 2010) • Payment duration of up to 20 years 	<ul style="list-style-type: none"> • Institutional and administrative barriers: Significant barriers in licencing process for wind (Glemarec et al. 2012). Lack of experience in issuing permits for micro hydro (Terra & Schenzer 2014). Absence of a regulated tariff for cogeneration as of 2012 (Garmendia 2012). 	<ul style="list-style-type: none"> • While the initial proposals received under the feed-in tariff totalled 354MW of capacity, as of late 2014 there were only 0.6MW installed with 43MW in the pipeline (IRENA 2015e).
--	--	---	--

Table C.2: Example auctions and tender policies

Country	Main design characteristics	Main barriers and challenges	Achieved impact
<p>Brazil (IRENA 2013; IRENA 2015d)</p> <p>Laws adopted in 2004.</p>	<ul style="list-style-type: none"> • Auctions for wind, solar, small-scale hydro, large-scale hydro as well as conventional power sources • Projects contracted in auction required to start delivery after 3-5 years • PPAs are typically secured for 30 years for hydro and 20 years for wind and biomass • 100% of the energy is bought in competitive bids with guaranteed revenue for generators • Several pre-requisites for bidders to participate in bidding process • Bidders have to deposit several guarantees incl. a bid bond of 1% of project's investment cost and a project completion bond of 5% of project's investment cost. 	<ul style="list-style-type: none"> • Institutional and administrative barrier: Difficulty in financing and problems getting environmental permits approved. • Infrastructure barrier: Problems accessing the grid that lead to delays (Förster & Amazo 2015). • Policy design challenge: The hybrid system of auctioning may allow for the 'winner's phenomenon' where bidders underbid to win the auction and ultimately undergo economic losses (IRENA 2015a). • Policy design challenge: The auctioning process may last too long (IRENA 2015a). 	<ul style="list-style-type: none"> • Total of 62 GW have been contracted through 25 auctions for new capacity including 9 GW RE-based electricity generation auctions between 2005-2013 • 443 new generation projects for all technologies including conventional power with 60% renewables (40% large scale hydro and 20% other RE)

	<ul style="list-style-type: none"> • Additional reserve energy auctions 		
<p>China (IRENA 2013)</p> <p>Auctions between 2003 and 2007 (IRENA 2013)</p>	<ul style="list-style-type: none"> • Auctions for wind onshore and offshore, solar PV and CSP • Selection in one stage based on price (following the 'lowest price wins' criterion) or weighted score from price and local content • Duration of tariff is 25 years for onshore wind and 30 years for offshore wind (including 4 years construction period) • No specific compliance rules nor clear penalties for non-compliance 	<ul style="list-style-type: none"> • Market barrier: Information errors during the first and second bidding rounds that presented risks for bidders (Förster & Wigand 2016a). • Lack of awareness and skilled personnel: Lack of experience by bidders (Förster & Wigand 2016b). Lack of sufficiently stringent procedures to qualify bidders (Azuela et al. 2014). • Regulatory and policy uncertainty barrier: Conflicting policies and absence of penalties (Förster & Wigand 2016b). Lack of clear compliance rules such as ex-post change of location and Investment uncertainty (Held et al. 2014). • Institutional and administrative barrier: Lack of coordination between the auction organiser and the State Oceanic Administration (responsible for management of sea areas) (Azuela et al. 2014b). 	<ul style="list-style-type: none"> • Total of 8.64 GW of capacity contracted between 2003 and 2011 (7.3 GW of onshore wind; 10 MW of solar PV; 280 MW of CSP; 1.0 GW of offshore wind) (IRENA 2013)
<p>Morocco (IRENA 2013)</p> <p>Tendering of hydro projects since 1960, legislation revised in 2010. Wind projects tendered since 1998 (Ecofys 2013).</p>	<ul style="list-style-type: none"> • Technology-specific auctions for wind onshore, hydro and solar CSP in designated locations and for maximum capacity installed • Selection process with pre-qualification phase (experience, financial, technical capacity) and evaluation phase (technical specifications, financial aspects, industrial integration) • Duration of tariff is 20 years for wind and 25 years for solar • Penalties for delay and underperformance determined in PPA, guarantee paid at signature of PPA and termination of PPA as last resort 	<ul style="list-style-type: none"> • Institutional and administrative barriers: Complex tendering system that includes the involvement of five international financing institutions with different sets of procurement rules and processes (Ecofys 2013b). The tendering process is long and the implementation of the requirements is still unclear (Ecofys 2013). • Regulatory and policy uncertainty barriers: Details for contracting projects are not transparent to the public (Ecofys 2013). • Infrastructure barriers: Issues with integrating renewable power on to the transmission grid system (Currie et al. 2016). • Overcoming potential barrier: Stable political and regulatory environment and Morocco's experience with IPPs essential in attracting investors. • Overcoming potential barrier: Establishment of governing agency for solar energy (MASEN) was instrumental in the successful management of CSP solar auction. • Overcoming potential barrier: Adoption of the PPP model was crucial in de-risking the large-scale projects. 	<ul style="list-style-type: none"> • Total of 310 MW of RE capacity contracted between 2011 and 2012 (150 MW of wind; 160 MW of solar) • In March 2016, Morocco tendered a total of 850MW of wind energy capacity to be installed on five wind farms (Reuters 2016)

<p>Peru (IRENA 2013)</p> <p>Start of auctioning scheme in 2009 (IRENA 2015a).</p>	<ul style="list-style-type: none"> • Technology-specific auctions targeting solar, biomass and waste, wind, small hydro and geothermal • Selection in one round without a prequalification phase based on price and quota of energy (with ceiling price) • Duration of tariff for 20 years (in form of a PPA) • Use of performance bonds deposited by the project developers in order to secure completion of projects • Compliance with volume of energy generation contracted is ensured by penalising shortages • Almost no administrative barriers due to high bidding guarantees pre-qualification requirements (GIZ 2015) 	<ul style="list-style-type: none"> • Market barrier: Gas powered plants have preference over hydropower plants through tax incentives (IRENA 2012). • Institutional and administrative barrier: Environmental Impact Assessment for hydro can be a hurdle (IRENA 2012). Problems with environmental permits and agreement with local people exist. The low level of technical barriers to participate in the auctions increases the risk of delays and non-execution (Ecofys 2013). • Lack of awareness and skilled personnel: Feasibility studies, technical knowledge and a comprehensive legal framework are missing for geothermal (IRENA 2012). • Regulatory and policy uncertainty barrier: Access to finance for RE projects is unregulated (Ecofys 2013). 	<ul style="list-style-type: none"> • Total of 639 MW of RE capacity contracted between 2009-2011 across 36 projects (142 MW in wind, 80 MW in solar; 23 MW in biomass, 4 MW in biomass and 180 MW small-hydro) • 236 MW of capacity operated as of 12/2012 (GIZ 2015) • Cumulative capacity for solar 184.5MW as of 07/2016 (SolarPower Europe 2016)
<p>South Africa (IRENA 2013)</p> <p>The RE Independent Power Producer Procurement, REIPPP, was introduced in 08/2011, last round in 2014 and planned auctions for 2016.</p>	<ul style="list-style-type: none"> • Technology-specific volume targeted across 5 auctions • Selection process with 1st phase (bidders have to meet minimum criteria related to legal, financial, technical and environmental requirements) and 2nd phase (price 70%, economic development including local content 30%) • Duration of tariff is 20 years • Contracts terminated for bidders who fail to meet their commitment under the PPA • Current technologies considered within the PPA program are onshore wind, CSP, 	<ul style="list-style-type: none"> • Institutional and administrative barrier: Auction process complex and not automatised. External transaction advisers are needed (Eberhard et al. 2014). Administrative hurdles (IRENA 2013). • Lack of awareness and skilled personnel: Little provision of local capacity building and knowledge transfer (IRENA 2013). • Financial barrier: High transaction costs for both the government and bidders (Eberhard et al. 2014b). • Financial barrier: Eskom is the grid operator and single buyer which makes developers vulnerable to its responses (Ecofys 2013). • Policy design challenge: As of 08/2012 there were no successful bids for biomass, biogas and landfill gas technologies possibly attributed to low price ceilings (IRENA 2013). • Policy design challenge: Short time 	<ul style="list-style-type: none"> • Total of 2.46 GW of RE capacity contracted between 2011-2013 of 5.93 GW auctioned over the same period (1.2 GW of onshore wind, 200 MW of CSP, 1.05 GW of solar PV, 14.3 of small hydro) • Cumulative capacity of solar 1,048MW as of 07/2016 (SolarPower Europe 2016) • By end of 06/2015, 1,860 MW of procured capacity had already started operations (960MW solar PV, 790 MW onshore

	solar PV, small hydro, biomass, biogas, landfill gas and co-generation from agricultural waste of by-products (del Río 2015)	spans between auctions may negatively affect competition (del Río 2015).	wind, 100Mw CSP and 10MW hydro (del Río 2015)
--	--	--	---

Table C.3: Example tax incentive policies

Country	Main design characteristics	Main barriers and challenges	Achieved impact
Argentina (IRENA 2015c) Law 25.019 Art. 3 enacted 09/1998 for solar and wind (Government of Argentina 1998); Law 26.190 art 9 enacted 12/2006 (Argentina 2006) incl. decree 562/2009 (incl. wind, solar, geothermal, tidal, hydraulic, biomass, landfill gas, purification gas and biogas); Law 27.191 Arts 3&4 10/2015 (amendment to law 26.190) (Government of Argentina 2015) Law 26.334 01/2008 for biofuels	<ul style="list-style-type: none"> Available technologies are wind, solar geothermal, tidal, small hydro, biomass, landfill gas, purification gas and biogas (ClimateScope 2015a) At national level: <ul style="list-style-type: none"> Accelerated income tax depreciation Value-added tax (VAT) rebate: 15-year VAT deferral from capital investments in wind and solar equipment (from enactment of law 25.019) At provincial/local level (KPMG 2012; IRENA 2015c): <ul style="list-style-type: none"> Real estate tax exemption Stamp tax exemption Turnover tax exemption/deferral Tax stability 	<ul style="list-style-type: none"> Market barrier: Subsidies to consumption of fossil fuels. Tax breaks for companies investing in oil and gas. Tax incentives to promote exploration (ODI 2015) Institutional and administrative barrier: Public investment in fossil fuel power stations (ODI 2015) Market barrier: The availability of substantial amounts of natural gas and hydropower makes other sources uncompetitive (UNEP 2011) Financial barrier: Lack of support from financial institutions (EY 2016) 	<ul style="list-style-type: none"> <i>No ex-post impact study available.</i>
Colombia Law 1715 (Government of Colombia 2014) and its decree 2143 (Government of Colombia 2015) published 11/2015 and effective 02/2016 Law 1716 (2014) Art. 11 to 14	<ul style="list-style-type: none"> Four explicit fiscal incentives described in Laws 1716 and 1715 (Decree 2143): <ul style="list-style-type: none"> 50% tax break on investment over five years VAT exemption for equipment and machinery (local or foreign) associated with the project Accelerated depreciation of assets Exemption from import duty Tax exemptions for biofuels: some biofuel 	<ul style="list-style-type: none"> Market barrier: Subsidies for fossil fuels, although less, are still present (UPME 2015b). Techno-economic barrier: Lack of technical requirements to connect and operate wind parks and small solar PV projects (UPME 2015a). Market barrier: Oligopolies for conventional energy production (UPME 2015a). Market barrier: Slightly higher investment costs for renewable technology in comparison to conventional. Infrastructure barrier: Lack of transmission lines in areas with the 	<ul style="list-style-type: none"> <i>No ex-post impact study available.</i>

	plants are labelled tax-free zones (IRENA 2015b)	greatest potential for wind energy generation. <ul style="list-style-type: none"> • Public acceptance and environmental barrier: Competition with historical heritage interests in the area. • Lack of awareness and skilled personnel: Insufficient numbers of skilled workers and lack of training and education. 	
<p>Panama</p> <p>For all renewables: Law 45 (2004) Art. 9 and 10. For wind installations: Law 44 (2011) Art. 22.</p> <p>For wind installations: Law 37 (2013) Art. 20 and its reform (2016)) (Government of Panama 2013; Government of Panama 2016)</p>	<ul style="list-style-type: none"> • Available technologies: solar, wind, hydro, small hydro and geothermal • Incentives for the construction, operation and maintenance valid for a period of up to 20 years for solar and 10 years for other renewable energies. • For projects up to 0.5 MW (Climatescope 2015b): • Import tax exemptions • VAT exemptions • Income tax credit equivalent to up to 100% of direct investment for ten years. • For projects up to 10 MW (Climatescope 2015b): • Exemption from import, transmission and distribution taxes • Income tax credit equivalent to up to 50% of direct investment. • For projects up to 20 MW: • Exemption of transmission taxes (on the first 10 MW for 10 years) 	<ul style="list-style-type: none"> • Infrastructure barrier: Lack of transmission lines in areas with the greatest potential for wind energy generation (Extenda 2014). • Financial barrier: Absence of adequate funding opportunities and financing products for RE. • Market barrier: price structure that disadvantage renewables. • Lack of awareness and skilled personnel: Insufficient numbers of skilled workers and lack of training and education. • Public acceptance and environmental barrier: Competition with protected status in some potential areas. 	<ul style="list-style-type: none"> • <i>No ex-post impact study available.</i>
<p>California (USA)</p> <p>26 USC § 25D and § 48 established in 2005 (for solar), extended in 2008 and in 2015 (California Energy Commission 2015)</p> <p>26 USC § 45</p>	<ul style="list-style-type: none"> • Federal investment tax credit (ITC) • 30% for solar, fuels cells and small wind • 10% for geothermal, microturbines and CHP: • Federal renewable electricity production tax credit (PTC): • Available technologies include geothermal, wind, 	<ul style="list-style-type: none"> • Institutional and administrative barrier: State incentive programs can have complex eligibility requirements (California Energy Commission 2015). • Regulatory and policy uncertainty barrier: Financial incentive legislation for renewable energy has been volatile. Typically, extensions for tax credits are only given for a period between one to three years. • Regulatory and policy uncertainty 	<ul style="list-style-type: none"> • Residential and commercial solar ITC has helped annual solar installation grow by over 1,600% since 2006 - a compound annual growth rate of 76% (SEIA 2016).

<p>established in 1992 and subsequently amended numerous times (N.C. Clean Energy Technology Center 2016b)</p> <p>26 USC § 136 (1992)</p> <p>Cal Rev & Tax Code § 73 (2012) (N.C. Clean Energy Technology Center 2016a)</p>	<p>biomass, hydroelectric, municipal solid waste, landfill gas, tidal, wave, and ocean thermal.</p> <ul style="list-style-type: none"> • Non-taxable energy conservation subsidies: Applicable to residential solar-thermal and PV systems • Section 73 of the California Revenue and Taxation code: property tax exclusion of certain solar energy systems installed between 01/99 and 12/16 	<p>barrier: Barriers in environmental permitting due to strict requirements for large-scale renewable energy technologies (US EPA 2016).</p> <ul style="list-style-type: none"> • Infrastructure barrier: Constraints in existing transmission infrastructure (Department of the Navy 2012). 	<ul style="list-style-type: none"> • In years following PTC expiration, wind installations drop by approx. 80% (Spengler 2011).
<p>Indonesia</p> <p>Implemented by Government Regulation No. 1/2007 (amended by GR No. 62/2008 and GR No. 52/2011), MoF Regulation No. 21/2010, and MoF Regulation No. 130/2011 (Damuri & Atje 2012; PwC 2013)</p>	<ul style="list-style-type: none"> • Import duty and VAT exemption: import duty exemption on machinery and capital for development of power plants. Exemption from VAT on importation of taxable goods. • Income tax reduction: Reduction and various facilities for income tax on energy development projects, including net income reduction, accelerated depreciation, dividends reduced for foreign investors and compensation for losses. • Accelerated depreciation and amortisation: This allows investments to be depreciated within 2–10 years, depending on type of asset. This incentive would reduce the income tax paid by the investors and is expected to encourage expansion of investment (Government Regulation No. 1/2007). • An income tax reduction for foreign investors allows them to pay a rate of only 10 per cent on dividends they receive. • Income Tax holidays/reductions under “Pioneer Industries Facility”: Corporate Income Tax (CIT) exemption for 5-10 years, 50% reduction of CIT 	<ul style="list-style-type: none"> • Market barrier: The tariff for electricity set by the government is lower than the costs of production (indirect subsidy on conventional energy production). • Market barrier: Unequal tax burdens between conventional and renewable energy sources (WWF 2014). • Institutional and administrative barrier: Multilayer government approval procedures (IEA 2015). • Institutional and administrative barrier: Difficult licensing acquisition. • Regulatory and policy uncertainty barrier: Unclear regulations. 	<ul style="list-style-type: none"> • No company in the renewable energy sector has qualified as a pioneer to receive additional tax exemptions (tax holidays of 5-10 years) as of 04/2015 (Ministry of Finance Indonesia 2015). • No further ex-post impact study found.

	for two years after end of exemption period.		
--	--	--	--

Table C.4: Case studies of RE policies in the literature

Study	Author, Year	Case study countries	Type of policy	Link
Renewable Energy Auctions in Developing Countries	IRENA, 2013	Brazil, China, Morocco, Peru, South Africa	In-depth description of country case studies, including design characteristics and achieved auction outcomes for all case studies	https://www.irena.org/DocumentDownloads/Publications/IRENA_Renewable_energy_auctions_in_developing_countries.pdf
Taxes and incentives for renewable energy	KPMG, 2014	31 countries	Country profiles on all promotion policies; no information on achieved outputs linked to specific policies	https://www.kpmg.com/PE/es/IssuesAndInsights/ArticlesPublications/Documents/taxes-incentives-renewable-energy-14.pdf
Taxes and incentives for renewable energy	KPMG, 2015	31 countries	Country profiles on all promotion policies; no information on achieved outputs linked to specific policies	https://assets.kpmg.com/content/dam/kpmg/pdf/2015/09/taxes-and-incentives-2015-web-v2.pdf
Renewable Energy in Latin America 2015: An Overview of Policies	IRENA, 2015	20 countries in Central and South America	Overview of all implemented policies in the field of national policy, fiscal incentives and grid access, especially Table 1 (plus IRENA in-depth country profiles); No/limited information on achieved outputs linked to specific policies	http://www.irena.org/DocumentDownloads/Publications/IRENA_RE_Latin_America_Policies_2015.pdf
Powering Africa through Feed-in-Tariffs	World Future Council (WFC) & Heinrich Böll Stiftung (HBS), 2013	13 countries in Africa (“Pioneers” and “Late movers”)	Country profiles for each country with design characteristics and (short) impact assessment	https://ke.boell.org/sites/default/files/2013-03-powering-africa-through-feed-in-tariffs.pdf
Evaluation of feed-in tariff-schemes in African countries	Journal of Energy in Southern Africa, 2013	4 countries in Africa	Overview of FiT design choices; no information on achieved outputs/impacts	http://www.erc.uct.ac.za/sites/default/files/image_tool/images/19/jesa/24-1jesa-meyer.pdf
Performance and Impact of the Feed-in-Tariff Scheme: Review of	U.K. Department of Energy and Climate	Country case study for the UK	In-depth description of feed-in-tariff policy and impact/output assessment	https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/456181/FIT_Evidence_Review.pdf

Evidence	Finance, 2015			view.pdf
Comparison of Feed-in Tariffs and Tenders to Remunerate Solar Power Generation	DIW Berlin, 2015	Country case studies for Germany and France	Overview of FiT and tender policies in both countries	https://www.diw.de/documents/publikationen/73/diw_01.c.437464.de/dp1363.pdf
Ontario's Feed-in Tariff Program: Two-Year Review Report	Government of Ontario, 2012	Case study for Ontario (province in Canada)	Overview of FiT design and impact plus policy recommendation	http://www.energy.gov.on.ca/en/files/2011/10/FIT-Review-Report-en.pdf
A Policymaker's Guide to Feed-in Tariff Policy Design	NREL	Information overview for 5 countries	Information on FiT tariff payment levels for Germany, Spain, Ontario, Switzerland, Minnesota	http://www.nrel.gov/docs/fy10osti/44849.pdf

APPENDIX D: OVERVIEW OF COMBINED MARGIN APPROACH

The combined margin emission factor looks at the emissions impact of an addition of RE capacity to an electricity grid on the operation of existing plants (the *operating margin*) and future capacity additions (the *build margin*). A range of guidance and tools are available to assist users in calculating the emission factors of their grids. Table D.1 provides an overview of key relevant resources.

Table D.1: Resources available for estimating emission factors based on the combined margin approach

Resources	Description	Source
CDM Tool to calculate emission factor for an electricity system	<ul style="list-style-type: none"> Detailed guidance providing calculation methodology Country users use country level data to calculate grid emission factors Developed by UNFCCC secretariat 	Tool to calculate emission factor for an electricity system: https://cdm.unfccc.int/methodologies/PAMethodologies/tools/am-tool-07-v2.pdf/history_view
IGES List of Grid Emission Factors	<ul style="list-style-type: none"> Database of country-specific grid emission factors Collated from information provided in project design documents Developed by IGES and regularly updated 	List of Grid Emission Factors: https://pub.iges.or.jp/pub/list-grid-emission-factor
IGES CDM Grid Emission Factor Calculation Sheet	<ul style="list-style-type: none"> Excel-based calculation sheet based on the CDM tool Uses country level emission factor data collated from project design documents Developed by IGES 	Grid Emission Factor Calculation Sheet: https://pub.iges.or.jp/pub/iges-cdm-grid-emission-factor-calculation
International Financial Institutions' (IFI) Approach to GHG Accounting for Renewable Energy Projects	<ul style="list-style-type: none"> Guidelines for renewable energy projects 	IFI Approach to GHG Accounting for RE Projects: http://www.nib.int/filebank/a/1449216433/c78bcf00c64ba92b3a73673a2217be4d/5023-Joint_GHG_RE.pdf

Overview of CDM combined margin approach

The combined margin approach used in the CDM has gained wide technical and political acceptance over the years. The combined margin is calculated in the CDM Tool using the following formula:

$$EF_{[grid,CM,y]} = EF_{[grid,OM,y]} * W_{[OM,y]} + EF_{[grid,BM,y]} * W_{[BM,y]}$$

Where:

$EF_{grid, CM, y}$ = Combined margin emission factor for a defined timeframe y (tCO₂e/MWh)

$EF_{grid, OM, y}$ = Operating margin emission factor for a defined timeframe y (tCO₂e/MWh)

$EF_{grid, BM, y}$ = Build margin emission factor for a defined timeframe y (tCO₂e/MWh)

$w_{OM,y}$ = Weighting of operating margin emission factor (%)

$w_{BM,y}$ = Weighting of build margin emission factor (%)

The main steps of the CDM Tool are summarised as follows:

Step 1: Determine the operating margin ($EF_{grid, OM, y}$). Operating margin provides the GHG impact due to displacement of power generated from existing grid-connected power plants by the introduction of new capacity. The CDM Tool provides four calculation approaches for estimating the operating margin, outlined in Table D.2. The appropriate approach should be selected based on the composition of the generation mix, particularly on the extent of use of low cost/must run plants in the grid.²⁴

Table D.2: Overview of options for calculating operating margin

Options	Description
Simple operating margin	The emission factor is calculated as the power generation-weighted average of all power units supplying to the grid, except for low-cost/must-run plants.
Simple adjusted operating margin	If low-cost/must-run power plants generate a significant share of electricity (>50%) and daily load (average load > average lowest recorded hourly load over a year), these must be included in the simple operating margin calculation. In such cases, first the generation-weighted average emission rate is estimated separately for power plants that fall in the low-cost/must-run category and for the rest. Next, these two are weighted based on the number of hours when low-cost/must-run power units are on the margin in a year.
Average operating margin	The average operating margin emission factor is a simple average of all power plants that contribute to the grid, including low cost/must run plants.
Dispatch data analysis operating margin	The operating margin is calculated using the electricity displaced hourly by the project and the emission factor of the grid power units that are at the top of the dispatch order in that hour (whose power is replaced by the project). The dispatch order data is to be gathered from relevant authorities. The number of power plants at the top of the dispatch is calculated based on merit order. The approach requires annual monitoring.

Source: UNFCCC 2015.

Step 2: Calculate the build margin ($EF_{grid, BM, y}$). Build margin refers to the GHG impacts of future capacity expansion. The CDM recommends using historical data from most recently built power plants as a proxy for determining the make-up of future power units in the energy system.

$$EF_{grid, BM, y} = \frac{\sum_m EG_{m,y} \times EF_{EL,m,y}}{\sum_m EG_{m,y}}$$

Where:

$EF_{grid, BM, y}$ = Build margin emission factor (tCO₂e/MWh)

²⁴ Low-cost/must-run resources are power plants with low marginal generation costs or power plants that are dispatched independently of the daily or seasonal load of the grid (e.g., hydro, geothermal, wind, low-cost biomass, nuclear and solar generation) (UNFCCC 2015).

$EG_{m,y}$ = Electricity generated and delivered to the grid in a defined timeframe y (MWh)

$EF_{EL,m,y}$ = CO₂ emission factor for power plants m in a defined timeframe y (tCO₂e/MWh)

m = All power plants serving the grid in defined timeframe y except low-cost/must-run power units

y = defined timeframe (most recent historical year for which electricity data is available)

Step 3: Determine combined margin emission factor. The combined margin is calculated as a weighted average of the operating margin and build margin:

- The sum of the weighing factors for operating margin ($w_{OM,y}$) and build margin ($w_{BM,y}$) must be equal to 1.
- They must reflect the age of currently operational plants and expected future capacity additions.
- Common default values used in the CDM, are as follows:
 - Wind and solar: Operating margin, 0.75; build margin, 0.25
 - Other RE technologies: Operating margin, 0.5; build margin, 0.5

Selecting alternative weights for operating and build margin

The CDM Tool provides for some adjustments to the default weighting of operating and build margin. Users should consider the technology focus of the policy, the national electricity generation mix and load characteristics when determining whether the weightings should be adjusted. The CDM Tool provides further guidance on adjusting weights.

APPENDIX E: STAKEHOLDER PARTICIPATION DURING THE ASSESSMENT PROCESS

This appendix provides an overview of the ways that stakeholder participation can enhance the process for assessment of GHG impacts of renewable energy policies. Table E.1 provides a summary of the steps in the assessment process where stakeholder participation is recommended and why it is important, explaining where relevant guidance can be found in the ICAT *Stakeholder Participation Guidance*.

Table E.1 List of steps where stakeholder participation is recommended in the impact assessment

Chapter/step in this guidance document	Why stakeholder participation is important at this step	Relevant chapters in <i>Stakeholder Participation Guidance</i>
Chapter 2 – Objectives of assessing GHG impacts of RE policies	Ensure that the objectives of the assessment respond to the needs and interests of stakeholders	Chapter 5 – Identifying and understanding stakeholders
Chapter 4 – Steps and assessment principles Section 4.1.4 Planning the assessment	Build understanding, participation and support for the policy or action among stakeholders Ensure conformity with national and international laws and norms, as well as donor requirements related to stakeholder participation Identify and plan how to engage stakeholder groups who may be affected or may influence the policy or action Coordinate participation at multiple steps for this assessment with participation in other stages of the policy design and implementation cycle and other assessments	Chapter 4 – Planning effective stakeholder participation Chapter 5 – Identifying and understanding stakeholders Chapter 6 – Establishing multi-stakeholder bodies Chapter 9 – Establishing grievance redress mechanisms
Chapter 6 – Identifying impacts: How RE policies reduce GHG emissions	Enhance completeness of the list of GHG impacts with stakeholder insights Improve and validate causal chain with stakeholder insights on cause-effect relationships between the policy, behaviour change and expected impacts	Chapter 5 – Identifying and understanding stakeholders Chapter 8 – Designing and conducting consultations
Chapter 7 – Estimating RE addition of the policy	Improve identification of barriers and evaluation of their severity with stakeholder insights	Chapter 8 – Designing and conducting consultations
Chapter 10 – Monitoring performance over time	Ensure monitoring frequency addresses the needs of decision makers and other stakeholders	Chapter 8 – Designing and conducting consultations
Chapter 11- Reporting	Raise awareness of benefits and other impacts to build support for the policy or action Inform decision makers and other stakeholders about impacts to facilitate adaptive management Increase accountability and transparency and thereby credibility and acceptance of the assessment	Chapter 7 – Providing information to stakeholders

ABBREVIATIONS AND ACRONYMS

CDM	Clean Development Mechanism
GHG	Greenhouse gas
GIZ	Deutsche Gesellschaft für Internationale Zusammenarbeit GmbH
ICAT	Initiative for Climate Action Transparency
IPCC	Intergovernmental Panel on Climate Change
NDC	Nationally Determined Contribution
MRV	Measurement, Reporting and Verification
NAMA	Nationally Appropriate Mitigation Action
UNFCCC	United Nations Framework Convention on Climate Change
VCS	Verified Carbon Standard
WRI	World Resources Institute

GLOSSARY

Activities	The administrative activities involved in implementing the policy (undertaken by the authority or entity that implements the policy), such as permitting, licensing, procurement, or compliance and enforcement.
Assessment period	The time period over which GHG impacts resulting from a policy are assessed
Assessment report	A report, completed by the user, that documents the assessment process and the GHG, sustainable development and/or transformational impacts of the policy
Barrier	Any obstacle to developing and deploying a renewable energy (RE) potential that can be overcome or attenuated by a policy, programme or measure.
Baseline scenario	A reference case that represents the events or conditions most likely to occur in the absence of a policy (or package of policies) being assessed
Causal chain	A conceptual diagram tracing the process by which the policy leads to impacts through a series of interlinked logical and sequential stages of cause-and-effect relationships
Emission factor	A factor that converts activity data into GHG emissions data
Ex-ante assessment	The process of estimating expected future GHG impacts of a policy (i.e., a forward-looking assessment)
Ex-post assessment	The process of estimating historical GHG impacts of a policy (i.e., a backward-looking assessment)
Expert judgment	A carefully considered, well-documented qualitative or quantitative judgment made in the absence of unequivocal observational evidence by a person or persons who have a demonstrable expertise in the given field (IPCC 2006).
Feed-in tariff	The price per unit of electricity that a utility or power supplier has to pay for distributed or renewable electricity fed into the grid by non-utility generators.
GHG assessment boundary	The scope of the assessment in terms of the range of GHG impacts that is included in the assessment
GHG impacts	Changes in GHG emissions by sources that result from a policy
Electricity grid (grid)	A network consisting of wires, switches and transformers to transmit electricity from power sources to power users. A large network is layered from low-voltage (110-240 V) distribution, over intermediate voltage (1-50 kV) to high-voltage (above 50 kV to MV) transport subsystems. Interconnected grids cover large areas up to

	continents. The grid is a power exchange platform enhancing supply reliability and economies of scale.
Grid access	Refers to the acceptance of power producers to deliver to the electricity grid
Impact assessment	The estimation of changes in GHG emissions or removals resulting from a policy, either ex-ante or ex-post
In-jurisdiction impacts	Impacts that occur inside the geopolitical boundary over which the implementing entity has authority, such as a city boundary or national boundary
Independent policies	Policies that do not interact with each other, such that the combined effect of implementing the policies together is equal to the sum of the individual effects of implementing them separately.
Inputs	Resources that go into implementing the policy, such as financing
Intended impacts	Impacts that are intentional based on the original objectives of the policy. In some contexts, these are referred to as primary impacts.
Interacting policies	Policies that produce total effects, when implemented together, that differ from the sum of the individual effects had they been implemented separately
Intermediate effects	Changes in behaviour, technology, processes, or practices that result from the policy, which lead to GHG impacts
Jurisdiction	The geographic area within which an entity's (such as a government's) authority is exercised
Key performance indicator (indicator)	A metric that indicates the performance of a policy
Levelised Cost of Electricity (LCOE)	The unique cost price of the outputs (US cent/kWh or USD/GJ) of a project that makes the present value of the revenues (benefits) equal to the present value of the costs over the lifetime of the project
Long-term impacts	Impacts that are more distant in time, based on the amount of time between implementation of the policy and the impact
Monitoring period	The time over which the policy is monitored, which may include pre-policy monitoring and post-policy monitoring in addition to the policy implementation period
Negative impacts	Impacts that are perceived as unfavourable from the perspectives of decision makers and stakeholders.
Net metering	The practice of using a single meter to measure consumption and generation of electricity by a small generation facility (such as a house with a wind or solar photovoltaic system). The net energy

	produced or consumed is purchased from or sold to the power provider, respectively.
Non-policy drivers	Conditions other than RE policies, such as socioeconomic factors and market forces, that are expected to affect the emissions sources included in the GHG assessment boundary
Out-of-jurisdiction impacts	Impacts that occur outside the geopolitical boundary over which the implementing entity has authority, such as a city boundary or national boundary
Overlapping policies	Policies that interact with each other and that, when implemented together, have a combined effect less than the sum of their individual effects when implemented separately. This includes both policies that have the same or complementary goals (such as national and subnational energy efficiency standards for appliances), as well as counteracting or countervailing policies that have different or opposing goals (such as a fuel tax and a fuel subsidy).
Parameter	A variable such as activity data or emission factors that are needed to estimate GHG impacts
Policy or action	An intervention taken or mandated by a government, institution, or other entity, which may include laws, regulations, and standards; taxes, charges, subsidies, and incentives; information instruments; voluntary agreements; implementation of new technologies, processes, or practices; and public or private sector financing and investment, among others
Policy implementation period	The time period during which the policy is in effect
Policy scenario	A scenario that represents the events or conditions most likely to occur in the presence of the policy (or package of RE policies) being assessed. The policy scenario is the same as the baseline scenario except that it includes the policy (or package of policies) being assessed.
Positive impacts	Impacts that are perceived as favourable from the perspectives of decision makers and stakeholders
Power purchase agreement (PPA)	A contract between an electricity generator and an electricity consumer (or distributor). Historically, PPAs have been frequently signed between utilities and independent power producers as a way for the utility to procure additional generation. In recent years, PPAs have been used as a way for power consumers to purchase

	electricity, often from solar systems, from a third-party developer (NREL). ²⁵
RE addition	The additional installation of renewable energy capacity or electricity generation from renewable sources realised via the policy, expressed in megawatts (MW) or megawatt-hours (MWh) respectively
Reinforcing policies	Policies that interact with each other and that, when implemented together, have a combined effect greater than the sum of their individual effects when implemented separately
Renewable energy	Any form of energy from solar, geophysical or biological sources that is replenished by natural processes at a rate that equals or exceeds its rate of use. Renewable energy is obtained from the continuing or repetitive flows of energy occurring in the natural environment and includes low-carbon technologies such as solar energy, hydropower, wind, tide and waves and ocean thermal energy, as well as renewable fuels such as biomass.
Renewable portfolio standard	A legal mandate that require utilities to procure a certain percentage or flat amount of renewable electricity or power based on their total generation. Utilities can procure the renewable energy via direct ownership or the purchase of renewable energy credits (NREL). ²⁶
Short-term impacts	Impacts that are nearer in time, based on the amount of time between implementation of the policy and the impact
Solar energy	Energy from the sun that is captured either as heat, as light that is converted into chemical energy by natural or artificial photosynthesis, or by photovoltaic panels and converted directly into electricity
Stakeholders	People, organisations, communities or individuals who are affected by and/or who have influence or power over the policy
Sustainable development impacts	Changes in environmental, social, or economic conditions that result from a policy, such as changes in economic activity, employment, public health, air quality, and energy security
Transmission and distribution	The network that transmits electricity through wires from where it is generated to where it is used. The distribution system refers to the lower-voltage system that delivers the electricity to the end consumer.

²⁵ Available at: <https://financere.nrel.gov/finance/content/glossary>.

²⁶ Available at: <https://financere.nrel.gov/finance/content/glossary>.

Uncertainty	1. Quantitative definition: Measurement that characterises the dispersion of values that could reasonably be attributed to a parameter. 2. Qualitative definition: A general term that refers to the lack of certainty in data and methodological choices, such as the application of non-representative factors or methods, incomplete data, or lack of transparency.
Unintended impacts	Impacts that are unintentional based on the original objectives of the policy. In some contexts, these are referred to as secondary impacts.
Utility	An entity in the electric power industry that engages in electricity generation and distribution of electricity for sale, generally in a regulated market
Weighted average cost of capital (WACC)	The rate that a company is expected to pay on average to all its security holders to finance its assets, including the fraction of each financing source in the company's capital structure

REFERENCES

- Aaskov, F. and J. Tallat-Kelpšaitė. 2015. *Keep on Track! Project National Report: United Kingdom*. Available at: http://www.keepontrack.eu/contents/keeptrackcountryfactsheet/kot_year-3_barriers-report_uk_final.pdf.
- ADB. 2015. *Renewable Energy Developments and Potential in the Greater Mekong Subregion*. Available at: <https://www.adb.org/sites/default/files/publication/161898/renewable-energy-developments-gms.pdf>.
- Argentina, G. 2006. *Energia Electrica (Ley 26.190)*. Available at: <http://servicios.infoleg.gob.ar/infolegInternet/anexos/120000-124999/123565/norma.htm>.
- Azuela, G.E., et al. 2014. *Performance of Renewable Energy Auctions. Experience in Brazil, China and India*. World Bank Policy Research Working Paper, (WPS7062). Available at: <http://documents.worldbank.org/curated/en/842071468020372456/pdf/WPS7062.pdf>.
- Bank, T.W. and L. Weischer. 2012a. *Achieving development goals with renewable energy: the case of Tanzania*. Available at: http://cdkn.org/wp-content/uploads/2011/12/Tanzania-Power-InsideStory_6pp_final_low-res1.pdf.
- Beerepoot, M., et al. 2013. *Incentives for Renewable Energy in Southeast Asia: Case study of Thailand*. Available at: http://www.iisd.org/pdf/2013/investment_incentives_thailand.pdf.
- BETTER. 2013. *Policy Brief - Future Prospects for RES Cooperation Mechanisms in North Africa*. Available at: <http://www.medspring.eu/sites/default/files/BETTER-4th-policy-brief-NAfrica.pdf>.
- Bruckner, T., et al. 2014. *Energy Systems*. O. Edenhofer et al., eds., Cambridge, United Kingdom and New York, NY, USA: Cambridge University Press.
- California Energy Commission. 2015a. *Tracking Progress: Resource Flexibility*. Available at: http://www.energy.ca.gov/renewables/tracking_progress/documents/renewable.pdf.
- Chaianong, A. and C. Pharino. 2015. *Outlook and challenges for promoting solar photovoltaic rooftops in Thailand*. *Renewable and Sustainable Energy Reviews*, 48 (August 2015), pp.356–372.
- Climatescope. 2015a. *Argentina Renewable Energy Tax Incentives..* Available at: <http://global-climatescope.org/en/country/argentina/#/details>.
- Climatescope. 2015b. *Panama*. Available at: <http://global-climatescope.org/en/country/panama/#/details>.
- Currie, S., A. Lapierre., and A. Malek. 2016. *Renewable energy in Morocco*. Available at: <http://www.nortonrosefulbright.com/knowledge/publications/66419/renewable-energy-in-morocco>.
- Damuri, Y.R. and R. Atje. 2012. *Investment Incentives for Renewable Energy: Case study of Indonesia*. Available at: https://www.iisd.org/sites/default/files/publications/investment_incentives_indonesia.pdf.
- Department of the Navy. 2012. *Barriers/Issues Impacting Renewable Energy Development in California*. Available at: http://www.energy.ca.gov/2012_energy_policy/documents/2012-05-10_workshop/comments/Navy_Renewable_Energy_Barriers.pdf.
- Eberhard, A., J. Kolker, and J. Leigland. 2014. *South Africa's Renewable Energy IPP Procurement Program: Success Factors and Lessons*. Available at: <http://www.ee.co.za/article/south-africas-reipp-programme-success-factors-lessons.html>.

Ecofys. 2013. *Lessons for the tendering system for renewable electricity in South Africa from international experience in Brazil, Morocco and Peru*. Available at: <http://www.ecofys.com/files/files/ecofys-giz-2013-international-experience-res-tendering.pdf>.

Edenhofer, O., et al. 2011. *IPCC Special Report on Renewable Energy Sources and Climate Change Mitigation*. O. Edenhofer et al., eds., Cambridge; New York: Cambridge University Press.

European Forum for Renewable Energy Sources. 2015. *EU Tracking Roadmap 2015*. Available at: http://www.keepontrack.eu/contents/publicationseutrackingroadmap/eu_roadmap_2015.pdf.

Extenda. 2014. *Nota Sectorial Energías Renovables*. Available at: <http://www.extenda.es/web/opencms/fondo-documental/lectorFondo.jsp?uid=ef9320ad-e36b-11e4-97cd-45b59dd918b9>.

EY. 2016. *Country focus: Argentina*. Available at: <http://www.ey.com/gl/en/industries/power---utilities/recai---argentina>.

Förster, S. and A. Amazo. 2015. *Auctions for Renewable Energy Support in Germany: Instruments and Lessons Learnt*. Available at: http://www.auresproject.eu/files/media/documents/country-report_germany2.pdf.

Förster, S., and F. Wigand. 2016a. *Onshore wind concession auctions in China : Instruments and lessons learnt*. Available at: http://auresproject.eu/sites/ares.eu/files/media/countryreports/pdf_china.pdf.

Garmendia, M. 2012. *Diseño de instrumentos de mercado para captar el potencial de cogeneración en Uruguay*. Available at: <http://www.dne.gub.uy/-/diseno-de-instrumentos-de-mercado-para-captar-el-potencial-de-cogeneracion-en-uruguay>.

GIZ. 2011. *Climate results - The GIZ sourcebook for climate-specific monitoring in the context of international cooperation*. Available at: <https://www.transparency-partnership.net/giz-2011-climate-results-giz-sourcebook-climate-specific-monitoring-context-international-cooperatio>.

GIZ. 2015. *Renewable energy auctions: Goal-oriented policy design*. Available at: [https://energypedia.info/images/f/fe/Renewable_Energy_Auctions_\(GIZ\).pdf](https://energypedia.info/images/f/fe/Renewable_Energy_Auctions_(GIZ).pdf).

Glemarec, Y., W. Rickerson, and O. Waissbein. 2012. *Transforming on-grid renewable energy markets*. Available at: <http://scholar.google.com/scholar?hl=en&btnG=Search&q=intitle:Transforming+On-Grid+Renewable+Energy+Markets#1>.

Government of Argentina. 1998. *Regimen Nacional de Energia Eolica z Solar (Ley 25.019)*. Available at: <http://servicios.infoleg.gob.ar/infolegInternet/anexos/50000-54999/53790/texact.htm>.

Government of Argentina. 2015. *Energia Electrica (Ley 27191)*. Available at: http://www.melectrico.com.ar/web/pdfs/Ley_27191.pdf.

Government of Colombia. 2014. *Ley 1715 DE 2014*. Available at: https://www.fcm.org.co/ActualidadNormativaYJurisprudencia/boletin-juridico-municipal/Documents/ley_1715_de_2014.pdf.

Government of Colombia. 2015. *Decreto N° 2143*. Available at: http://wp.presidencia.gov.co/sitios/normativa/decretos/2015/Decretos2015/DECRETO_2143_DEL_04_DE_NOVIEMBRE_DE_2015.pdf.

Government of Panama. 2013. *Ley No 37, Ley No 38, Ley No 39, Ley No 40, Ley No 86, Ley No 88*. Available at: http://gacetitas.procuraduria-admon.gob.pa/27308_2013.pdf.

Government of Panama. 2016. *Anteproyecto de Ley N° 021*. Available at: http://www.asamblea.gob.pa/proyley/2015_P_267.pdf.

Government of Uruguay. 2010. *Decreto N° 367/010*. Available at: [http://www.ursea.gub.uy/web/mnormativo2.nsf/E8EBCED3D54849DC8325794C00409550/\\$file/No_367-010.pdf?OpenElement](http://www.ursea.gub.uy/web/mnormativo2.nsf/E8EBCED3D54849DC8325794C00409550/$file/No_367-010.pdf?OpenElement).

Held, A., et al. 2014. *Design features of support schemes for renewable electricity*. Available at: http://www.ehpa.org/media/studies-and-reports/eu-studies-and-reports/?eID=dam_frontend_push&docID=1766.

IEA. 2015. *Energy and Climate Change: World Energy Outlook Special Report*. Available at <https://www.iea.org/publications/freepublications/publication/WEO2015SpecialReportonEnergyandClimateChange.pdf>.

IRENA. 2012. *Handbook on Renewable Energy Nationally Appropriate Mitigation Actions (NAMAs) for Policy Makers and Project Developers*. Available at: http://www.irena.org/DocumentDownloads/Publications/Handbook_RE_NAMAs.pdf.

IRENA. 2013. *Renewable Energy Auctions in Developing Countries*. Available at: https://www.irena.org/DocumentDownloads/Publications/IRENA_Renewable_energy_auctions_in_developing_countries.pdf.

IRENA. 2015a. *Renewable Energy Auctions: A Guide to Design*. Available at: http://www.irena.org/DocumentDownloads/Publications/Renewable_Energy_Auctions_A_Guide_to_Design.pdf.

IRENA. 2015b. *Renewable Energy in Latin America 2015: An Overview of Policies*. Available at: http://www.irena.org/DocumentDownloads/Publications/IRENA_RE_Latin_America_Policies_2015.pdf.

IRENA. 2015c. *Renewable Energy Policy Brief: Argentina*. Available at: http://www.irena.org/DocumentDownloads/Publications/IRENA_RE_Latin_America_Policies_2015_Country_Argentina.pdf.

IRENA. 2015d. *Renewable Energy Policy Brief: Brazil*. Available at: http://www.irena.org/DocumentDownloads/Publications/IRENA_RE_Latin_America_Policies_2015_Country_Brazil.pdf.

IRENA. 2015e. *Renewable Energy Policy Brief: Uruguay*. Available at: http://www.irena.org/DocumentDownloads/Publications/IRENA_RE_Latin_America_Policies_2015_Country_Uruguay.pdf.

KPMG. 2012. *Taxes and Incentives for Renewable Energy*. Available at: <https://www.kpmg.com/UY/es/Prensa/KPMG-Internacional/Documents/Taxes-incentives-renewable-2012.pdf>.

Meyer-Renschhausen, M. 2013. *Evaluation of feed-in tariff-schemes in African countries*. *Journal of Energy in Southern Africa*, 24(1), pp.56–65. Available at: http://www.erc.uct.ac.za/sites/default/files/image_tool/images/119/jesa/24-1jesa-meyer.pdf.

- Ministry of Finance Indonesia. 2015. *A Coherent Fiscal Policy Framework for Promoting Renewable Energies and Energy Efficiency in Indonesia*. Available at: <http://www.vivideconomics.com/wp-content/uploads/2015/10/34a-Final-Report-Consolidated-Renewable-Energy-and-Energy-Efficiency-English.pdf>.
- N.C. Clean Energy Technology Center. 2016a. *Property Tax Exclusion for Solar Energy Systems*. Available at: <http://programs.dsireusa.org/system/program/detail/558>.
- N.C. Clean Energy Technology Center. 2016b. *Renewable Electricity Production Tax Credit (PTC)*. Available at: <http://programs.dsireusa.org/system/program/detail/734>.
- Next Kraftwerke. 2016. *Types of electricity markets*. Available at: <https://www.next-kraftwerke.be/en/knowledge-hub/types-of-electricity-markets/>.
- Nganga, J., M. Wohler, and M. Woods. 2013. *Powering Africa through Feed-in Tariffs. Advancing Renewable Energy to Meet the Continent's Electricity Needs*. Available at: http://www.foe.co.uk/sites/default/files/downloads/powering_africa_summary.pdf.
- ODI. 2015. *G20 subsidies to oil, gas and coal production: Argentina*. Available at: <https://www.odi.org/sites/odi.org.uk/files/odi-assets/publications-opinion-files/9994.pdf>.
- Pacudan, R. 2014. *Electricity Price Impacts of Feed-in Tariff Policies: The Cases of Malaysia, the Philippines, and Thailand*. In P. Han & F. Kimura, eds. *Energy Market Integration in East Asia: Energy Trade, Cross Border Electricity, and Price Mechanism*. Jakarta; Indonesia: ERIA Research Project Report FY2013, pp. 283–319. Available at: http://www.eria.org/RPR_FY2013_No.29_Chapter_11.pdf.
- PwC. 2013. *Electricity in Indonesia - Investment and Taxation Guide*. Available at: <http://www.pwc.com/id/en/publications/assets/electricity-guide-2013.pdf>.
- PwC and Eversheds. 2016. *Developing renewable energy projects - A guide to achieving success in the Middle East*. Available at: <https://www.pwc.com/m1/en/publications/documents/eversheds-pwc-developing-renewable-energy-projects.pdf>.
- REN21 (2016) *Glossary*. Available at: http://www.ren21.net/?albdesign_popup_cpt=glossary.
- Renewable Energy Association. 2015. *United Kingdom - Key trends in RES sector*. Available at: http://www.keepontrack.eu/contents/keeptrackcountryfactsheet/pr_uk.pdf.
- Reuters. 2016. *Morocco to tender for 800 MW solar plants by start of 2017*. Available at: <http://www.reuters.com/article/morocco-solar-erngy-idUSL8N1DF595>.
- del Río, P. 2015. *Auctions for Renewable Energy Support in South Africa: Instruments and lessons learnt*. Available at: http://www.auresproject.eu/files/media/documents/country-report_germany2.pdf.
- Röser, F. and M. Hagemann. 2015. *Sustainable energy production from biomass waste in Peru NAMA proposal*. Available at: http://www.mitigationmomentum.org/downloads/NAMA-proposal-for-sustainable-energy-production-from-biomass-waste-in-Peru_November%202015.pdf.
- Sawangphol, N. and C. Pharino. 2011. *Status and outlook for Thailand's low carbon electricity development*. *Renewable and Sustainable Energy Reviews*. 15(1), pp.564–573.
- SEIA. 2016. *Solar Investment Tax Credit (ITC)*. Available at: <http://www.seia.org/policy/finance-tax/solar-investment-tax-credit>.

- SolarPower Europe. 2016. *Tenders for solar projects*. Available at: http://www.solarpowereurope.org/fileadmin/user_upload/documents/Policy_Papers/Tenders_for_solar_FINAL_VERSION_004_.pdf.
- Spengler, E.S. 2011. *A shift in the wind: The siting of wind power projects on public lands in the Obama era*. Indiana Law Journal, pp.1–38. Available at: http://ilj.law.indiana.edu/articles/86/86_3_Spengler.pdf.
- Terra, R. and D. Schenzer. 2014. *Barreras para la implantación de pequeñas centrales hidroeléctricas*. Available at: <http://www.dne.gub.uy/documents/48237/3889922/BarrerasImplantacionPCH.pdf>.
- Tongsopit, S. 2014. *Thailand's Feed-in Tariffs for Solar Power: Calculation, Impacts, and Future Directions*. Available at: http://esi.nus.edu.sg/docs/default-source/event/sopitsuda_thailandssolarfit.pdf?sfvrsn=2.
- Tongsopit, S. and C. Greacen. 2012. *Thailand's Renewable Energy Policy: FITs and Opportunities for International Support*. Available at: <http://www.palangthai.org/docs/ThailandFITtongsopit&greacen.pdf>.
- UK Department of Energy and Climate Change. 2015. *Performance and Impact of the Feed-in Tariff Scheme: Review of Evidence*. Available at: https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/456181/FIT_Evidence_Review.pdf.
- UNEP. 2011. *Diffusion of renewable energy technologies. Case studies of enabling frameworks in developing countries*. Available at: <http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.459.7438&rep=rep1&type=pdf#page=129>.
- UNEP (2012) *Feed in tariffs as a Policy Instrument for Promoting Renewable Energies and Green Economies in Developing Countries*. Available at: https://unfccc.int/files/documentation/submissions_from_parties/adp/application/pdf/unep_us_ws2.pdf.
- UNFCCC. 2015. *CDM: Tool to calculate the emission factor for an electricity system*, Version 5.0 Guidance document. Available at: https://cdm.unfccc.int/methodologies/PAmethodologies/tools/am-tool-07-v2.pdf/history_view.
- UNFCCC. 2016. *CDM: ACM0002: Grid-connected electricity generation from renewable sources*, Version 17. Guidance document. Available at: <https://cdm.unfccc.int/UserManagement/FileStorage/D5YFS9I3VKBT18MQNGX0LPZ6U7AWCO>.
- UPME. 2015a. *Integración de las energías renovables no convencionales en Colombia*. Available at: http://www.upme.gov.co/Estudios/2015/Integracion_Energias_Renovables/INTEGRACION_ENERGIAS_RENOVANLES_WEB.pdf.
- UPME. 2015b. *Plan Energetico Nacional Colombia: Ideario Energético 2050*. Available at: http://www.upme.gov.co/Docs/PEN/PEN_IdearioEnergetico2050.pdf.
- US EPA. 2016. *State Renewable Energy*. Available at: <https://www.epa.gov/statelocalclimate/state-renewable-energy>.
- World Resources Institute (WRI). 2014. *Greenhouse Gas Protocol Policy and Action Standard*. Available at: <http://www.ghgprotocol.org/policy-and-action-standard>.
- WWF. 2014. *Sustainable Energy Finance in Indonesia*. Available at: http://awsassets.wwf.or.id/downloads/sustainable_energy_finance_in_indonesia.pdf.

CONTRIBUTORS

Guidance development leads

Markus Hagemann, NewClimate Institute (technical lead)

Frederic Hans, NewClimate Institute (co-lead)

Heather Jacobs, VCS (co-lead)

Drafting team

Jerry Seager, VCS

Maria Jose de Villafranca Casas, NewClimate Institute

Niklas Höhne, NewClimate Institute

Ritika Tewari, NewClimate Institute

Technical working group

Bamshad Houshyani, Greenovation (lead reviewer)

Chirag Gajjar, WRI India

Derik Broekhoff, Stockholm Environment Institute

Ernst Worrell, Utrecht University

Gil Nemesh, Independent consultant

Jongikaya Witi, Independent Climate Change Mitigation MRV Expert (lead reviewer)

Jorge Rodrigues de Almeida, RdA – Climate Solutions

Matthew Brander, University of Edinburgh

Miao Ren, Energy Institute, China

Miquel Muñoz, Boston University Global Economic Governance Initiative (lead reviewer)

Sina Wartmann, Ricardo Energy & Environment

Stan Kolar, Center for Clean Air Policy

Steve Thorne, Independent consultant

Willy Alarcon, GIZ